



COMMON MODE CHOKE
S570-1328-00

Bel provides a self leaded, surface mount, low current, common mode choke.

SCHEMATIC




MECHANICALS

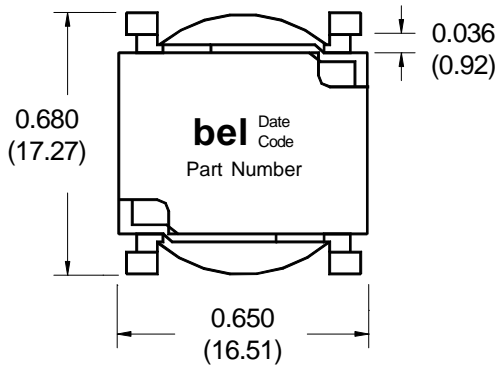

All dimensions are in inches(mm).
Dimension Tolerance is +/- 0.02(0.51) unless otherwise specified.

SUGGESTED PAD LAYOUT

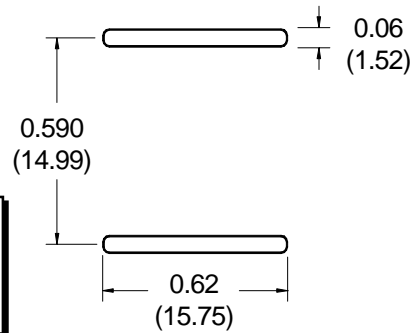

ELECTRICALS @ 25° C

Part Number	Primary Inductance OCL(μH) +/- 10%	Peak Current (DC Amps) Max	Switching Frequency (KHz)	DCR (Ω) Max
S570-1328-00	50	1.5	300	0.15

Primary Inductance is 40μH typical at peak current.

Corporate Office
Bel Fuse Inc.
198 Van Vorst Street, Jersey City, NJ 07302-4496
Tel: 201-432-0463
Fax: 201-432-9542
E-Mail: BelFuse@belfuse.com
Internet: <http://www.belfuse.com>

Far East Office
Bel Fuse Ltd.
8F/8 Luk Hop Street
San Po Kong
Kowloon, Hong Kong
Tel: 852-2328-5515
Fax: 852-2352-3706

European Office
Bel Fuse Europe Ltd.
Preston Technology Management Centre
Marsh Lane, Preston PR1 8UD
Lancashire, U.K.
Tel: 44-1772-556601
Fax: 44-1772-888366