



PRELIMINARY

SOLID STATE DEVICES, INC


14849 Firestone Boulevard · La Mirada, CA 90638
Phone: (714) 670-SSDI (7734) · Fax: (714) 522-7424

**SDR600
thru
SDR608**

Designer's Data Sheet

**15 AMP
50-800 VOLTS
45-60 nsec
ULTRA FAST
RECTIFIER**

- FEATURES:**
- Ultra Fast Recovery: 45-60 nsec Maximum
 - PIV to 700 Volts
 - Low Reverse Leakage Current
 - Hermetically Sealed
 - Single Chip Construction
 - High Surge Current: 250 Amps
 - Also available in 2 Pin TO-59 or TO-111
 - Isolated Package Upon Request
 - TX, TXV, and Space Level Screening Available

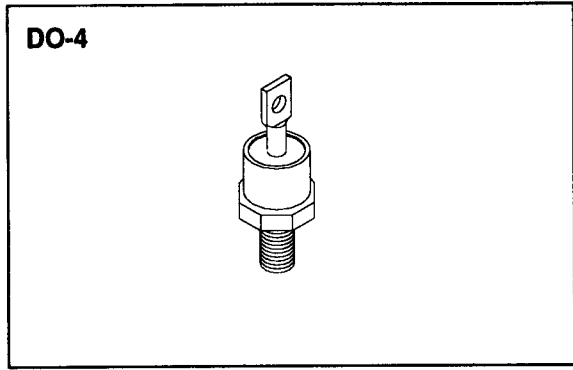

MAXIMUM RATINGS

RATING	SYMBOL	VALUE	UNIT
Peak Repetitive Reverse and DC Blocking Voltage	VRRM	50	Volts
		100	
		200	
	VRWM	300	
		400	
		500	
	VR	600	
		700	
		800	
Average Rectified Forward Current (Resistive Load, 60Hz, Sine Wave, TA=25°C)	IO	15	Amps
Peak Surge Current (8.3 ms Pulse, Half Sine Wave, TA=25°C)	IFSM	250	Amps
Operating and storage temperature	Top & Tstg	-65 to +175	°C
Maximum Thermal Resistance Junction to Case	RθJC	2.5	°C/W

NOTE: All specifications are subject to change without notification. SCD's for these devices should be reviewed by SSDI prior to release.

DATA SHEET #: RU0019 A

RMD

SDR600 thru SDR608

PRELIMINARY




SOLID STATE DEVICES, INC

14849 Firestone Boulevard · La Mirada, CA 90638
Phone: (714) 670-SSDI (7734) · Fax: (714) 522-7424

ELECTRICAL CHARACTERISTICS

CHARACTERISTICS		SYMBOL	MAXIMUM	UNIT
Instantaneous Forward Voltage Drop ($I_F = 15 \text{ Adc}$, $T_A = 25^\circ\text{C}$, 300 μs Pulse)	SDR600-605	VF	1.3	Vdc
	SDR606-608		1.8	
Instantaneous Forward Voltage Drop ($I_F = 15 \text{ Adc}$, $T_A = -55^\circ\text{C}$, 300 μs Pulse)	SDR600-605	VF	1.45	Vdc
	SDR606-608		1.95	
Reverse Leakage Current (Rated V_R , $T_A = 25^\circ\text{C}$, 300 μs pulse minimum)		IR	50	μA
Reverse Leakage Current (Rated V_R , $T_A = 100^\circ\text{C}$, 300 μs pulse minimum)		IR	10	mA
Junction Capacitance ($V_R = 10 \text{ Vdc}$, $T_A = 25^\circ\text{C}$, $f = 1 \text{ MHz}$)		CJ	150	pf
Reverse Recovery Time ($I_F = 500\text{ma}$, $I_R = 1\text{A}$, $I_{RR} = 250\text{mA}$, $T_A = 25^\circ\text{C}$)	SDR600-605	trr	45	nsec
	SDR606		50	
	SDR607-608		60	

CASE OUTLINE: DO-4

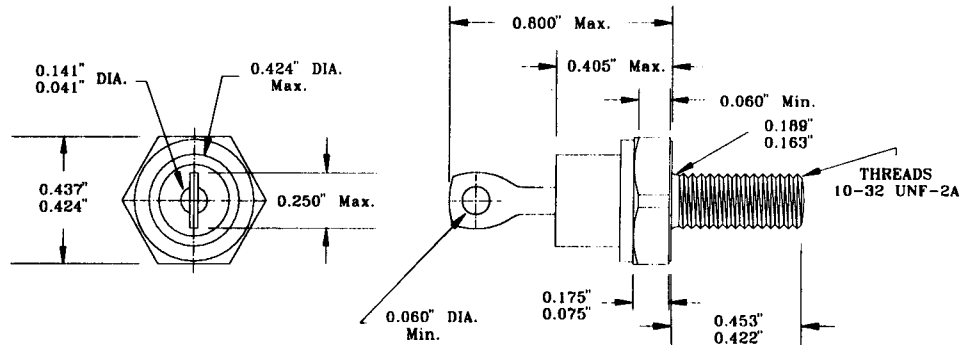

TYPICAL OPERATING CURVES $T_A = 25^\circ\text{C}$ Unless otherwise specified

