




TL432C

LINEAR INTEGRATED CIRCUIT

**1.24V PRECISION
ADJUSTABLE SHUNT
REFERENCE REGULATORS**

■ DESCRIPTION

The UTC **TL432C** is a three-terminal adjustable shunt regulator highly accurate 1.24V bandgap reference with 1%, 2% tolerance. The device offers thermal stability, wide operating current (50mA) and an extended temperature range of 0° to 105°C for operation in power supply applications. The UTC **TL432C** offers a wide operating voltage range of up to 12V and is an excellent choice for voltage reference requirements in an isolated feedback circuit for 3.0V ~ 3.3V switching mode power supplies. The tight tolerance guarantees a lower design cost for the power supply manufacturer by virtually eliminating the need for an extra power supply manufacturing process of the power supply.

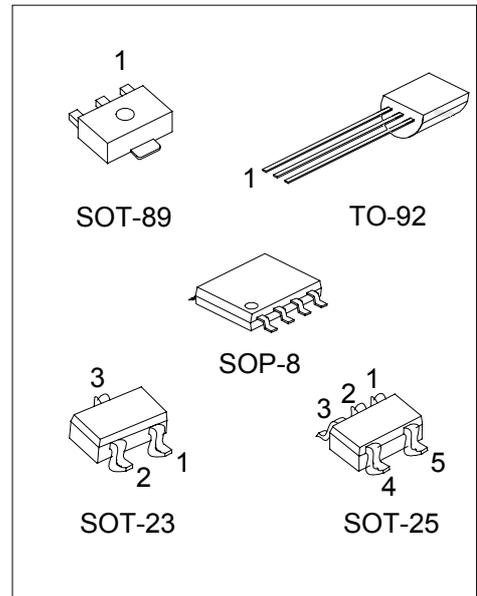

*Pb-free plating product number: TL432CL

■ FEATURES

- *Temperature-Compensated: 50ppm/°C
- *Internal amplifier with 50mA capability
- *Nominal temperature range extended to 105°C
- *Low frequency dynamic output impedance: <150mΩ
- *Low Output Noise



■ ORDERING INFORMATION

Order Number		PIN CODE								Package	Packing
Normal	Lead Free Plating	1	2	3	4	5	6	7	8		
TL432C-AB3-R	TL432CL-AB3-R	R	A	K	-	-	-	-	-	SOT-89	Tape Reel
TL432C-AE3-R	TL432CL-AE3-R	K	R	A	-	-	-	-	-	SOT-23	Tape Reel
TL432C-AF5-R	TL432CL-AF5-R	X	X	K	R	A	-	-	-	SOT-25	Tape Reel
TL432C-T92-B	TL432CL-T92-B	R	A	K	-	-	-	-	-	TO-92	Tape Box
TL432C-T92-K	TL432CL-T92-K	R	A	K	-	-	-	-	-	TO-92	Bulk
TL432C-S08-R	TL432CL-S08-R	K	A	A	X	X	A	A	R	SOP-8	Tape Reel
TL432C-S08-T	TL432CL-S08-T	K	A	A	X	X	A	A	R	SOP-8	Tube


Note: Pin Code: C: Cathode A: Anode R: Reference X: No Connection

<p>TL432CL-AB3-R</p>	<p>(1) B: Tape Box, K: Bulk, R: Tape Reel, T: Tube</p> <p>(2) AB3: SOT-89, AE3: SOT-23, AF3: SOT-25, S08: SOP-8, T92: TO-92</p> <p>(3) L: Lead Free Plating Blank: Pb/Sn</p>
----------------------	--

MARKING INFORMATION

PACKAGE	MARKING
SOT-23	
SOT-25	

BLOCK DIAGRAM

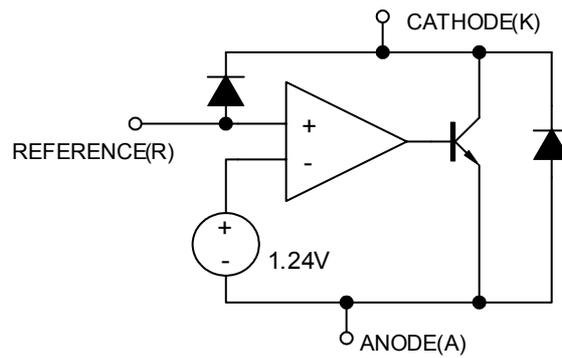

■ ABSOLUTE MAXIMUM RATINGS

PARAMETER	SYMBOL	RATINGS	UNIT
Cathode-Anode Reverse Breakdown	V_{KA}	15	V
Anode-Cathode Forward Current	I_{AK}	1	A
Operating Cathode Current	I_{KA}	50	mA
Reference Input Current	I_{REF}	1	mA
Junction Temperature	T_J	125	°C
Operating Temperature	T_{OPR}	0 ~ +70	°C
Storage Temperature	T_{STG}	-40 ~ +150	°C

Note 1. Absolute maximum ratings are those values beyond which the device could be permanently damaged.

Absolute maximum ratings are stress ratings only and functional device operation is not implied.

2. The device is guaranteed to meet performance specification within 0 ~ 70 operating temperature range and assured by design from -20 ~ 85 .

■ RECOMMENDED OPERATING CONDITIONS

PARAMETER	SYMBOL	MIN	TYP	MAX	UNIT
Cathode Voltage	V_{KA}	V_{REF}		15	V
Cathode Current	I_K	5	10		mA

■ TYPICAL THERMAL DATA

PARAMETER	SYMBOL	PACKAGE	RATING	UNIT
Thermal Resistance Junction to Ambient	θ_{JA}	TO-92	100	°C/W
		SOP-8	150	
		SOT-89	220	
		SOT-23	350	
		SOT-25	350	

■ ELECTRICAL CHARACTERISTICS ($T_J=25^\circ\text{C}$, $V_{KA}=V_{REF}$, $I_K=10\text{mA}$, unless otherwise specified.)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Reference Input Voltage	V_{REF}	$I_K=10\text{mA}$, $V_K=V_{REF}$	1.228	1.240	1.252	V
			1.215	1.240	1.265	V
Line Regulation	ΔV_{REF}	$V_K=1.24 \sim 15\text{V}$		10	15	mV
Load Regulation	ΔV_{REF}	$I_K=5 \sim 50\text{mA}$		6	15	mV
Temperature Deviation	ΔV_{REF}	$0 < T_J < 105^\circ\text{C}$		2	6	mV
Reference Input Current	I_{REF}			3	6	μA
Reference Input Current Temperature Coefficient	ΔI_{REF}	$0 < T_J < 105^\circ\text{C}$		0.3	0.6	μA
Minimum Cathode Current for Regulation	$I_{K(MIN)}$			0.6	1	mA
Off State Leakage	$I_{KA(OFF)}$	$V_{REF}=0\text{V}$, $V_{KA}=15\text{V}$			500	nA

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.