


## Programmable Media Processor

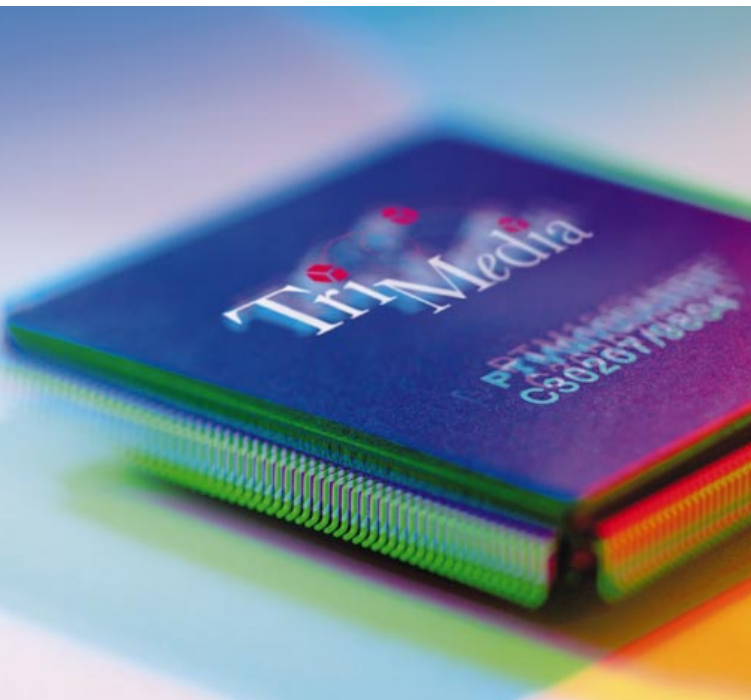

# TriMedia™ TM-1100

On a single chip, a TriMedia™ TM-1100 delivers real-time processing of audio, video, graphics, and communications datastreams. With its low-cost 133-MHz CPU and a full complement of on-chip I/O and coprocessing peripheral units, the TM-1100 media processor delivers up to 5.3 BOPS to new multimedia products. 100% pin compatibility with the TM-1000 processor ensures that developers can take immediate advantage of up to 33% more processing power in their existing TM-1000 designs.

Comparable in programmability to a general-purpose processor, the TriMedia TM-1100 architecture enables development of multimedia applications entirely in the C and C++ programming languages. Programmability improves time-to-market, lowers development costs, and extends product life through software upgradability.

### FEATURES

- + Processes audio, video, graphics and communications datastreams on a single chip
- + Powerful, fine-grain parallel, 133-MHz VLIW CPU with versatile instruction set includes special multimedia and DSP operations
- + Pin compatibility with TM-1000 delivers up to 33% more performance to TriMedia TM-1000 designs
- + Multiple, independent, DMA-driven multimedia I/O and coprocessing units format data and offload the CPU
- + Enhanced video out functionality includes 7-bit alpha blending, full chroma keying, genlock capability, and programmable YUV color clipping
- + PCI/XIO bus interface supports glueless interface to a mix of PCI and 8-bit microcomputer peripheral chips, such as ROM/Flash, EEPROM, 68K, and x86 devices
- + Robust software development tools enable multimedia application development entirely in C/C++
- + DVD playback authentication/descrambling functions for PC and standalone applications
- + 16- and 64-Mbit SDRAM support up to 133-MHz

### MULTIMEDIA APPLICATIONS

The TM-1100 is an ideal building block for any multimedia application that processes multiple multimedia and communications datastreams. It is well suited for creating a range of consumer and professional products such as videophones, videoconferencing and video editing systems, security systems, DVD encode/decode devices, and digital television appliances.

### SINGLE-CHIP MULTIMEDIA ENGINE

Powered by a low-cost, 133-MHz, C-programmable CPU, the TriMedia TM-1100 strikes a perfect compromise between cost and performance. To streamline data throughput, TM-1100 incorporates independent on-chip DMA-driven peripheral units that manage datastream I/O and formatting and accelerate processing of key multimedia algorithms. To reap the full benefit of the CPU and processing units, TM-1100's sophisticated memory hierarchy manages internal I/O and streamlines access to external memory. The result — a single, low-cost programmable chip that powers standalone and PC-hosted multimedia products.


*Let's make things better.*



**PHILIPS**

# A single-chip multimedia engine

Powered by a low-cost, 133-MHz, C-programmable CPU, the TriMedia TM-1100 strikes a perfect compromise between cost and performance.

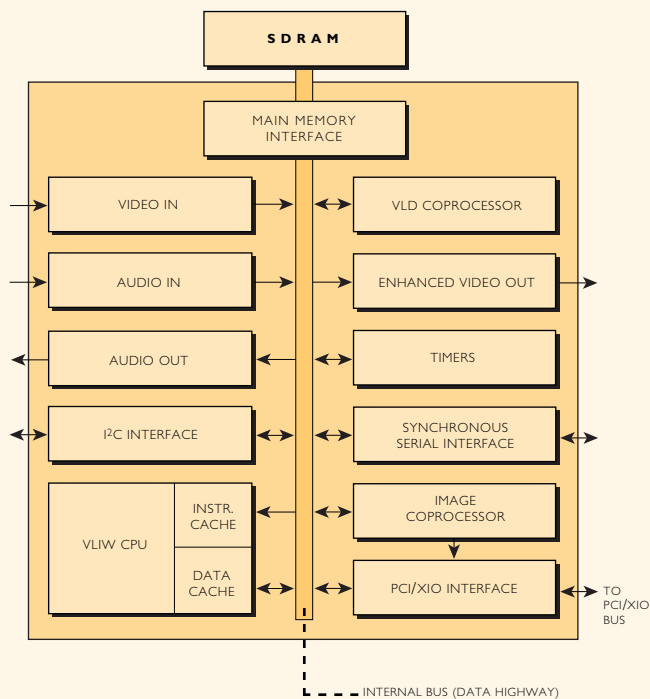

## TM-1100 ARCHITECTURE

On a single chip, the TM-1100 incorporates a powerful CPU and peripherals to accelerate processing of audio, video, graphics, and communications data.

## PROGRAMMABLE VLIW CPU

The TM-1100 delivers top performance through an elegant implementation of a very-long instruction word (VLIW) architecture. Key to the TriMedia processor's VLIW implementation, parallelism is optimized at compile time by the TriMedia compilation system. No specialized scheduling hardware is required to parallelize code during execution. Hardware saved by eliminating complex scheduling logic reduces cost and allows the integration of multimedia features that enhance the power of the CPU in multimedia applications.

The TM-1100 processor's powerful DSP-like, 32-bit CPU achieves fine-grain parallelism by simultaneously targeting five of its 27 pipelined functional units within one clock cycle. Most common operations have their results available in one clock cycle; more complex operations have multiclock latencies.

Functional units can access 128 fully general-purpose, 32-bit registers during execution. Since registers are not separated into banks, any operation can use any register for any operand. Both big and little endian byte ordering are supported.

The TriMedia TM-1100 CPU also provides special support for instruction and data breakpoints, useful in debugging and program development.

## POWERFUL, DSP-LIKE, C-CALLABLE MULTIMEDIA OPS

In addition to traditional microprocessor operations and a full complement of 32-bit, IEEE-compliant, floating point operations, the TM-1100 instruction set includes multimedia and DSP operations that accelerate the performance of multimedia applications. Such multimedia operations can replace up to 11 traditional microprocessor operations. When incorporated into application source code, they dramatically improve performance and amplify the efficiency of the TM-1100's parallel architecture.

Multimedia operations are invoked with familiar function-call syntax consistent with the C programming language. They are automatically scheduled to take full advantage of the TriMedia processor's highly parallel VLIW implementation. As with all other operations generated by the TriMedia VLIW compilation system, the scheduler takes care of register allocation, operation packing, and flow analysis.

The TM-1100 processor enhances the multimedia operation set available for the TM-1000 with 6 additional operations that improve efficiency of MPEG-2 9-bit precise decoding, support video de-interlacing (median filtering), and more.

## MEMORY SYSTEM OVERVIEW

To reap the full benefit of the TM-1100 processor's CPU and processing units, its memory hierarchy must read and write data (and instructions) fast enough to keep these units busy. Thus to meet the

# TM-1100 Specifications

## PHYSICAL

<b>Process</b>	C75: CMOS 0.35 micron; 5-layer metal
<b>Packaging</b>	TE_QFP
<b>Pins</b>	<b>total</b> 240
	<b>I/O pins</b> 3.3 V with 5 V tolerance
<b>Power</b>	<b>supply</b> 3.3 V +/- 5%
	<b>dissipation</b> 6W (max)
	<b>consumption</b> 1808 mA 5.97 W
	<b>management</b> dynamic standby less than 990 mW

## CENTRAL PROCESSING UNIT

<b>Clock Speed</b>	133 MHz																																																
<b>Instruction Length</b>	variable (2 to 23 bytes); compressed																																																
<b>Instruction Set</b>	arithmetic and logical ops, load/store ops., special multimedia and DSP ops., IEEE-compliant floating point ops.																																																
<b>Issue Slots</b>	5																																																
<b>Functional Units</b>	27, pipelined																																																
	integer and floating-point arithmetic units, data-parallel DSP-like units																																																
	<table><thead><tr><th><i>name</i></th><th><i>quantity</i></th><th><i>latency</i></th><th><i>recovery</i></th></tr></thead><tbody><tr><td>constant</td><td>5</td><td>1</td><td>1</td></tr><tr><td>integer ALU</td><td>5</td><td>1</td><td>1</td></tr><tr><td>memory load/store</td><td>2</td><td>3</td><td>1</td></tr><tr><td>shift</td><td>2</td><td>1</td><td>1</td></tr><tr><td>DSPALU</td><td>2</td><td>2</td><td>1</td></tr><tr><td>DSP multiply</td><td>2</td><td>3</td><td>1</td></tr><tr><td>branch</td><td>3</td><td>3</td><td>1</td></tr><tr><td>float ALU</td><td>2</td><td>3</td><td>1</td></tr><tr><td>integer/float mul</td><td>2</td><td>3</td><td>1</td></tr><tr><td>float compare</td><td>1</td><td>1</td><td>1</td></tr><tr><td>float sqrt./divide</td><td>1</td><td>17</td><td>16</td></tr></tbody></table>	<i>name</i>	<i>quantity</i>	<i>latency</i>	<i>recovery</i>	constant	5	1	1	integer ALU	5	1	1	memory load/store	2	3	1	shift	2	1	1	DSPALU	2	2	1	DSP multiply	2	3	1	branch	3	3	1	float ALU	2	3	1	integer/float mul	2	3	1	float compare	1	1	1	float sqrt./divide	1	17	16
<i>name</i>	<i>quantity</i>	<i>latency</i>	<i>recovery</i>																																														
constant	5	1	1																																														
integer ALU	5	1	1																																														
memory load/store	2	3	1																																														
shift	2	1	1																																														
DSPALU	2	2	1																																														
DSP multiply	2	3	1																																														
branch	3	3	1																																														
float ALU	2	3	1																																														
integer/float mul	2	3	1																																														
float compare	1	1	1																																														
float sqrt./divide	1	17	16																																														
<b>Registers</b>	128 (32-bit width)																																																
<b>Special Multimedia/DSP Operations</b>	<b>total</b> 32 ops																																																

## MEMORY SYSTEM

<b>Speed</b>	66/80/100/133 MHz
<b>CPU/Memory Speed Ratios</b>	programmable; 1:1, 5:4, 4:3, 3:2, and 2:1
<b>Memory Size</b>	512 KB to 64 MB (up to four ranks)
<b>Supported Types</b>	16-Mbit SDRAM (x4, x8, x16); SGRAM (x32); 64-Mbit SDRAM (x32)
<b>Width</b>	32-bit bus
<b>Max. Bandwidth</b>	532 MB/sec (at 133 MHz)
<b>Interface</b>	glueless up to 4 16-Mbit or 2 64-Mbit chips at 133 MHz; more chips with slower clock and/or external buffers
<b>Signal Levels</b>	3.3 V LVTTTL

## CACHES

<b>Access</b>	<b>data</b> 8-, 16-, 32-bit word
	<b>instruction</b> 64 bytes
<b>Associativity</b>	8-way set-associative with LRU replacement
<b>Block Size</b>	64 bytes
<b>Size</b>	<b>data</b> 16 KB
	<b>instruction</b> 32 KB

## INTERNAL DATA HIGHWAY

<b>Protocol</b>	64-byte block-transfer separate 32-bit data and 32-bit address buses
-----------------	--

## PCI INTERFACE

<b>Speed</b>	33 MHz
<b>Bus Width</b>	32-bit
<b>Address Space</b>	32 bits (4 GB)
<b>Voltage</b>	drive and receive at 3.3V or 5V
<b>Standard Compliance</b>	PCI Local Bus Specification 2.1

## VIDEO IN

<b>Supported Signals</b>	CCIR 601/656 8-bit video up to 19 Mpix/sec raw 8-10-bit data (messages) up to 38 MB/sec
<b>Image Sizes</b>	all sizes, subject to sample rate
<b>Functions</b>	programmable on-the-fly 2X horizontal resolution subsampling

## ENHANCED VIDEO OUT

<b>Image Sizes</b>	flexible, including CCIR601; maximum 4K x 4K pixels (subject to 80 MB/sec data rate)
<b>Input Formats</b>	YUV 4:2:2, YUV 4:2:0
<b>Output Formats</b>	CCIR601/656 8-bit video, PAL or NTSC
<b>Clock Rates</b>	programmable (4-80 MHz), typically 27 MB/sec (13.5 Mpixels/sec for NTSC, PAL)
<b>Transfer Speeds</b>	80 MB/sec in data-streaming and message-passing modes; 40 Mpix/sec in YUV 4:2:2 mode
<b>Functions</b>	full 129-level alpha blending, genlock mode, frame synchronization, chroma key, programmable YUV color clipping

## AUDIO IN / AUDIO OUT

<b>Number of Channels</b>	2 input; 8 output
<b>Sample Size</b>	8- or 16-bit samples per channel
<b>Sample Rates</b>	1 Hz to 100 KHz programmable with 0.001 Hz resolution
<b>Data Formats</b>	8-bit mono and stereo; 16-bit mono and stereo PC standard memory data format
<b>External Interface</b>	4 pins each: 1 programmable clock output, 3 flexible serial input (AI) or output (AO) interface
<b>Clock Source</b>	internal or external
<b>Native Protocol</b>	I <sup>2</sup> S and other serial 3-wire protocols

# Multimedia application development entirely in C and C++

By enabling development of multimedia applications entirely in the C and C++ programming languages, the SDE dramatically lowers development costs, reduces time-to-market, and ensures code portability to next generation architecture.



## **ROBUST SOFTWARE DEVELOPMENT ENVIRONMENT**

The TriMedia software development environment (SDE) includes a full suite of system software tools to compile and debug code, analyze and optimize performance, and simulate execution for the TM-1100 processor. By enabling development of multimedia applications entirely in the C and C++ programming languages, the SDE dramatically lowers development costs, reduces time-to-market, and ensures code portability to next generation architecture.

## **TRIMEDIA REAL-TIME OPERATING SYSTEM KERNELS**

For multimedia applications requiring system resource and task management, the TM-1100 media processor supports the pSOS+™ embedded real-time operating system kernels. Developed by Integrated Systems, Inc. (ISI), the pSOS+ kernels are optimized to deliver the deterministic response essential for multimedia applications.

internal I/O requirements of its target applications, the TM-1100 couples substantial on-chip caches with a glueless memory interface.

**Dedicated instruction and data cache** — TM-1100's CPU is supported by separate, dedicated on-chip data and instruction caches. Even without a second-level cache structure, TriMedia caches deliver media performance an order of magnitude greater than x86 processors.


The dual-ported data cache allows two simultaneous accesses. It is non-blocking, thus cache misses and CPU cache accesses can be handled simultaneously. Early restart techniques reduce read-miss latency. Background copyback reduces CPU stalls.

To reduce internal bus bandwidth requirements, instructions in main memory and cache use a compressed format. The compressed instruction format improves the cache hit rate and reduces bus bandwidth. Instructions are compressed during compilation and decompressed in the instruction cache before being processed by the CPU.


To improve cache behavior and thus performance, both caches have a locking mechanism. Cache coherency is maintained by software.

**Glueless memory system interface** — TM-1100's glueless main memory interface couples the on-chip caches and multimedia peripheral units to main memory (SDRAM). It acts as the SDRAM controller and programmable central arbiter that allocates SDRAM memory bandwidth for on-chip peripheral unit activities. Higher

#### HOST-ASSISTED COPROCESSOR

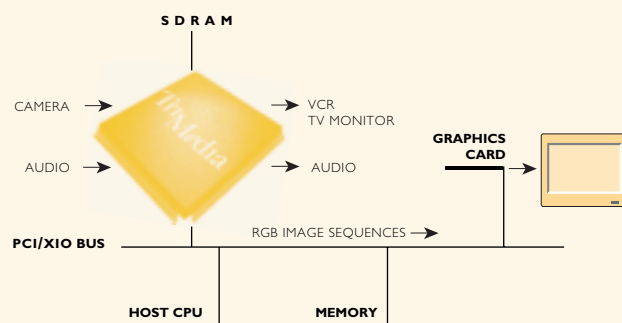


#### STANDALONE

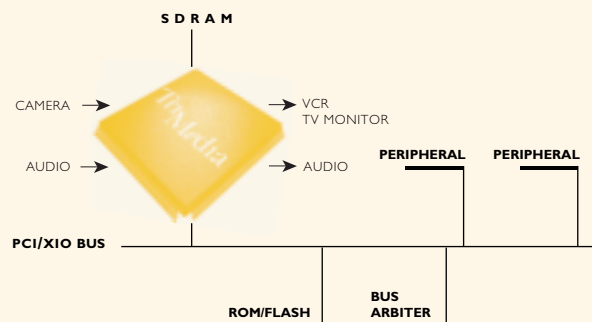

TM-1100 is designed for use as a coprocessor in a PC-hosted environment or as the sole CPU in standalone systems.

**UMEBUU: SUM OF ABSOLUTE VALUES OF UNSIGNED 8-BIT DIFFERENCES**

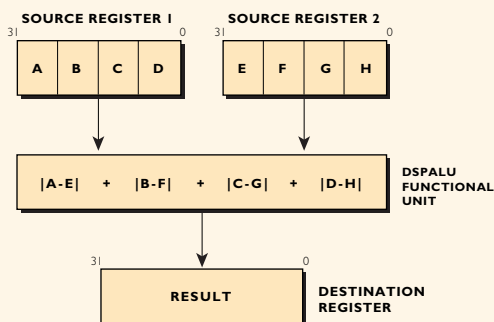

#### SPECIAL MULTIMEDIA OPERATIONS

The *ume8uu* operation, commonly used for motion estimation in video compression, implements 11 simple operations in one TriMedia special op.

bandwidth SDRAM permits TM-1100 to use a narrower and simpler interface than would be required to achieve similar performance with standard DRAM.


The TM-1100 memory interface provides sufficient capacity to drive a memory system consisting of up to 133-MHz, 8-MB (four 2Mx8) or 16-MB (two 2Mx32) SDRAMs. Larger memories can be implemented by using lower memory system clock frequencies or external buffers. Programmable speed ratios allow SDRAM to have a different clock speed than the TM-1100 CPU. Support for a variety of memory types, speeds, bus widths, and off-chip bank sizes allow a range of TM-1100-based systems to be configured.

#### HIGH-SPEED INTERNAL BUS (DATA HIGHWAY)

The memory system interface also mediates bandwidth allocation of the TM-1100's on-chip central data highway. A high-speed internal bus consisting of separate 32-bit address and data buses, the data highway connects the CPU and all on-chip I/O and coprocessing units to external SDRAM (through the memory interface) and to an off-chip PCI or XIO bus (through the PCI/XIO interface). Programmable bandwidth enables the data highway to deliver real-time responsiveness in a variety of multimedia applications.

# On-chip multimedia I/O & coprocessing units

To streamline data throughput, TM-1100's independent DMA-driven peripheral units manage I/O, format video, audio, graphics, and communications datastreams, and perform operations specific to key multimedia algorithms.

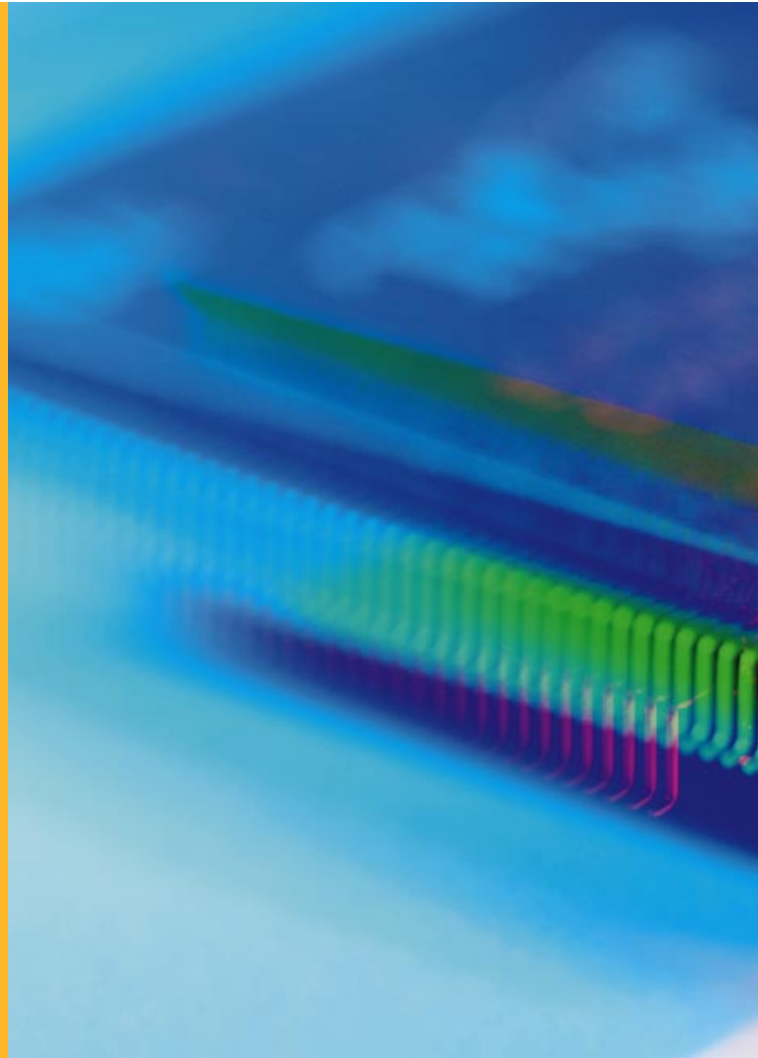

## MULTIMEDIA I/O AND COPROCESSING UNITS

**Video input** — The video input (VI) unit reads digital video datastreams from an off-chip source into main memory. The VI unit accepts input from CCIR656-compliant devices that output 8-bit parallel, 4:2:2 YUV time-multiplexed video data, such as digital video cameras, digital video decoders, or devices connected through ECL-level converters to the standard D1 parallel interface. After input, YUV data is demultiplexed, subsampled as needed, and written to SDRAM.

The VI unit can be programmed to perform on-the-fly 2X horizontal resolution subsampling. This enables high-resolution images (640- or 720-pixels/line) to be captured and converted to 320- or 360-pixels/line without burdening the CPU. When lower resolution video is eventually desirable, performing subsampling during data capture reduces initial storage and bus bandwidth requirements. The VI unit can receive raw data and unidirectional messages from another TM-1100's video out port.

**Enhanced video output** — The enhanced video out (EVO) unit outputs a digital YUV datastream to off-chip video subsystems such as a digital video encoder chip, digital video recorder, or other CCIR656-compatible device. The output signal is generated by gathering bits from the separate Y, U, and V data structures in SDRAM.

The EVO unit can either supply or receive video clock and/or synchronizing signals from the external interface. Clock and timing

registers can be precisely controlled through programmable registers. Programmable interrupts and dual buffers facilitate continuous data streaming by allowing the CPU to set up a buffer while another is being emptied by the EVO unit.

While generating the multiplexed stream, the EVO unit can perform programmed tasks, including optional horizontal 2X upscaling to convert from CIF/SIF to CCIR 601 resolution. For simultaneous display of graphics and live video, the EVO unit can perform 129-level alpha blending to generate sophisticated graphics overlays of arbitrary size and position within the output image. Chroma keying, genlock frame synchronization, and programmable YUV output clipping are also supported. The EVO unit can also pass raw data and unidirectional messages to another TriMedia processor.

**Audio input and audio output** — Together the audio input (AI) and audio output (AO) units provide all signals needed to interface to most high-quality, low-cost serial audio D/A and A/D converters. Both audio units are highly programmable, providing tremendous flexibility in developing custom datastream handling, adapting to custom protocols, and upgrading to support future audio standards.

The audio peripheral units connect to off-chip stereo converters through flexible bit-serial interfaces. The AI unit supports one or two channels of audio input; the AO unit delivers up to eight channels of



output. Eight-bit mono and stereo and 16-bit mono and stereo PC standard memory data formats are supported. The AO unit can be used to control highly integrated PC codecs.

Driven by TM-1100, the programmable audio sampling clock supports rates from 1 Hz to 100 KHz. High resolution of .001 Hz gives programmers subtle control over sampling frequency enabling audio and video synchronization in even the most complex configurations.

**Image coprocessor** — The image coprocessor (ICP) offloads the TriMedia CPU of several image processing and manipulation tasks such as copying an image from SDRAM to a host's video frame buffer. The ICP can operate as either a memory-to-memory or a memory-to-PCI coprocessor device. In memory-to-memory mode, the ICP can perform horizontal or vertical image filtering and scaling. In memory-to-PCI modes, it can perform horizontal scaling and filtering followed by YUV to RGB color-space conversion for screen display.

The ICP also provides display support for live video in overlapping windows. The number and sizes of windows processed are limited only by available bandwidth. The final resampled and converted image pixels are transmitted over the PCI/XIO bus to an optional off-chip graphics card/frame buffer.

**Variable length decoder** — TM-1100's variable length decoder (VLD) unit offloads the CPU of decoding Huffman-encoded video

datastreams such as MPEG-1 and MPEG-2. It reads video streams from SDRAM and outputs a decoded stream optimized for MPEG-2 decompression software. This minimizes communications with the CPU where other portions of MPEG processing are performed.

**DVD descrambler** — The TM-1100 processor's digital versatile disc descrambler unit provides DVD authentication and descrambling functions internally. These features enable developers to add low-cost, flexible DVD-video playback functions in PC and standalone applications with a minimum of effort.

**I<sup>2</sup>C interface** — TM-1100's I<sup>2</sup>C interface unit provides an external I<sup>2</sup>C or compatible interface for use in hardware or software mode. In hardware mode, it can be used to connect and control a variety of I<sup>2</sup>C multimedia devices. This allows TM-1100 to configure and inspect status of peripheral video devices such as digital decoders and encoders, digital cameras, parallel I/O expanders and more.

I<sup>2</sup>C software operation mode enables full control of the I<sup>2</sup>C interface through software. The I<sup>2</sup>C interface is also used to read the boot program from an off-chip EEPROM.

**Synchronous serial interface** — TM-1100's synchronous serial interface (SSI) unit provides serial access for a variety of multimedia applications, such as video phones or videoconferencing, and for general data communications in PC-based systems. The SSI unit contains all the buffers and logic necessary to interface with simple analog modem front ends. When used with the TriMedia V.34 software library, the SSI unit provides fully V.34-compliant modem capability. Alternatively, it can be connected to an ISDN interface chip to provide advanced digital modem capabilities.

**Timers** — The TM-1100 provides four general purpose timers useful for counting/timing events such as CPU clock cycles, data/instruction breakpoints, cache tracing, audio/video clocks, and more. Three timers are available to programmers, the fourth is reserved for system software. Each timer has a value that can be continuously inspected as needed for an application and an associated modulus that can be used to generate an interrupt when the timer's value reaches the modulus.

**High-speed PCI/XIO bus interface** — TM-1100's PCI/XIO interface unit connects the CPU and on-chip I/O and coprocessing units to a PCI/XIO bus. In embedded applications where TM-1100 is the main processor, this interface enables the TM-1100 to access off-chip devices that implement functions not provided by on-chip peripherals. In PC-based applications, the PCI/XIO interface connects TM-1100 to a standard PCI bus, allowing it to be placed directly on the PC mainboard or on a plug-in card. For low-cost standalone systems, XIO allows glueless connection of 8-bit x86 or 68K peripheral devices such as ROM, Flash, EEPROM, UARTs, etc.

## TM-1100 Specifications

### IMAGE COPROCESSOR

<b>Functions</b>	horizontal or vertical scaling and filtering of individual Y, U, or V horizontal scaling and filtering with color conversion and overlay: <ul style="list-style-type: none"><li>- YUV to RGB</li><li>- RGB overlay and alpha blending</li><li>- bit mask blanking</li></ul>
<b>Scaling</b>	programmable scale factor (0.2X to 10X)
<b>Filtering</b>	32-polyphase, each instance 5-tap, fully programmable filter coefficients
<b>Performance</b>	horizontal scaling and filtering: 80 MB/sec vertical scaling and filtering: 30 MB/sec horizontal scaling and filtering with color conversion: 33 Mpixels/sec peak for RGB output; 50 Mpixels/sec peak for YUV 4:2:2 output

### VLD

<b>Function</b>	parses MPEG-1 and MPEG-2 elementary bitstreams generating run-level pairs and filling in macroblock header
<b>External Interface</b>	none

### DVD DESCRAMBLER

<b>Functions</b>	authentication; descrambling
<b>External Interface</b>	none

### PC INTERFACE

<b>Supported Modes</b>	single master only
<b>Addressing</b>	7- and 10-bit
<b>Rates</b>	up to 400 kbps
<b>External Interface</b>	2 pins: 1 serial data, 1 clock

### SYNCHRONOUS SERIAL INTERFACE

<b>Data Formats</b>	variable slots/frame
<b>Frame Sync</b>	external or internal
<b>Clock Source</b>	separate transmit, receive, frame sync transmit/receive clocks external source automatic frame sync error detection settable edge polarity for transmit, receive, and frame sync
<b>External Interface</b>	6 pins (2 can be used for tip and ring for phone connections); compatible with a majority of telecom devices can be configured with multiple chips

### TIMERS

<b>Number</b>	4
<b>Width</b>	32-bits
<b>Sources</b>	external clock, (prescaled) CPU clock, data or instruction breakpoints, cache events, video in/out clocks, audio in/out word strobe, V.34 receive/transmit frame sync

### FOR MORE INFORMATION CONTACT:

**PHILIPS SEMICONDUCTORS TRIMEDIA BUSINESS LINE**

**811 EAST ARQUES AVENUE M/S 71, SUNNYVALE CA 94088-3409**

**PH 800-914-9239 (NORTH AMERICA), 408-991-3838 (WORLDWIDE)**

**FX 408-991-3300, E-MAIL [info@trimedia.sv.sc.philips.com](mailto:info@trimedia.sv.sc.philips.com)**

**WEBSITE [www.trimedia.philips.com](http://www.trimedia.philips.com)**

## Philips Semiconductors - a worldwide company

**Argentina:** see South America  
**Australia:** Tel. +61 2 9805 4455 Fax. +61 2 9805 4466  
**Austria:** Tel. +43 1 60 1010, Fax. +43 1 60 101 1210  
**Belarus:** Tel. +375 172 200 733, Fax. +375 172 200 773  
**Belgium:** see The Netherlands  
**Brazil:** see South America  
**Bulgaria:** Tel. +359 2 689 211, Fax. +359 2 689 102  
**Canada:** Tel. +1 800 234 7381  
**China/Hong Kong:** Tel. +852 2319 7888, Fax. +852 2319 7700  
**Colombia:** see South America  
**Czech Republic:** see Austria  
**Denmark:** Tel. +45 32 88 2636, Fax. +45 31 57 0044  
**Finland:** Tel. +358 9 615800, Fax. +358 9 61580920  
**France:** Tel. +33 1 40 99 6161, Fax. +33 1 40 99 6427  
**Germany:** Tel. +49 40 23 53 60, Fax. +49 40 23 536 300  
**Greece:** Tel. +30 1 4894 339/239, Fax. +30 1 4814 240  
**Hungary:** see Austria  
**India:** Tel. +91 22 493 8541, Fax. +91 22 493 0966  
**Indonesia:** see Singapore  
**Ireland:** Tel. +353 1 7640 000, Fax. +353 1 7640 200  
**Israel:** Tel. +972 3 645 0444, Fax. +972 3 649 1007  
**Italy:** Tel. +39 2 6752 2531, Fax. +39 2 6752 2557  
**Japan:** Tel. +81 3 3740 5130, Fax. +81 3 3740 5077  
**Korea:** Tel. +82 2 709 1412, Fax. +82 2 709 1415  
**Malaysia:** Tel. +60 3 750 5214, Fax. +60 3 757 4880  
**Mexico:** Tel. +9-5 800 234 7381  
**Middle East:** see Italy  
**Netherlands:** Tel. +31 40 27 82785, Fax. +31 40 27 88399  
**New Zealand:** Tel. +64 9 849 4160, Fax. +64 9 849 7811  
**Norway:** Tel. +47 22 74 8000, Fax. +47 22 74 8341  
**Philippines:** Tel. +63 2 816 6380, Fax. +63 2 817 3474  
**Poland:** Tel. +48 22 612 2831, Fax. +48 22 612 2327  
**Portugal:** see Spain  
**Romania:** see Italy  
**Russia:** Tel. +7 095 755 6918, Fax. +7 095 755 6919  
**Singapore:** Tel. +65 350 2538, Fax. +65 251 6500  
**Slovakia:** see Austria  
**Slovenia:** see Italy  
**South Africa:** Tel. +27 11 470 5911, Fax. +27 11 470 5494  
**South America:** Tel. +55 11 821 2333, Fax. +55 11 821 2382  
**Spain:** Tel. +34 3 301 6312, Fax. +34 3 301 4107  
**Sweden:** Tel. +46 8 632 2000, Fax. +46 8 632 2745  
**Switzerland:** Tel. +41 1 488 2686, Fax. +41 1 488 3263  
**Taiwan:** Tel. +886 2 2134 2865, Fax. +886 2 2134 2874  
**Thailand:** Tel. +66 2 745 4090, Fax. +66 2 398 0793  
**Turkey:** Tel. +90 212 279 2770, Fax. +90 212 282 6707  
**Ukraine:** Tel. +380 44 264 2776, Fax. +380 44 268 0461  
**United Kingdom:** Tel. +44 181 730 5000, Fax. +44 181 754 8421  
**United States:** Tel. +1 800 234 7381  
**Uruguay:** see South America  
**Vietnam:** see Singapore  
**Yugoslavia:** Tel. +381 11 625 344, Fax. +381 11 635 777

**For all other countries apply to:** Philips Semiconductors, International Marketing & Sales Communications, Building BE-p, P.O. Box 218, 5600 MD EINDHOVEN, The Netherlands, Fax. +31 40 27 24825

**Internet:** <http://www.semiconductors.philips.com>

© 1998 Philips Electronics North America Corporation. All rights are reserved. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner.

TriMedia and the TriMedia design are trademarks of Philips Electronics North America Corporation. pSOS, pSOS+, and pSOS+m are trademarks of Integrated systems, Inc. Other brands and products are trademarks or registered trademarks of their respective owners.

The information presented in this document does not form part of any quotation of contract, is believed to be accurate and reliable and may be changed without notice. No liability will be accepted by the publisher for any consequences of its use. Publication thereof does not convey or imply any license under patent or other industrial or intellectual property rights.

Printed in The Netherlands. Date of release: September 1998  
Pub. No.: 9397-750-03177

*Let's make things better.*



**PHILIPS**