



TS13007

High Voltage NPN Transistor

TO-220



Pin assignment:
 1. Base
 2. Collector
 3. Emitter

B_V_{CEO} = 400V
B_V_{CBO} = 700V
I_c = 8A
V_{CE(SAT)} = 3V @ I_c / I_b = 8A / 2A

Features

- ◆ Suitable for switching regulator and motor control
- ◆ High speed switching

Structure

- ◆ Silicon triple diffused type.

Ordering Information

Part No.	Packing	Package
TS13007CZ	Tube	TO-220

Absolute Maximum Rating (Ta = 25 °C unless otherwise noted)


Parameter	Symbol	Limit	Unit
Collector-Base Voltage	V _{CBO}	700V	V
Collector-Emitter Voltage	V _{CEO}	400V	V
Emitter-Base Voltage	V _{EBO}	9	V
Collector Current	I _c DC	8	A
	I _c Pulse	16	
Base Current	I _B	4	A
Collector Power Dissipation	T _c =25 °C	P _D	W
Operating Junction Temperature	T _J	+150	°C
Operating Junction and Storage Temperature Range	T _{STG}	- 65 to +150	°C

Electrical Characteristics (Ta = 25 °C unless otherwise noted)

Parameter	Conditions	Symbol	Min	Typ	Max	Unit
Static						
Collector-Base Voltage	I _C = 10mA, I _B = 0	BV _{CBO}	700	--	--	V
Collector-Emitter Breakdown Voltage	I _C = 10mA, I _E = 0	BV _{CEO}	400	--	--	V
Emitter-Base Breakdown Voltage	I _E = 1mA, I _C = 0	BV _{EBO}	9	--	--	V
Emitter Cutoff Current	V _{EB} = 9V, I _C = 0	I _{EBO}	--	--	1	mA
Collector-Emitter Saturation Voltage	I _C / I _B = 2A / 0.4A	V _{CE(SAT)1}	--	--	1	
	I _C / I _B = 5A / 1A	V _{CE(SAT)2}	--	--	2	
	I _C / I _B = 8A / 2A	V _{CE(SAT)3}	--	--	3	
Base-Emitter Saturation Voltage	I _C / I _B = 2A / 0.4A	V _{BE(SAT)1}	--	--	1.2	
	I _C / I _B = 5A / 1A	V _{BE(SAT)2}	--	--	1.6	
DC Current Gain	V _{CE} = 5V, I _C = 2A	h _{FE} 1	8	--	60	
	V _{CE} = 5V, I _C = 5A	h _{FE} 2	5	--	30	
Frequency	V _{CE} = 10V, I _C = 0.5A	f _T	4	--	--	MHz
Output Capacitance	V _{CB} = 10V, f = 0.1MHz	C _{ob}	--	110	--	pF
Turn On Time	V _{CC} = 125V, I _C = 5A, I _{B1} = 1A, I _{B2} = - 1A, R _L = 50ohm	t _{ON}	--	--	1.6	uS
Storage Time		t _{STG}	--	--	3	uS
Fall Time		t _f	--	--	0.7	uS

Note : pulse test: pulse width <=300uS, duty cycle <=2%

TO-220 Mechanical Drawing

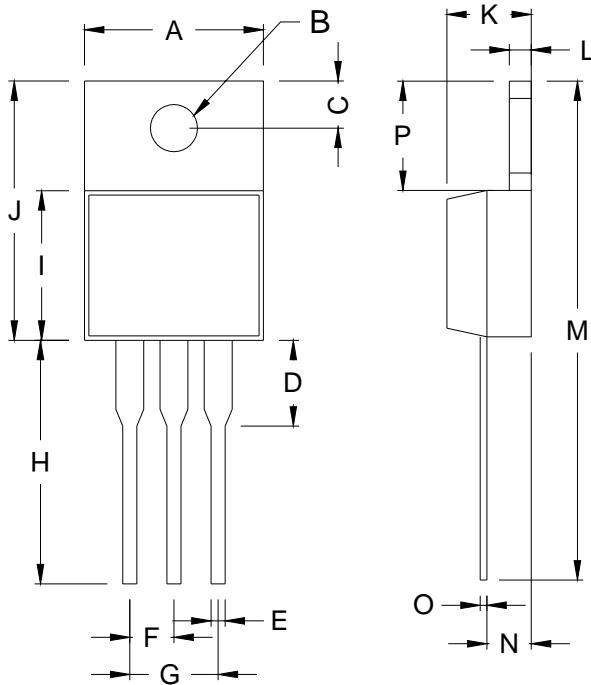

DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	10.000	10.500	0.394	0.413
B	3.240	4.440	0.128	0.175
C	2.440	2.940	0.096	0.116
D	-	6.350	-	0.250
E	0.381	1.106	0.015	0.040
F	2.345	2.715	0.092	0.058
G	4.690	5.430	0.092	0.107
H	12.700	14.732	0.500	0.581
I	8.382	9.017	0.330	0.355
J	14.224	16.510	0.560	0.650
K	3.556	4.826	0.140	0.190
L	0.508	1.397	0.020	0.055
M	27.700	29.620	1.060	1.230
N	2.032	2.921	0.080	0.115
O	0.255	0.610	0.010	0.024
P	5.842	6.858	0.230	0.270