



TSC114A

NPN Digital Transistor

SOT-23



SOT-323



- Pin assignment:
1. Input (Base)
 2. Gnd (Emitter)
 3. Output (Collector)

V_{cc} = 50V
V_{in} = - 10V ~ +40V
I_o = 100mA(max.)

Features

- ◇ Build-in bias resistor enable the configuration of an inverter circuit without connecting external input resistors (see equivalent circuit)
- ◇ The bias resistors consist of thin-film resistors with complete isolation to allow negative biasing of the input. They also have the advantage of almost completely eliminating parasitic effects.
- ◇ Only the on/off conditions need to be set for operation, making device design easy.
- ◇ Complements the TSA114A


Ordering Information

Part No.	Packing	Package
TSC114ACX	Tape & Reel	SOT-23
TSC114ACU		SOT-323

Note: **x** is the build-in resistor value type, option as

Code	R1 (KΩ)	R2 (KΩ)	Marking
C	10	10	8A

Equivalent Circuit

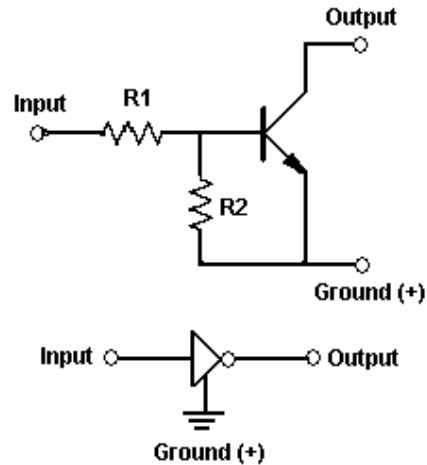

Input : Base
Output : Collector
Ground : Emitter

Absolute Maximum Rating (T_a = 25 °C unless otherwise noted)

Parameter	Symbol	Limit	Unit
Supply Voltage	V _{cc}	50	V
Input Voltage	V _{in}	- 10 ~ +40	V
Output Current	I _o	DC	50
		Pulse	100
Power Dissipation	SOT-23	P _D	250
	SOT-323		200
Operating Junction Temperature	T _J	+150	°C
Operating Junction and Storage Temperature Range	T _{STG}	- 55 to +150	°C

- Note: 1. Single pulse, P_w = 300μs, Duty ≤ 2%
 2. When mounted on an FR-4 PCB








Electrical Characteristics						
Ta = 25 °C unless otherwise noted						
Parameter	Conditions	Symbol	Min	Typ	Max	Unit
Input Voltage	Vcc= 5V, Io= 100uA	Vin(off)	--	--	0.5	V
	Vo= 0.3V, Io= 10mA	Vin(on)	3	--	--	V
Output Voltage	Io/Iin= 10mA/ 0.5mA	Vo(on)	--	0.1	0.3	V
Input Current	Vin= 5V	Iin	--	--	0.88	mA
Output Current	Vcc= 50V, Vin= 0V	Io(off)	--	--	0.5	uA
DC Current Gain	Vo= 5V, Io= 5mA	Gi	30	--	--	
Input Resistance		R1	0.7	10	1.3	KΩ
Resistance Ratio		R2/R1	0.8	1	1.2	
Transition Frequency	Vce= 10V, Ie= 5mA, f= 100MHz (note 1)	ft	--	250	--	MHz


Note : 1. Transition frequency of the device.

2. Pulse test: pulse width $\leq 380\mu\text{s}$, duty cycle $\leq 2\%$

Electrical Characteristics Curve

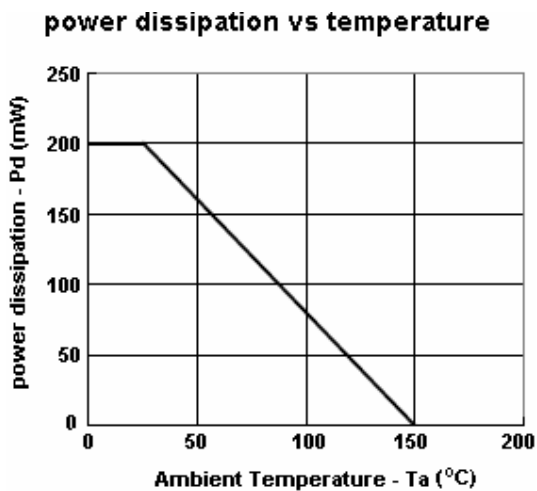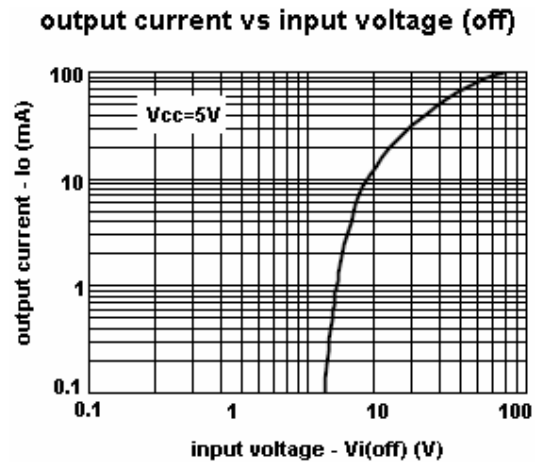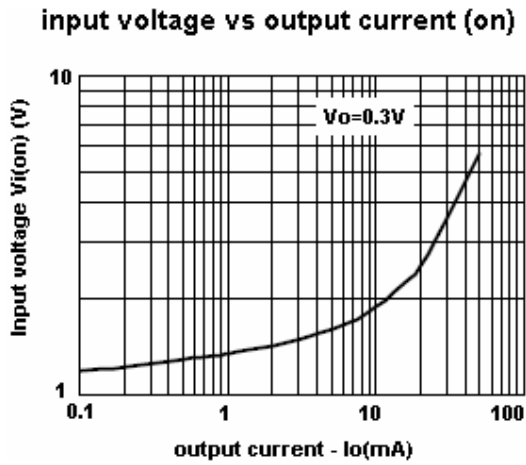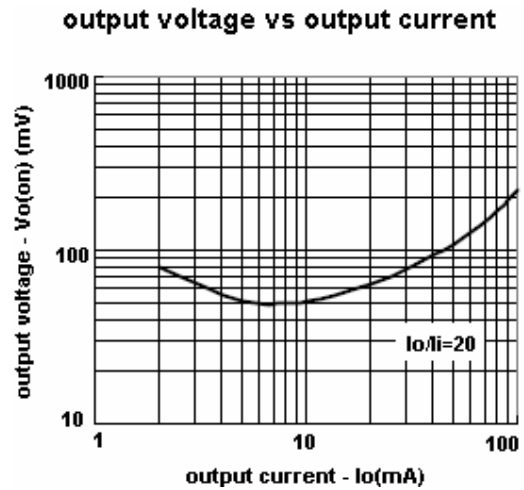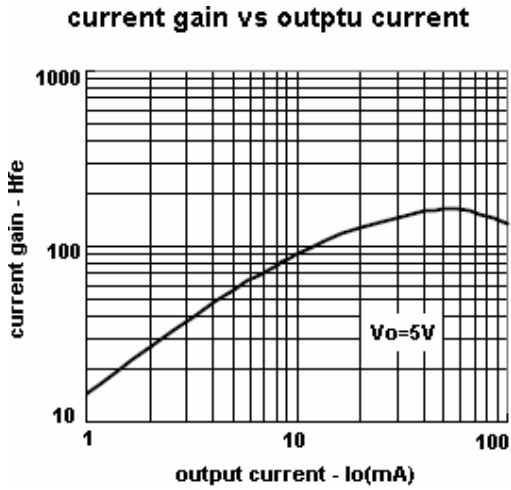


SOT-23 Mechanical Drawing

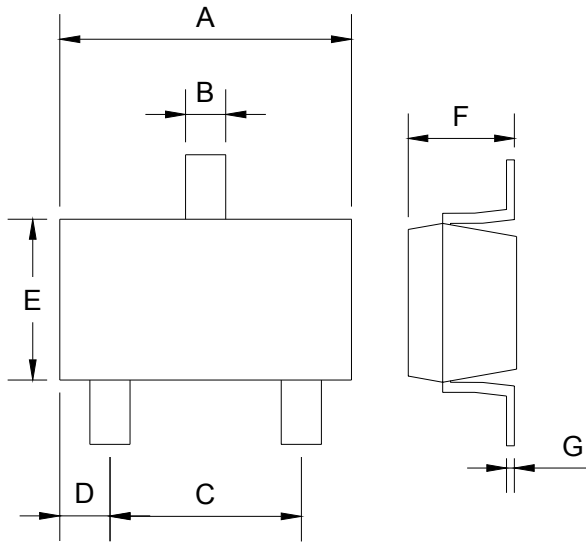

SOT-23 DIMENSION				
DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	2.88	2.91	0.113	0.115
B	0.39	0.42	0.015	0.017
C	1.78	2.03	0.070	0.080
D	0.51	0.61	0.020	0.024
E	1.59	1.66	0.063	0.065
F	1.04	1.08	0.041	0.043
G	0.07	0.09	0.003	0.004

SOT-323 Mechanical Drawing

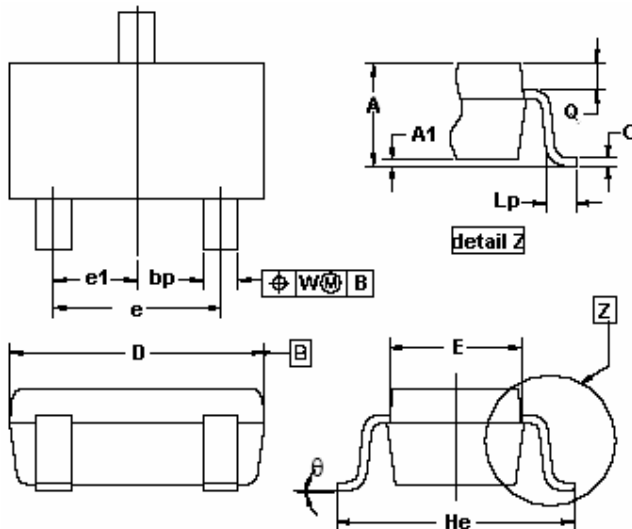

SOT-323 DIMENSION				
DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	0.80	1.10	0.0315	0.0433
A1	--	0.10	--	0.0039
bp	0.30	0.40	0.0118	0.0157
C	0.10	0.25	0.0039	0.0098
D	1.80	2.20	0.0709	0.0866
E	1.15	1.35	0.0453	0.0531
e	1.30	--	0.0512	--
e1	0.65	--	0.0256	--
He	2.00	2.20	0.0787	0.0866
Lp	0.15	0.45	0.0059	0.0177
Q	0.13	0.23	0.0051	0.0091
W	0.20	--	0.0079	--
Theta	10°	--	10°	--