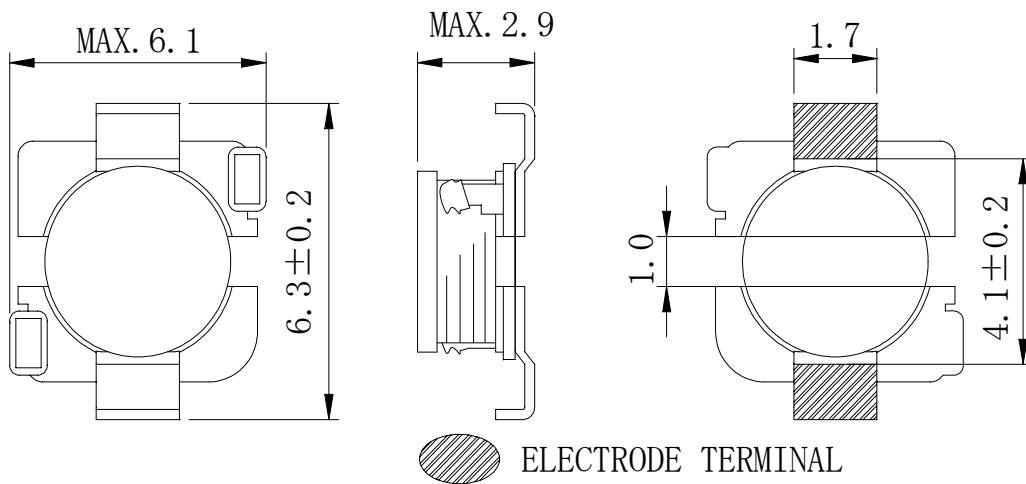
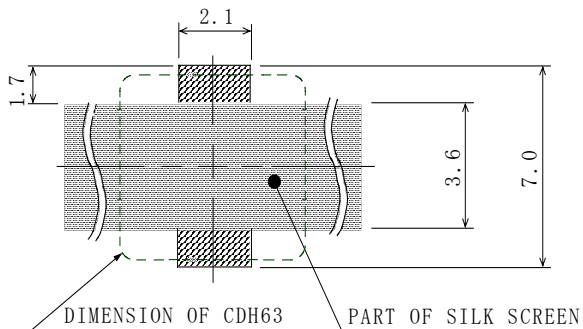


Type: CDH63
◆ Product Description

- 6.5×6.1mm Max.(L×W), 2.9mm Max. Height.
- Inductance Range: 1.4~220 μ H
- Rated current range: 0.19~2.55A
- In addition to the standard versions of inductors shown here, custom inductors are available to meet your exact requirements.


◆ Feature

- Magnetically unshielded construction.
- Ideally used in PDA,DVD,HDD, DVC, Game machine, Notebook PC, etc as DC-DC Converter inductors.
- RoHS Compliance

◆ Dimensions (mm)

◆ Land Pattern (mm)


Type: CDH63
◆ Specification

Part Name ※	Stamp	Inductance [Within] 100kHz/1V	D.C.R.(Ω) Max.(Typ.) (at 20°C)	Saturation Current (A) ※1		Temperature Rise current (A) ※2
				at 20°C	at 105°C	
CDH63NP-1R4M□	B	1.4 μH ±20%	35m(27.5m)	3.20	2.30	2.55
CDH63NP-2R0M□	C	2.0 μH ±20%	51m(41.0m)	2.60	2.00	2.30
CDH63NP-3R3M□	D	3.3 μH ±20%	70m(56m)	2.20	1.70	1.80
CDH63NP-3R9M□	E	3.9 μH ±20%	92m(73m)	2.00	1.40	1.65
CDH63NP-4R7M□	F	4.7 μH ±20%	105m(84m)	1.80	1.30	1.55
CDH63NP-5R6M□	G	5.6 μH ±20%	136m(109m)	1.60	1.15	1.35
CDH63NP-6R8M□	H	6.8 μH ±20%	144m(115m)	1.50	1.05	1.30
CDH63NP-8R2M□	I	8.2 μH ±20%	184m(147m)	1.28	1.00	1.20
CDH63NP-10R0M□	J	10 μH ±20%	209m(167m)	1.20	0.93	1.10
CDH63NP-12R0M□	K	12 μH ±20%	239m(191m)	1.15	0.85	1.00
CDH63NP-15R0M□	L	15 μH ±20%	275m(220m)	1.10	0.76	0.78
CDH63NP-18R0M□	M	18 μH ±20%	0.38(0.30)	0.94	0.73	0.75
CDH63NP-22R0M□	N	22 μH ±20%	0.45(0.36)	0.85	0.70	0.70
CDH63NP-27R0M□	O	27 μH ±20%	0.58(0.46)	0.75	0.61	0.63
CDH63NP-33R0M□	P	33 μH ±20%	0.66(0.53)	0.68	0.56	0.59
CDH63NP-39R0M□	Q	39 μH ±20%	0.78(0.62)	0.64	0.49	0.53
CDH63NP-47R0K□	R	47 μH ±10%	1.00(0.80)	0.59	0.46	0.48
CDH63NP-56R0K□	S	56 μH ±10%	1.13(0.90)	0.53	0.40	0.42
CDH63NP-68R0K□	T	68 μH ±10%	1.48(1.18)	0.48	0.37	0.39
CDH63NP-82R0K□	U	82 μH ±10%	1.60(1.33)	0.44	0.35	0.36
CDH63NP-10R1K□	V	100 μH ±10%	1.81(1.51)	0.39	0.31	0.34
CDH63NP-12R1K□	W	120 μH ±10%	2.40(2.00)	0.37	0.28	0.30
CDH63NP-15R1K□	X	150 μH ±10%	3.24(2.70)	0.31	0.24	0.23
CDH63NP-18R1K□	Y	180 μH ±10%	3.60(3.00)	0.29	0.22	0.21
CDH63NP-22R1K□	Z	220 μH ±10%	4.33(3.61)	0.27	0.20	0.19

※ Description of part name

CDH63NP-1R4M□

	B	Box
	C	Carrier Tape

※1.Saturation Current: The DC current at which the inductance decreases to 90% of it's initial value.

※2 Temperature rise current:The DC current at which the temperature rise is Δt=40°C.(Ta=20°C)