

SCHOTTKY BARRIER RECTIFIERS	REVERSE VOLTAGE - 20 to 100Volts FORWARD CURRENT - 1.0 Amperes
<p>FEATURES</p> <ul style="list-style-type: none"> ● Metal-Semiconductor junction with gard ring ● Epitaxial construction ● Low forward voltage drop ● High current capability ● The plastic material carries UL recognition 94V-0 ● For use in low vlotage, high frequency inverters, free wheeling, and polarity protection applications <p>MECHANICAL DATA</p> <ul style="list-style-type: none"> ●Case: JEDEC DO-41 molded plastic ●Polarity: Color band denotes cathode ●Weight: 0.012 ounces , 0.34 grams ●Mounting position: Any 	<p>DO- 41</p> <p>Dimensions in inches and (millimeters)</p>

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25°C ambient temperature unless otherwise specified.

Single phase, half wave ,60Hz, resistive or inductive load.

For capacitive load, derate current by 20%

CHARACTERISTICS	SYMBOL	SR120	SR130	SR140	SR150	SR160	SR180	SR1100	UNIT	
Maximum Recurrent Peak Reverse Voltage	VRRM	20	30	40	50	60	80	100	V	
Maximum RMS Voltage	VRMS	14	21	28	35	42	56	70	V	
Maximum DC Blocking Voltage	VDC	20	30	40	50	60	80	100	V	
Maximum Average Forward Rectified Current 0.375" (9.5mm) Lead Lengths @TL=100 °C	I(AV)	1.0							A	
Peak Forward Surage Current 8.3ms Single Half Sine-Wave Super Imposed on Rated Load(JEDEC Method)	IFSM	40							A	
Peak Forward Voltage at 1.0A DC	VF	0.45	0.55	0.6	0.70		0.85		V	
Maximum DC Reverse Current @TJ=25°C at Rated DC Bolcking Voltage @TJ=100°C	IR	1.0							10	mA
Typical Junction Capacitance (Note1)	CJ	110			80				pF	
Typical Thermal Resistance (Note2)	RθJL	15							°C/W	
Operating Temperature Range	TJ	-55 to +150							°C	
Storage Temperature Range	TSTG	-55 to +150							°C	

NOTES: 1.Measured at 1.0 MHz and applied reverse voltage of 4.0V DC.

2.Thermal resistance junction to lead.

FIG. 1 – FORWARD CURRENT DERATING CURVE

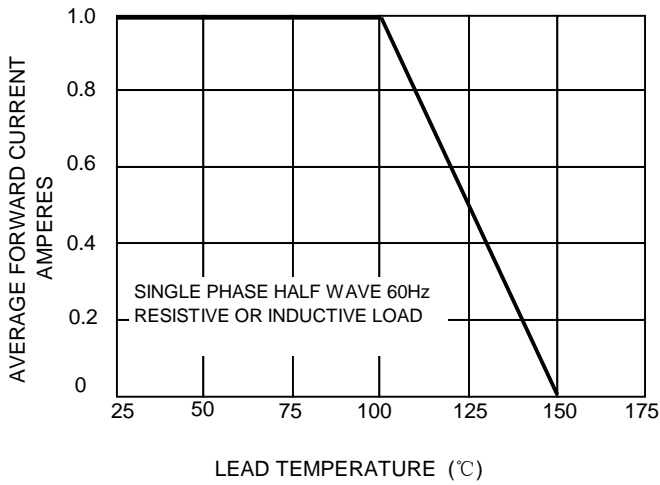


FIG. 2 – MAXIMUM NON-REPETITIVE SURGE CURRENT

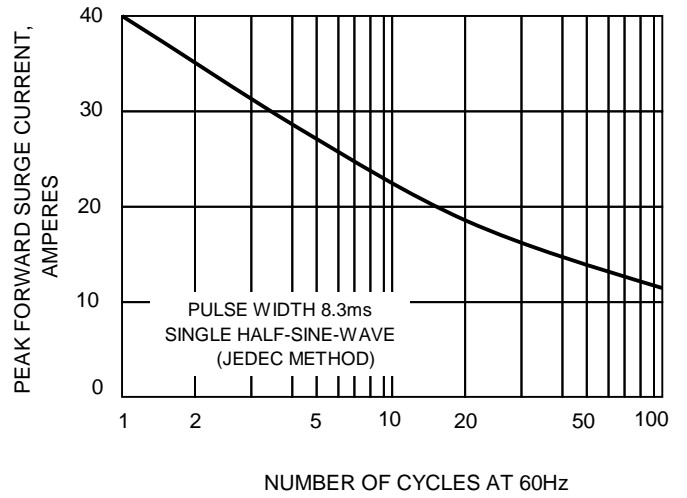


FIG.3 – TYPICAL JUNCTION CAPACITANCE

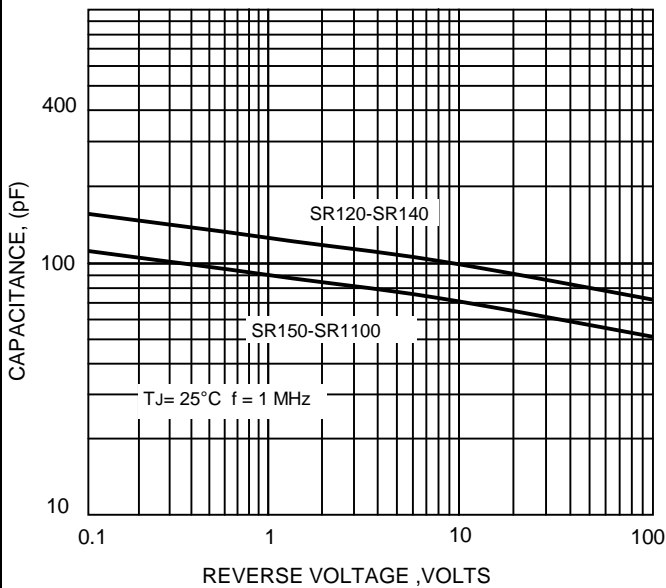


FIG.4-TYPICAL FORWARD CHARACTERISTICS

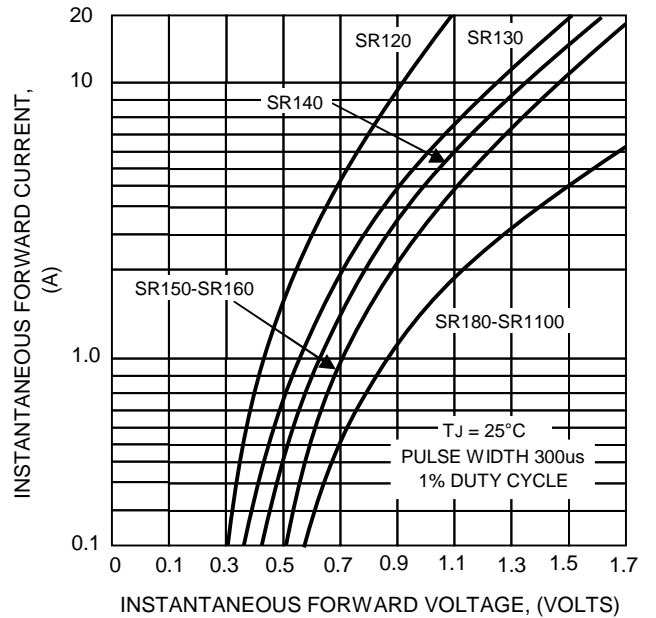


FIG.2-TYPICAL REVER CHARACTERISTICS

