

International **IR** Rectifier

SCHOTTKY RECTIFIER

MBRB20...CTG
MBR20...CTG-1

20 Amp

 $I_{F(AV)} = 20 \text{ Amp}$
 $V_R = 80/100V$
Major Ratings and Characteristics

Characteristics	Values	Units
$I_{F(AV)}$ Rectangular waveform (Per Device)	20	A
I_{FRM} @ $T_C = 133^\circ\text{C}$ (Per Leg)	20	A
V_{RRM}	80/ 100	V
I_{FSM} @ $t_p = 5 \mu\text{s}$ sine	850	A
V_F @ $10 \text{ Apk}, T_J = 125^\circ\text{C}$	0.70	V
T_J range	-65 to 150	°C


Description/ Features

This center tap Schottky rectifier has been optimized for low reverse leakage at high temperature. The proprietary barrier technology allows for reliable operation up to 150° C junction temperature. Typical applications are in switching power supplies, converters, free-wheeling diodes, and reverse battery protection.


- 150° C T_J operation
- Center tap D²Pak and TO-262 packages
- Low forward voltage drop
- High purity, high temperature epoxy encapsulation for enhanced mechanical strength and moisture resistance
- High frequency operation
- Guard ring for enhanced ruggedness and long term reliability

Case Styles

MBRB20...CTG

D²PAK

MBR20...CTG-1



TO-262

Voltage Ratings

Parameters	MBRB2080CTG MBR2080CTG-1	MBRB2090CTG MBR2090CTG-1	MBRB20100CTG MBR20100CTG-1
V_R Max. DC Reverse Voltage (V)	80	90	100
V_{RWM} Max. Working Peak Reverse Voltage (V)			

Absolute Maximum Ratings

Parameters	Values	Units	Conditions
$I_{F(AV)}$ Max. Average Forward Current (Per Leg) (Per Device)	10	A	@ $T_C = 133^\circ C$, (Rated V_R)
	20		
I_{FRM} Peak Repetitive Forward Current (Per Leg)	20	A	Rated V_R , square wave, 20kHz $T_C = 133^\circ C$
	850		
I_{FSM} Non Repetitive Peak Surge Current	150	A	5μs Sine or 3μs Rect. pulse Surge applied at rated load conditions halfwave, single phase, 60Hz
	850		
I_{RRM} Peak Repetitive Reverse Surge Current	0.5	A	2.0 μsec 1.0 KHz
E_{AS} Non-Repetitive Avalanche Energy (Per Leg)	24	mJ	$T_J = 25^\circ C$, $I_{AS} = 2$ Amps, $L = 12$ mH

Electrical Specifications

Parameters	Values	Units	Conditions
V_{FM} Max. Forward Voltage Drop (1)	0.80	V	@ 10A $T_J = 25^\circ C$
	0.95	V	
	0.70	V	@ 10A $T_J = 125^\circ C$
	0.85	V	
I_{RM} Max. Instantaneous Reverse Current (1)	0.10	mA	$T_J = 25^\circ C$ $T_J = 125^\circ C$ Rated DC voltage
	6	mA	
$V_{F(TO)}$ Threshold Voltage	0.433	V	$T_J = T_J$ max.
r_t Forward Slope Resistance	15.8	mΩ	
C_T Max. Junction Capacitance	400	pF	$V_R = 5V_{DC}$ (test signal range 100Khz to 1Mhz) 25°C
L_S Typical Series Inductance	8.0	nH	Measured from top of terminal to mounting plane
dv/dt Max. Voltage Rate of Change	10000	V/ μs	(Rated V_R)

(1) Pulse Width < 300μs, Duty Cycle <2%

Thermal-Mechanical Specifications

Parameters	Values	Units	Conditions
T_J Max. Junction Temperature Range	-65 to 150	°C	
T_{stg} Max. Storage Temperature Range	-65 to 175	°C	
R_{thJC} Max. Thermal Resistance Junction to Case (Per Leg)	2.0	°C/W	DC operation
R_{thCS} Typical Thermal Resistance Case to Heatsink	0.50	°C/W	Mounting surface, smooth and greased Only for TO-220
R_{thJA} Max. Thermal Resistance Junction to Ambient	50	°C/W	DC operation For D2Pak and TO-262
wt Approximate Weight	2 (0.07)	g(oz.)	
T Mounting Torque	Min. 6 (5)	Kg-cm (lbf-in)	Non-lubricated threads
	Max. 12 (10)		
Marking Device	MBRB20100CTG		Case style D ² -Pak
	MBR20100CTG-1		Case style TO-262

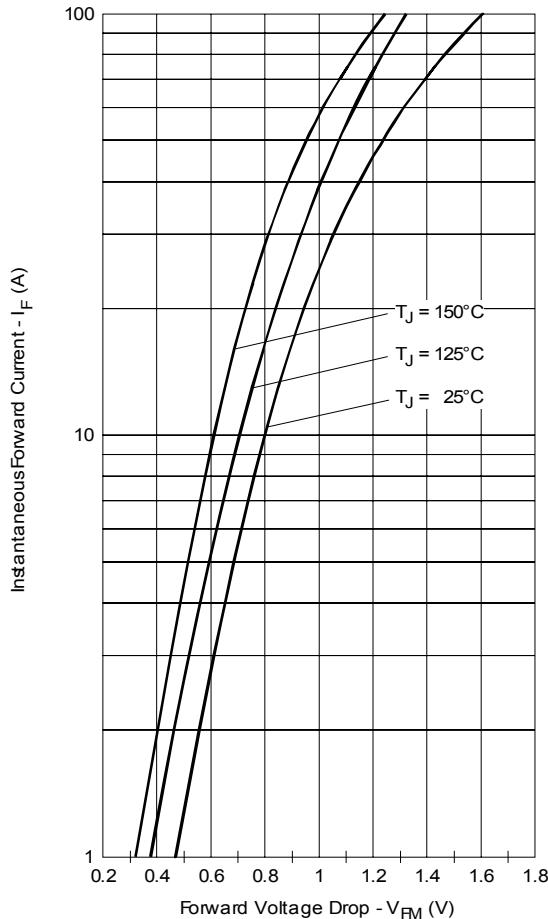


Fig. 1 - Max. Forward Voltage Drop Characteristics
 (Per Leg)

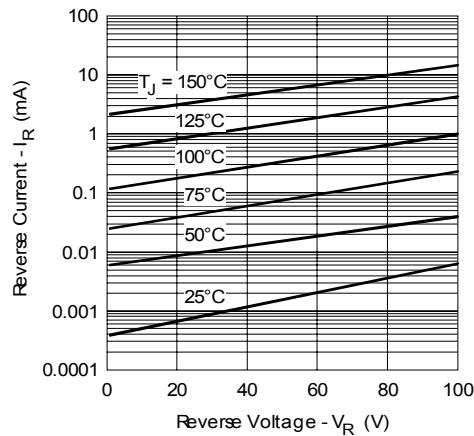


Fig. 2 - Typical Values Of Reverse Current
 Vs. Reverse Voltage (Per Leg)

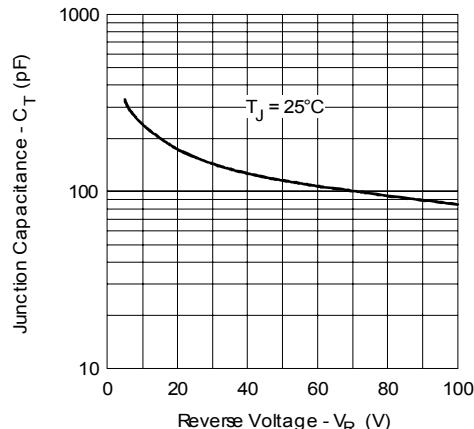


Fig. 3 - Typical Junction Capacitance
 Vs. Reverse Voltage (Per Leg)

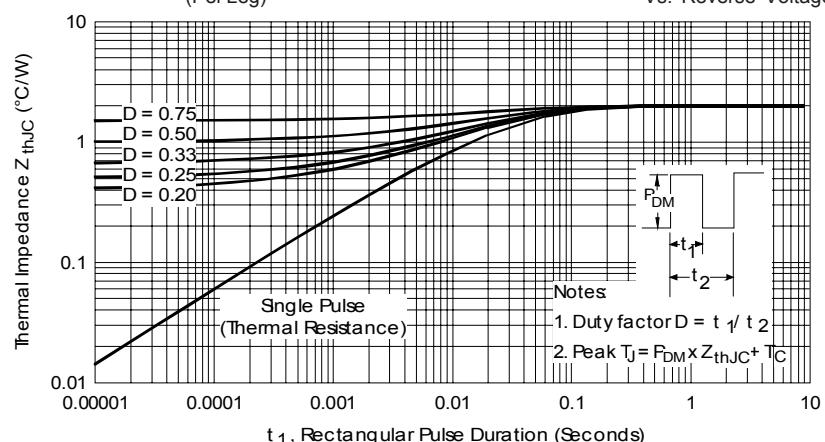


Fig. 4 - Max. Thermal Impedance Z_{thJC} Characteristics (Per Leg)

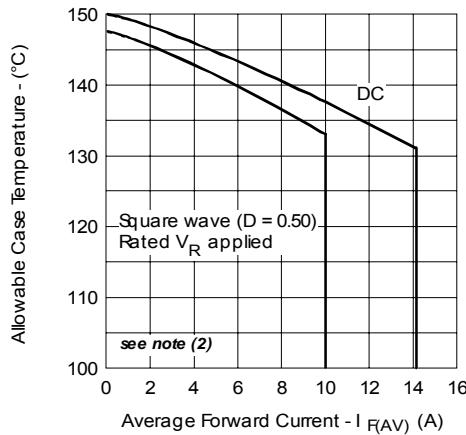


Fig. 5 - Max. Allowable Case Temperature Vs. Average Forward Current (Per Leg)

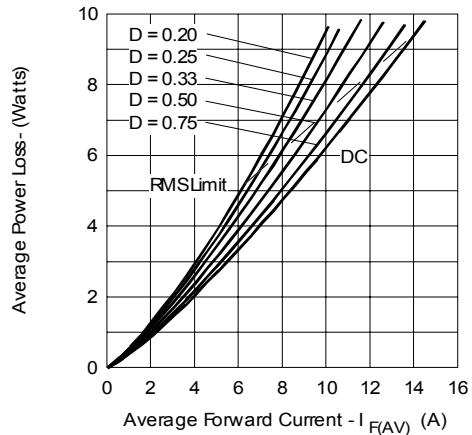


Fig. 6 - Forward Power Loss Characteristics (Per Leg)



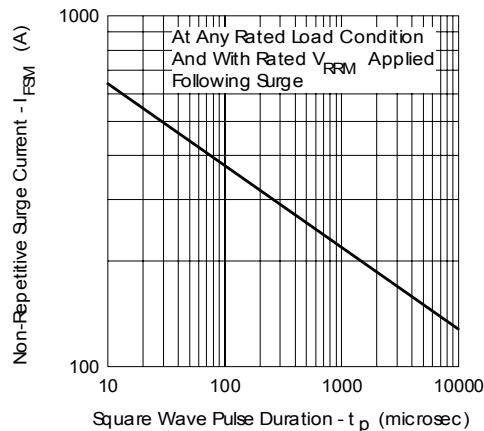



Fig. 7 - Max. Non-Repetitive Surge Current (Per Leg)

(2) Formula used: $T_C = T_J - (P_d + P_{d_{REV}}) \times R_{thJC}$;
 $P_d = \text{Forward Power Loss} = I_{F(AV)} \times V_{FM} @ (I_{F(AV)} / D)$ (see Fig. 6);
 $P_{d_{REV}} = \text{Inverse Power Loss} = V_{R1} \times I_R (1 - D)$; $I_R @ V_{R1} = \text{rated } V_R$


Outline Table

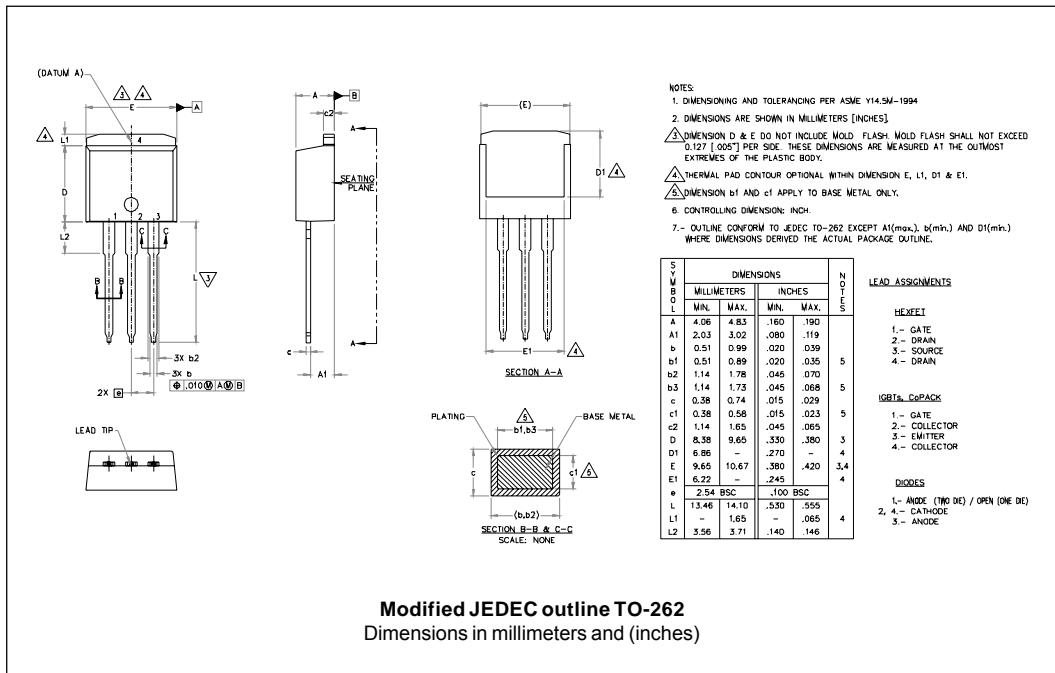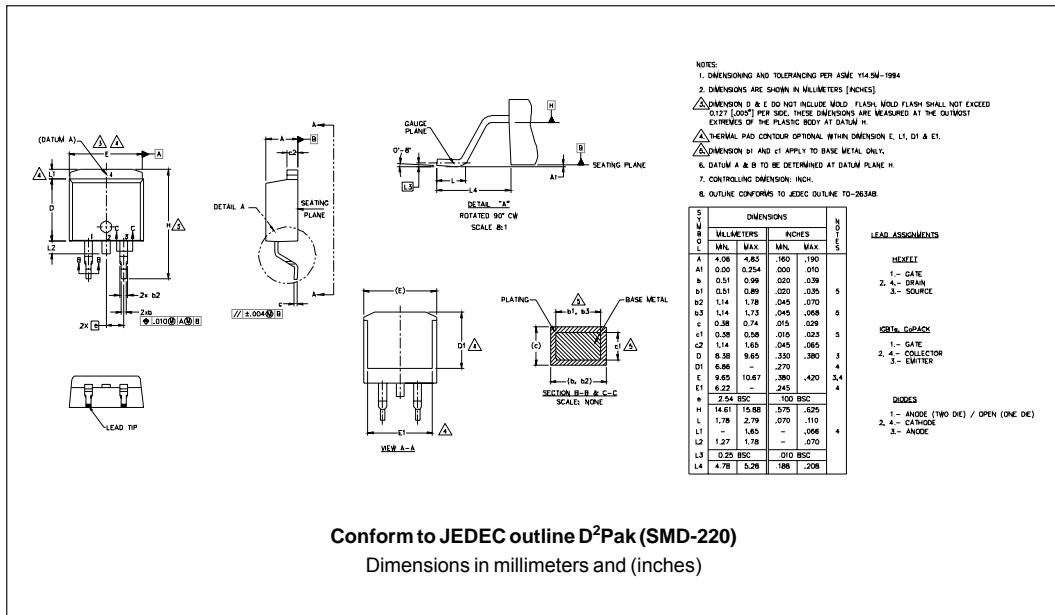

Tape & Reel Information

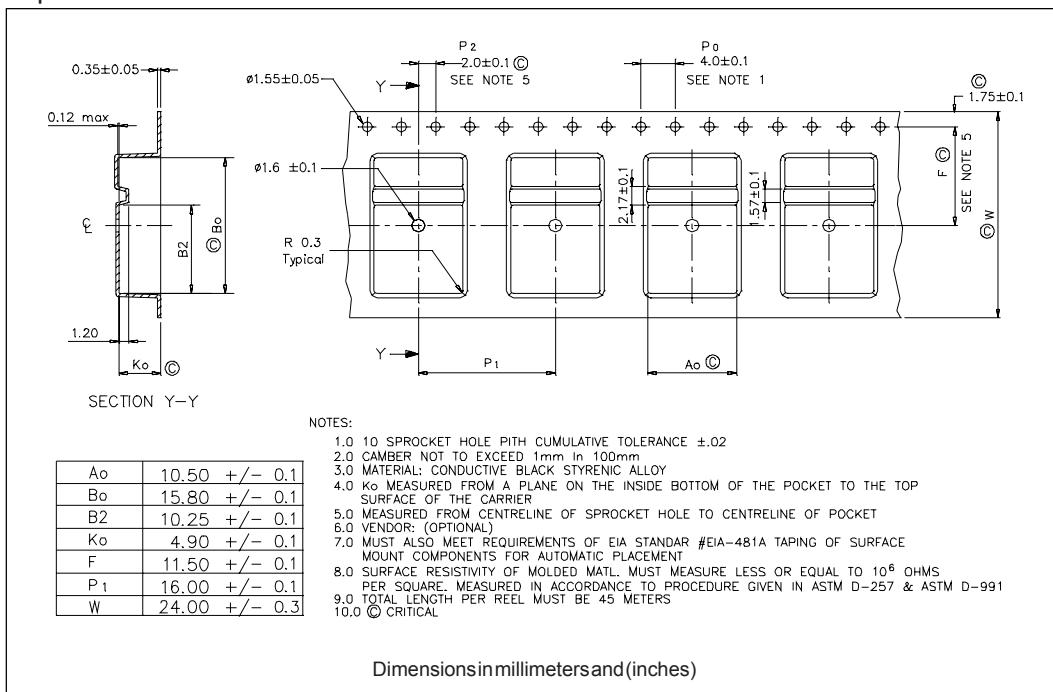

Part Marking Information

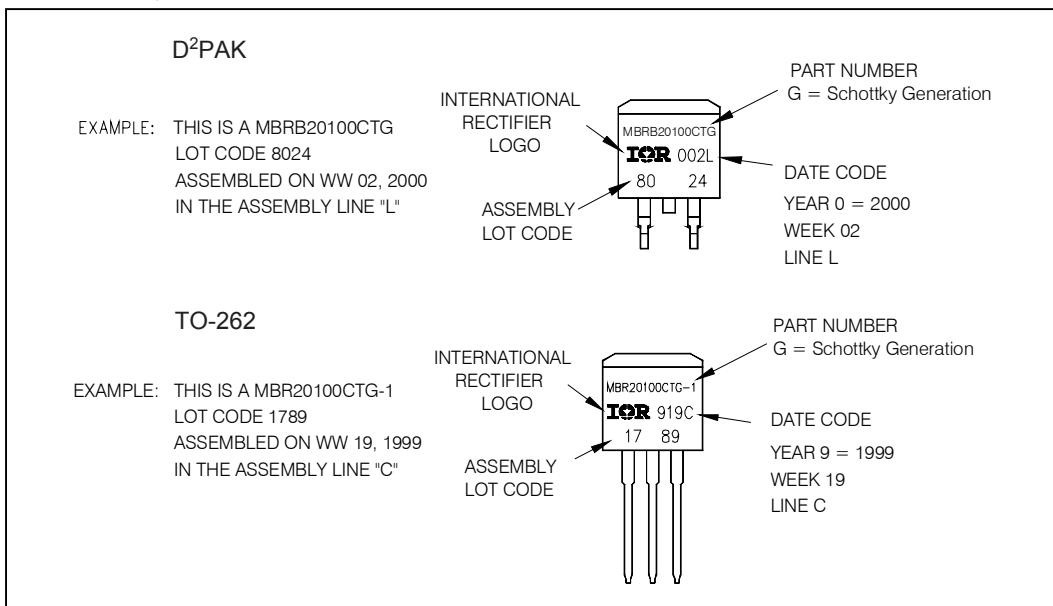

Ordering Information Table

Device Code	MBR	B	20	100	CT	G	-1	TRL	-
	(1)	(2)	(3)	(4)	(5)	(6)	(7)	(8)	(9)
1	- Essential Part Number								
2	-	• B = D ² Pak							
		• none = TO-262							
3	- Current Rating (20 = 20A)								80 = 80V
4	- Voltage Ratings								90 = 90V
5	- CT = Essential Part Number								100 = 100V
6	- G = Schottky Generation								
7	-	• none = D ² Pak							
		• -1 = TO-262							
8	-	• none = Tube (50 pieces)							
		• TRL = Tape & Reel (Left Oriented - for D ² Pak only)							
		• TRR = Tape & Reel (Right Oriented - for D ² Pak only)							
9	-	• none = Standard Production							
		• PbF = Lead-Free (D ² Pak tube)							
		• P = Lead-Free (for D ² Pak TRR and TRL, and TO-262)							

Data and specifications subject to change without notice.
 This product has been designed and qualified for Industrial Level.
 Qualification Standards can be found on IR's Web site.

International
IR Rectifier

IR WORLD HEADQUARTERS: 233 Kansas St., El Segundo, California 90245, USA Tel: (310) 252-7105
 TAC Fax: (310) 252-7309
 Visit us at www.irf.com for sales contact information. 01/07