



**CRYSTEK**  
**CRYSTALS**  
A DIVISION OF CRYSTEK CORPORATION

CCPD-033 LVPECL  
Clock Oscillator  
5x7mm SMD  
3.3 Volts



**Model CCPD-033 is a 77.760MHz to 161.000MHz LVPECL Clock Oscillator operating at 3.3Volts. The oscillator utilizes a High Q Third Overtone crystal design providing very low Jitter and Phase Noise. No Sub-Harmonics are present in the Output Signal.**



5x7mm SMD

### **Applications:**

**Digital Video  
SONET/SDH/DWDM  
Storage Area Networks  
Broadband Access  
Ethernet, Gigabit Ethernet**



# CRYSTEK


## CRYSTALS

A DIVISION OF CRYSTEK CORPORATION

### CCPD-033 LVPECL Clock Oscillator 5x7mm SMD 3.3 Volts



<b>Frequency Range:</b>	<b>77.760MHz to 161.000MHz</b>
<b>Frequency Stability Options(ppm):</b>	<b>±20, ±25, ±50, ±100</b>
<b>Temperature Range: (standard)</b>	<b>0°C to +70°C</b>
<b>(Option M)</b>	<b>-20°C to +70°C</b>
<b>(Option X)</b>	<b>-40°C to +85°C</b>
<b>Storage:</b>	<b>-55°C to 120°C</b>
<b>Input Voltage:</b>	<b>3.3V ± 0.3V</b>
<b>Input Current:</b>	<b>55mA Typ., 88mA Max</b>
<b>Output:</b>	<b>Differential LVPECL</b>
<b>Symmetry:</b>	<b>45/55% Max @ 50% Vdd</b>
<b>Rise/Fall Time:</b>	<b>1nsec Max @ 20% to 80% Vdd</b>
<b>Logic:</b>	<b>Terminated to Vdd-2V into 50 ohms</b>
<b>Temp. 0°C to 85°C</b>	<b>“0”=1.490 Min., 1.680 Max</b>
	<b>“1”=2.275 Min., 2.420 Max</b>
<b>Temp. -40°C to 0°C</b>	<b>“0”=1.470 Min., 1.745 Max</b>
	<b>“1”=2.215 Min., 2.420 Max</b>
<b>Disable Time</b>	<b>200nSec Max</b>
<b>Start-up Time</b>	<b>1mSec Typ., 2mSec Max</b>
<b>Phase Jitter:</b>	<b>12KHz~80MHz</b>
<b>Phase Noise:</b>	<b>(See Plot Below)</b>
<b>Sub-harmonics:</b>	<b>None</b>
<b>Aging:</b>	<b>&lt;3ppm 1<sup>st</sup> year, &lt;1ppm every year thereafter</b>

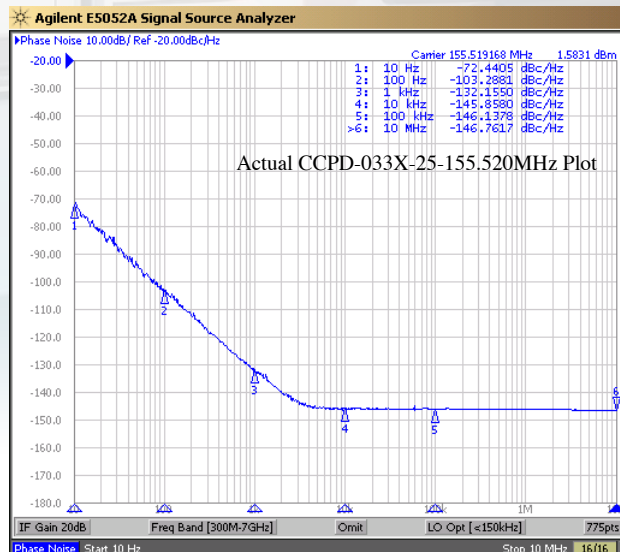



# CRYSTEK

## CRYSTALS

A DIVISION OF CRYSTEK CORPORATION

### CCPD-033 LVPECL Clock Oscillator 5x7mm SMD 3.3 Volts



#### PART NUMBER GUIDE

CCPD - 033 X - 25 - 155.520

- #1 Crystek PECL Oscillator
- #2 Model 033
- #3 Temp. Range (Blank=0/70°C)(M=-20/70°C)(X=-40/85°C)
- #4 Stability: (see Table 1)
- #5 Frequency in MHz: 3 or 6 decimal places

Example:

CCPD-033X-25-155.520

3.3V, -40/85°C, ±25ppm, 155.520 MHz

#### Stability Indicator

Blank(std)	±100ppm
50	±50ppm
25	±25ppm
20	±20ppm

Table 1


#### Mechanical:

- Shock:** MIL-STD-883, Method 2002, Condition B
- Solderability:** MIL-STD-883, Method 2003
- Vibration:** MIL-STD-883, Method 2007, Condition A
- Solvent Resistance:** MIL-STD-202, Method 215
- Resistance to Soldering Heat:** MIL-STD-202, Method 210, Condition I or J


#### Environmental:

- Thermal Shock:** MIL-STD-883, Method 1011, Condition A
- Moisture Resistance:** MIL-STD-883, Method 1004


#### RECOMMENDED REFLOW SOLDERING PROFILE

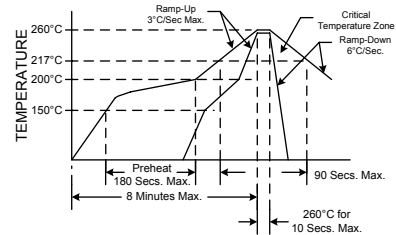


NOTE: Reflow Profile with 240°C peak also acceptable.




Denotes pad 1

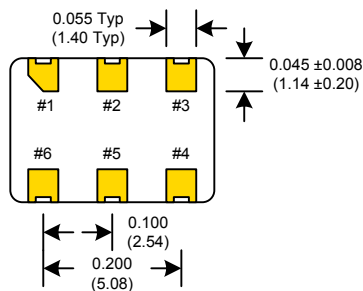

Dimensions inches (mm)  
All dimensions are Max unless otherwise specified.



#### SUGGESTED PAD LAYOUT



0.01uF Bypass Capacitor Recommended

#### Tri-State Function

Pin #1 State	Output State
Open or N/C	Active
"1" level 0.7*Vcc Min	Active
"0" level 0.3*Vcc Max	High Z

Pad	Connection
1	Enable/Disable
2	N/C
3	GND
4	Out
5	Comp. Out
6	VCC