

1.0X0.5mm SMD CHIP LED LAMP

PRELIMINARY SPEC



ATTENTION OBSERVE PRECAUTIONS FOR HANDLING **ELECTROSTATIC** DISCHARGE SENSITIVE **DEVICES**

Part Number: APHHS1005PBC/Z

Blue

Features

- 1.0mmX0.5mm SMT LED, 0.5mm THICKNESS.
- LOW POWER CONSUMPTION.
- WIDE VIEWING ANGLE.
- IDEAL FOR BACKLIGHT AND INDICATOR.
- VARIOUS COLORS AND LENS TYPES AVAILABLE.
- PACKAGE: 2000PCS / REEL .
- MOISTURE SENSITIVITY LEVEL: LEVEL 3.
- RoHS COMPLIANT.

Description


The Blue source color devices are made with InGaN on SiC Light Emitting Diode.


Static electricity and surge damage the LEDS.

It is recommended to use a wrist band or anti-electrostatic glove when handling the LEDs.

All devices, equipment and machinery must be electrically grounded.

Package Dimensions



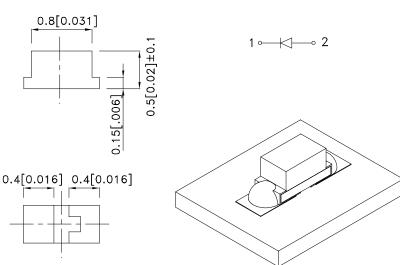

- 1. All dimensions are in millimeters (inches).
- 2. Tolerance is ±0.1(0.004") unless otherwise noted.
- 3. Specifications are subject to change without notice.4. The device has a single mounting surface. The device must be mounted according to the specifications.





SPEC NO: DSAH3757 **REV NO: V.1** DATE: JUN/05/2007 PAGE: 1 OF 5 APPROVED: WYNEC CHECKED: Allen Liu DRAWN: Y.L.LI ERP: 1203006729

Selection Guide

Part No.	Dice	Lens Type	lv (mcd) [2] @ 20mA		Viewing Angle [1]
		,	Min.	Тур.	201/2
APHHS1005PBC/Z	Blue (InGaN)	WATER CLEAR	50	160	120°

Notes:

- 1. θ 1/2 is the angle from optical centerline where the luminous intensity is 1/2 the optical centerline value. 2. Luminous intensity/ luminous Flux: +/-15%.

Electrical / Optical Characteristics at TA=25°C

Symbol	Parameter	Device	Тур.	Max.	Units	Test Conditions
λpeak	Peak Wavelength	Blue	467		nm	IF=20mA
λD [1]	Dominant Wavelength	Blue	470		nm	IF=20mA
Δλ1/2	Spectral Line Half-width	Blue	22		nm	IF=20mA
С	Capacitance	Blue	110		pF	VF=0V;f=1MHz
VF [2]	Forward Voltage	Blue	3.2	4	V	IF=20mA
lR	Reverse Current	Blue		10	uA	V _R =5V

- 1.Wavelength: +/-1nm.
- 2. Forward Voltage: +/-0.1V.


Absolute Maximum Ratings at TA=25°C

Parameter	Blue	Units		
Power dissipation	120	mW		
DC Forward Current	30	mA		
Peak Forward Current [1]	100	mA		
Reverse Voltage	5	V		
Operating Temperature	-40°C To +85°C			
Storage Temperature	-40°C To +85°C			

Note:

1. 1/10 Duty Cycle, 0.1ms Pulse Width.

SPEC NO: DSAH3757 **REV NO: V.1** DATE: JUN/05/2007 PAGE: 2 OF 5 APPROVED: WYNEC **CHECKED: Allen Liu** DRAWN: Y.L.LI ERP: 1203006729

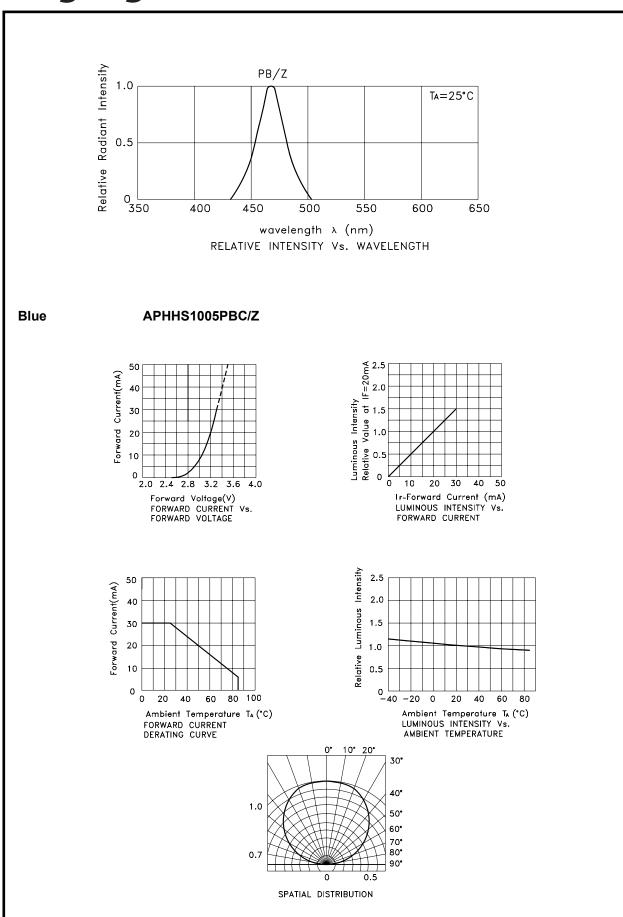


 SPEC NO: DSAH3757
 REV NO: V.1
 DATE: JUN/05/2007
 PAGE: 3 OF 5

 APPROVED: WYNEC
 CHECKED: Allen Liu
 DRAWN: Y.L.LI
 ERP: 1203006729

APHHS1005PBC/Z


Reflow Soldering Profile For Lead-free SMT Process.

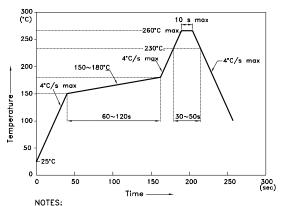


- NOTES:

 1.We recommend the reflow temperature 245°C(+/-5°C).The maximum soldering temperature should be limited to 260°C. 2.Don't cause stress to the epoxy resin while it is exposed to high temperature.
 3.Number of reflow process shall be 2 times or less.

Recommended Soldering Pattern (Units: mm; Tolerance: ± 0.1)




Tape Specifications (Units: mm)

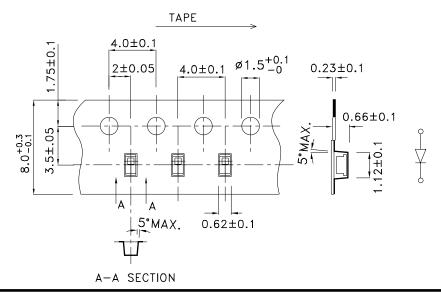


SPEC NO: DSAH3757 APPROVED: WYNEC

REV NO: V.1 CHECKED: Allen Liu **DATE: JUN/05/2007** DRAWN: Y.L.LI

PAGE: 4 OF 5 ERP: 1203006729

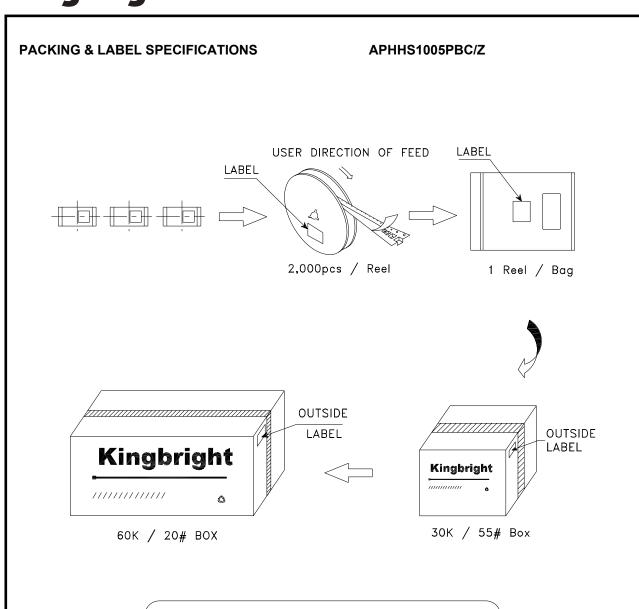

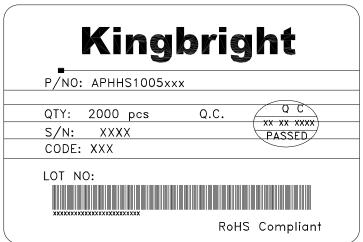

SPEC NO: DSAH3757 APPROVED: WYNEC REV NO: V.1 CHECKED: Allen Liu DATE: JUN/05/2007 DRAWN: Y.L.LI PAGE: 5 OF 5 ERP: 1203006729