



BY251 THRU BY255

3.0 AMPS. Silicon Rectifiers

	Voltage Range 200 to 1300 Volts Current 3.0 Amperes
--	--

<p>Features</p> <ul style="list-style-type: none"> ✧ Low forward voltage drop ✧ High current capability ✧ High reliability ✧ High surge current capability <p>Mechanical Data</p> <ul style="list-style-type: none"> ✧ Cases: Molded plastic ✧ Epoxy: UL 94V-O rate flame retardant ✧ Lead: Axial leads, solderable per MIL-STD-202, Method 208 guaranteed ✧ Polarity: Color band denotes cathode end ✧ High temperature soldering guaranteed: 260°C/10 seconds/.375", (9.5mm) lead lengths at 5 lbs., (2.3kg) tension ✧ Weight: 1.2 grams 	<p>DO-201AD</p> <p>Dimensions in inches and (millimeters)</p>
--	---

Maximum Ratings and Electrical Characteristics
 Rating at 25°C ambient temperature unless otherwise specified.
 Single phase, half wave, 60 Hz, resistive or inductive load.
 For capacitive load, derate current by 20%

Type Number	Symbol	BY251	BY252	BY253	BY254	BY255	Units
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	200	400	600	800	1300	V
Maximum RMS Voltage	V_{RMS}	140	280	420	560	910	V
Maximum DC Blocking Voltage	V_{DC}	200	400	600	800	1300	V
Maximum Average Forward Rectified Current .375 (9.5mm) Lead Length @ $T_A = 75^\circ C$	$I_{(AV)}$	3.0					A
Peak Forward Surge Current, 8.3 ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	I_{FSM}	150					A
Maximum Instantaneous Forward Voltage @ 3.0A	V_F	1.0					V
Maximum DC Reverse Current @ $T_A=25^\circ C$ at Rated DC Blocking Voltage @ $T_A=100^\circ C$	I_R	5.0 100					μA μA
Maximum Full Load Reverse Current, Full Cycle Average .375"(9.5mm) Lead Length @ $T_L=75^\circ C$	HTIR	30					μA
Typical Junction Capacitance (Note 1)	C_j	40					pF
Typical Thermal Resistance (Note 2)	$R_{\theta JA}$	40					$^{\circ}C/W$
Operating Temperature Range	T_J	-65 to +150					$^{\circ}C$
Storage Temperature Range	T_{STG}	-65 to +150					$^{\circ}C$

Notes: 1. Measured at 1 MHz and Applied Reverse Voltage of 4.0 V D.C.
 2. Mount on Cu-Pad Size 16mm x 16mm on P.C.B.

RATINGS AND CHARACTERISTIC CURVES (BY251 THRU BY255)

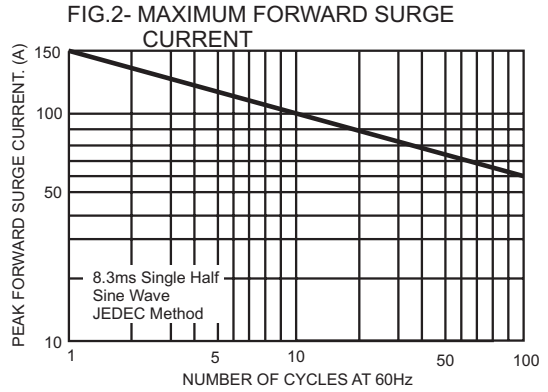
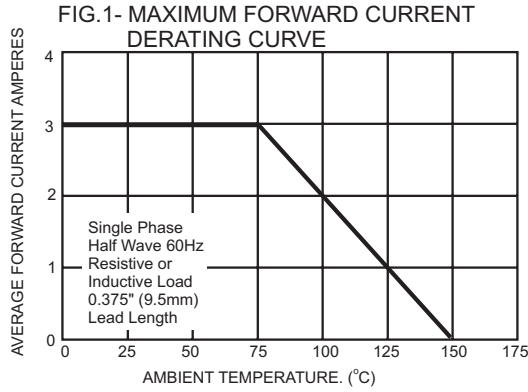


FIG.3- TYPICAL FORWARD CHARACTERISTICS

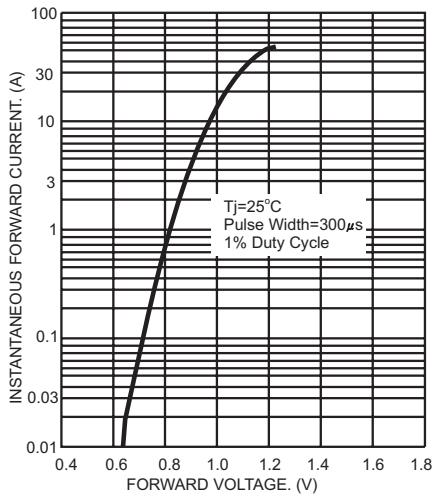


FIG.4- TYPICAL JUNCTION CAPACITANCE

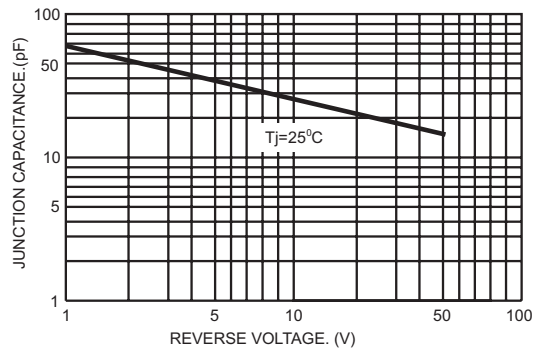


FIG.5- TYPICAL REVERSE CHARACTERISTICS

