



EVERLIGHT ELECTRONICS CO.,LTD.

Device Number : CDLE-033-447 REV: 1

5.0mm Multi-Color Round Type LED Lamps

MODEL NO : 336VYVGW ECN : Page: 1/5

■ Features :

- Two chips are matched for uniform light output, wide viewing angle
- Long life-solid state reliability
- IC compatible/Low power consuming



■ Descriptions :

- The 336 LED lamp contain two integral chips and are available as both bicolor and bipolar types.
- The Yellow Light and Green light is emitted by diodes of GaAsP and GaP respectively.
- Type of bipolar lamps are both White Diffused and Color Diffused while the bicolor are White Diffused.

■ Applications :

- TV set
- Monitor
- Telephone
- Computer

■ Package Dimensions:

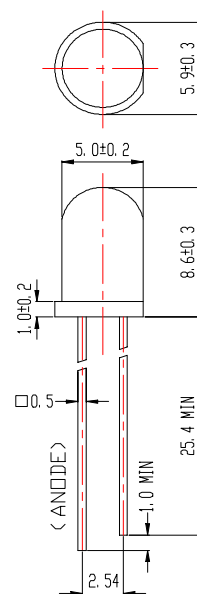

■ Notes :

- 1.All dimensions are in millimeters.
- 2.An epoxy meniscus may extend about 1.5mm(0.059") down to the lead.

PART NO	Chip		Lens Color
	Material	Emitted Color	
336VYVGW	GaAsP/GaP	Yellow	White Diffused
	GaP	Green	

OFFICE : NO. 25,Lane 76,Sec.3, Chung Yang Rd., Tucheng 236, Taipei, Taiwan, R.O.C.

TEL : 886-2-2267-2000,2267-9936

FAX : 886-2-2267-6244,22676189,22676306

<http://www.everlight.com>

T00033,B89010113



EVERLIGHT ELECTRONICS CO.,LTD.

Device Number : CDLE-033-447 REV: 1

5.0mm Multi-Color Round Type LED Lamps

MODEL NO : 336VYVGW ECN : Page: 2/5

■ Absolute Maximum Ratings at Ta = 25°C

Parameter	Symbol	Rating	Unit
Forward Current	If	VY 30	mA
		VG 30	
Operating Temperature	Topr	-40 to +85	°C
Storage Temperature	Tstg	-40 to +100	°C
Soldering Temperature	Tsol	260 ± 5	°C
Power Dissipation	Pd	VY 85	mW
		VG 100	
Peak Forward Current (Duty 1/10 @ 1KHZ)	If(Peak)	VY 160	mA
		VG 160	
Reverse Voltage	Vr	5	V

■ Electronic Optical Characteristics :

Parameter	Symbol	Min	TYP.	MAX.	Unit	Condition
Luminous Intensity	Iv VY	4.0	8.0	/	mcd	If= 20 mA
	VG	6.3	12.5	/		
Viewing Angle	2θ 1/2	/	180	/	deg	If= 20 mA
Peak Wavelength	λ p VY	/	585	/	nm	If= 20 mA
	VG	/	570	/		
Dominant Wavelength	λ d VY	/	590	/	nm	If= 20 mA
	VG	/	571	/		
Spectrum Radiation Bandwidth	△ λ VY	/	35	/	nm	If= 20 mA
	VG	/	30	/		
Forward Voltage	Vf VY	1.7	2.0	2.4	V	If= 20 mA
	VG	1.7	2.1	2.4		
Reverse Current	Ir	/	/	10	μ A	Vr= 5 V



EVERLIGHT ELECTRONICS CO.,LTD.

Device Number : CDLE-033-447

REV: 1







5.0mm Multi-Color Round Type LED Lamps

MODEL NO : 336VYVGW

ECN :

Page: 3/5

■ Typical Electro-Optical Characteristic Curves:

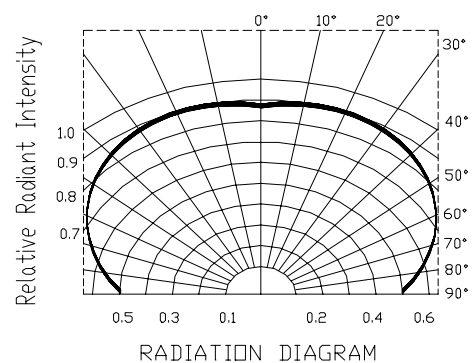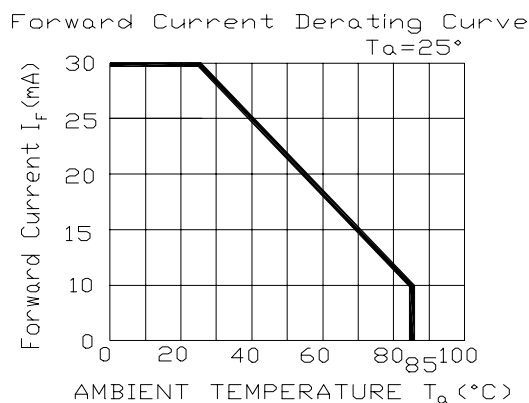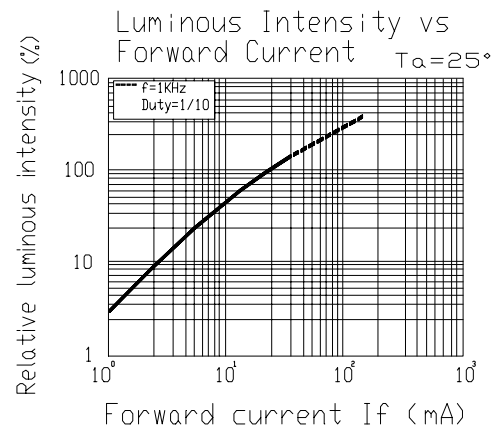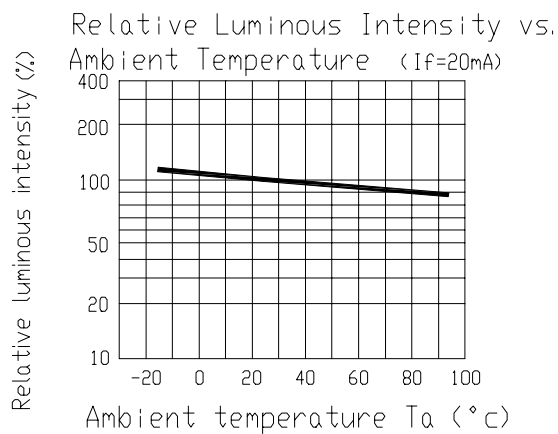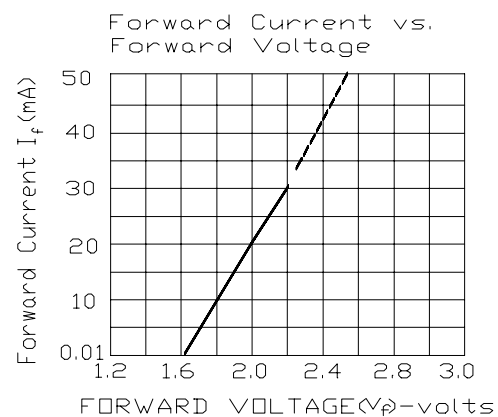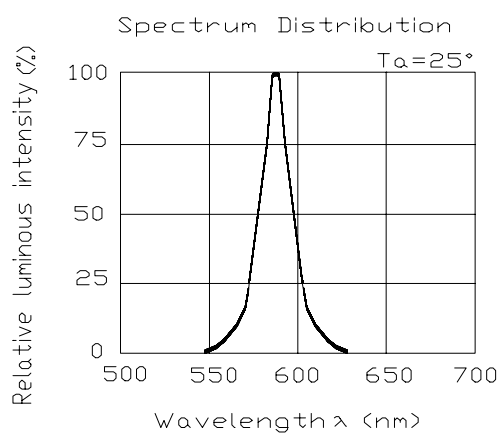



EVERLIGHT ELECTRONICS CO.,LTD.

Device Number : CDLE-033-447

REV: 1

5.0mm Multi-Color Round Type LED Lamps







MODEL NO : 336VYVGW

ECN :

Page: 4/5

■ Typical Electro-Optical Characteristic Curves:

(V G)

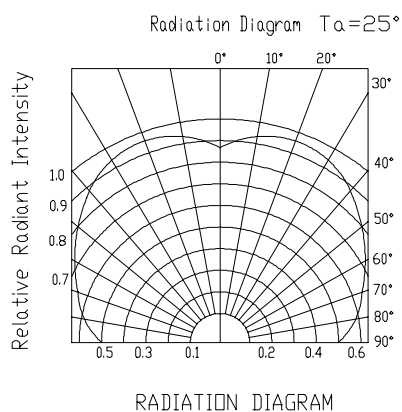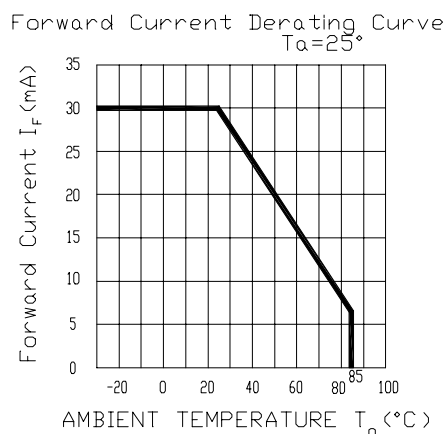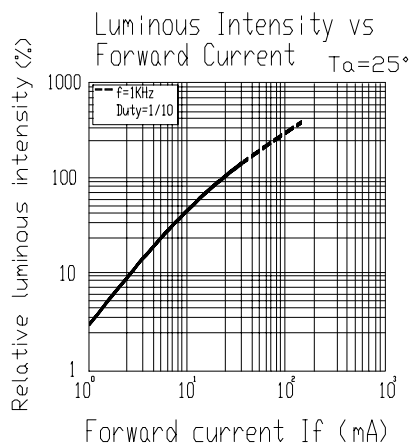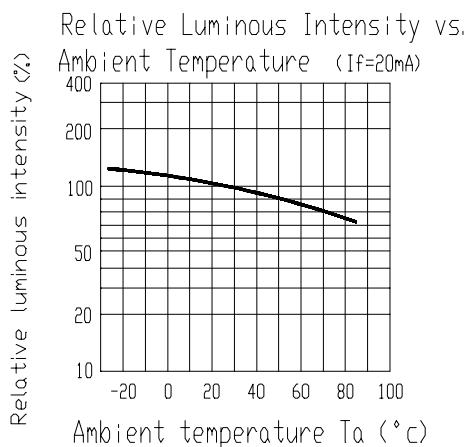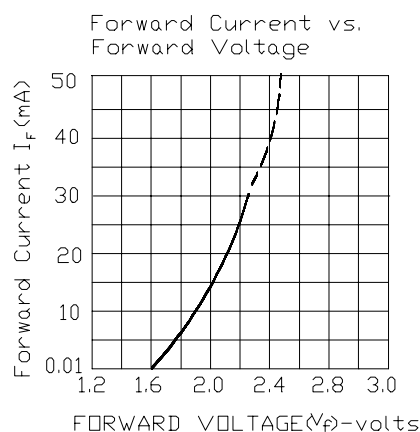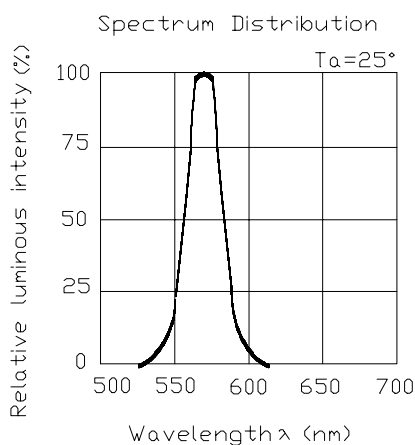



EVERLIGHT ELECTRONICS CO.,LTD.

Device Number : CDLE-033-447 REV: 1

5.0mm Multi-Color Round Type LED Lamps

MODEL NO : 336VYVGW ECN : Page: 5/5

■ Reliability test item and conditions:

NO	Item	Test Conditions	Test Hours/Cycle	Sample Size	Ac/Re
1	Solder Heat	TEMP : 260°C ± 5 °C	5 SEC	76 PCS	0/1
2	Temperature Cycle	H : +85°C 30min └ 5 min L : -55°C 30min	50 CYCLES	76 PCS	0/1
3	Thermal Shock	H : +100°C 5min └ 10 sec L : -10°C 5min	50 CYCLES	76 PCS	0/1
4	High Temperature Storage	TEMP : 100°C	1000 HRS	76 PCS	0/1
5	Low Temperature Storage	TEMP : -55°C	1000 HRS	76 PCS	0/1
6	DC Operating Life	If = 20 mA	1000 HRS	76 PCS	0/1
7	High Temperature / High Humidity	85°C/85% RH	1000 HRS	76 PCS	0/1