


FEATURES

- Industry Standard 12.7x12.7mm SMT Footprint
- +4.75Vdc Supply Voltage
- -20°C to +85°C Temp. Range
- Low Phase Noise
- Tape & Reel Packaging
- Fully compliant to RoHS Directive 2002/95/EC

DESCRIPTION

The CTS VCO3060 is a single band high performance SMT VCO. It's low phase noise makes it the ideal choice for any wireless telecommunications system.


- See WWW.CTSCORP.COM for product patent status.

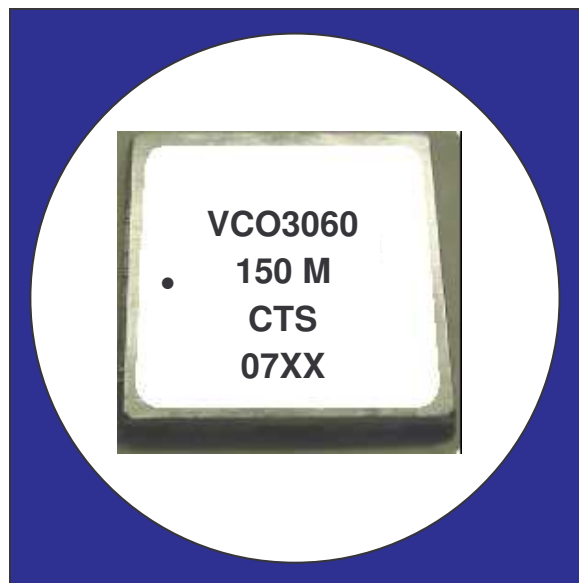

ELECTRICAL SPECIFICATIONS

Parameter	Conditions & Remarks	Min	Typical	Max	Unit
Operating Frequency	F_{OUT}	150	-	200	MHz
Supply Voltage	V_{CC}	4.5	4.75	5	Vdc
Supply Current	I_{CC}	-	-	13	mA
Operating Temperature Range	T_{OP}	-20	-	+85	°C
Storage Temperature Range	T_{STG}	-30	-	+85	°C
Tuning Voltage Range	V_T	0.5	-	4.5	Vdc
Tuning Sensitivity		13	17	21	MHz/V
Power Output		0	3	6	dBm
Pushing		-1	-	1	MHz/V
Pulling	(12dB return loss all phases)	-1	-	1	MHz p-p
Output Impedance		-	50	-	Ohms
Input Impedance		-	100	-	MOhms
Harmonics		-	-	-15	dBc
Spurious Response		-	-	-80	dBc
Phase Noise	10kHz	-	-102	-99	dBc/Hz
	100kHz	-	-	-120	dBc/Hz
	1MHz	-	-142	-139	dBc/Hz

MECHANICAL SPECIFICATIONS:

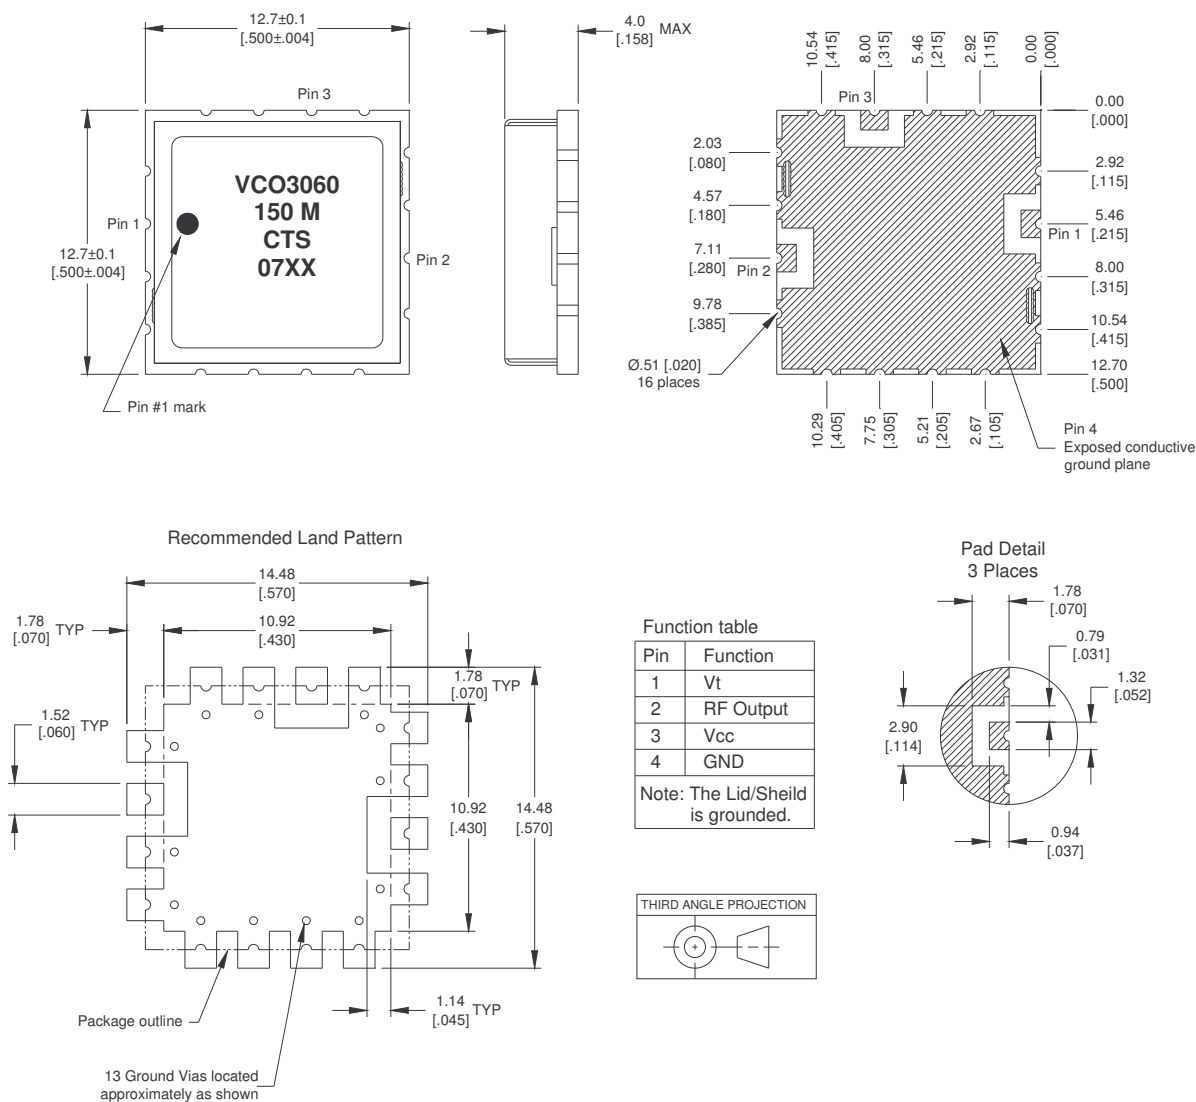


All dimensions are in MM [Inches].

All dimensions are nominal unless otherwise specified.

Lead Termination Finish: Gold Flash, <10 micro inch, over Ni plated Cu.

Tape & Reel Information:

Tape width 24 mm, pitch 16 mm, as per EIA 481-2, 1000 units max per 330 mm reel.

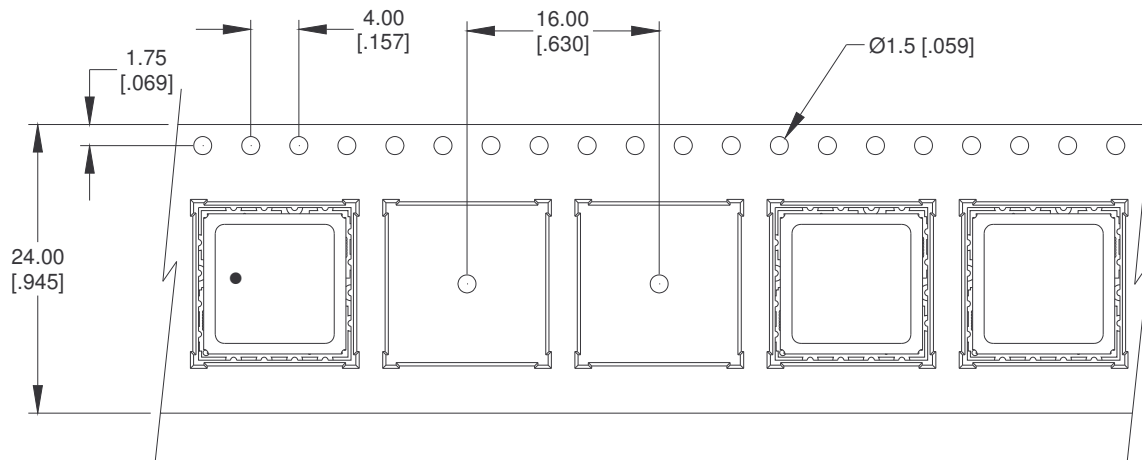

All dimensions are in MM [INCHES].

All dimensions are Nominal

STANDARD ENVIRONMENTAL LIMITS:

This product is capable of operating within the following environmental conditions:

Operating Temperature: -20 to +85 °C.

Storage Temperature: -30 to +85 °C.

Humidity: 85% Relative humidity max @ 50°C.

Solder Reflow Conditions: Device is capable of withstanding reflow of 260 degrees C for 10 seconds maximum.

Atmospheric Pressure: 730 to 780 mm Hg.

Moisture Sensitivity: MSL 1

RoHS: This device is fully compliant to RoHS Directive 2002/95/EC