

Surface Mount Matching Pad

ALMP-5075+ ALMP-5075

50/75Ω

DC to 3000 MHz


Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Input Power	0.25W

Pin Connections

50 OHM	2
75 OHM	6
GROUND	1,3,4,5,7,8,9,10


Outline Drawing

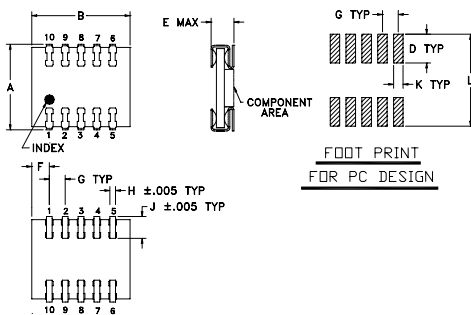

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H	J	K	L	wt
.27	.31	--	.090	.080	.055	.050	.018	.074	.030	.290	grams
6.86	7.87	--	2.29	2.03	1.40	1.27	0.46	1.88	0.76	7.37	0.3

Demo Board MCL P/N: TB-25 Suggested PCB Layout (PL-211)

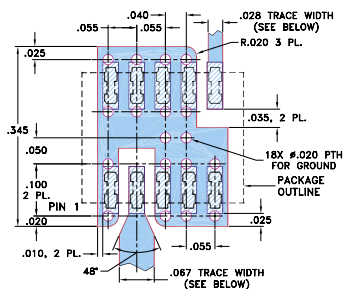

- NOTE: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .030" ± .002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
 - DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Features

- excellent flatness, ±0.1 dB typ.
- excellent return loss, 1.2:1 typ.
- wideband coverage, DC to 3000 MHz
- aqueous washable
- low cost

Applications

- 50 to 75 OHM wideband impedance matching



CASE STYLE: CB518
PRICE: \$7.95 ea. QTY. (1-9)

+ RoHS compliant in accordance with EU Directive (2002/95/EC)



The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.

Electrical Specifications


FREQ. (MHz)	ATTENUATION (dB) Flatness Max.			VSWR (:1) Max.			POWER (W)
	DC-100 MHz	100-1000 MHz	1000-3000 MHz	DC-100 MHz	100-1000 MHz	1000-3000 MHz	
$f_L - f_U$	Nom.						
DC-3000	5.7±0.2	0.2	0.4	0.4	1.06	1.4	1.45

Typical Performance Data

Frequency (MHz)	Attenuation (dB)	VSWR (:1)	
		50 Ω	75 Ω
0.03	5.73	1.00	1.01
0.10	5.73	1.00	1.01
1.00	5.73	1.00	1.01
70.00	5.74	1.00	1.01
150.00	5.76	1.00	1.03
300.00	5.77	1.00	1.06
600.00	5.86	1.02	1.12
1400.00	5.90	1.05	1.27
2000.00	5.84	1.06	1.27
3000.00	5.68	1.10	1.14

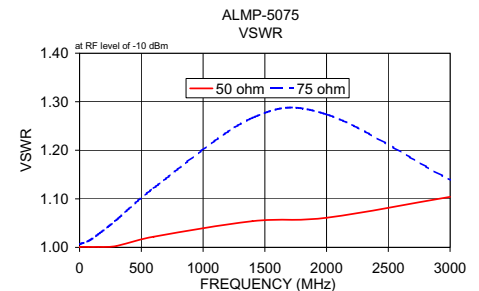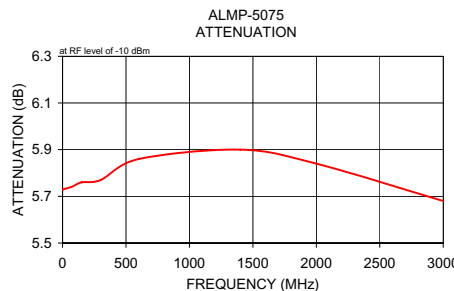

electrical schematic

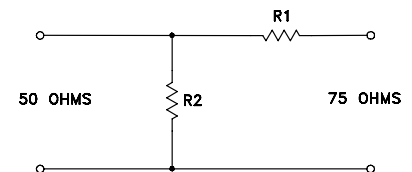

Mini-Circuits®
ISO 9001 ISO 14001 CERTIFIED

ALL NEW
minicircuits.com

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

RF/IF MICROWAVE COMPONENTS

REV. B
M102713
ED-7340/2
ALMP-5075
DJ/TD/CP
070316