

CHARACTERISTICS:

DISPLAY CONTENT: 192 × 64 DOTS

LCD TYPE: STN Y/G、STN BLUE、FSTN

LED BACKLIGHT: Y/G、WHITE


CONTROLLER: KS0108 OR EQUAL

OPERATING TEMPERATURE: NORMAL(0~50℃); WIDE(-20~70℃)

POWER SUPPLY: 5.0V

VIEWING ANGLE: 6H; 12H

DIMENSIONS/DISPLAY CONTENT

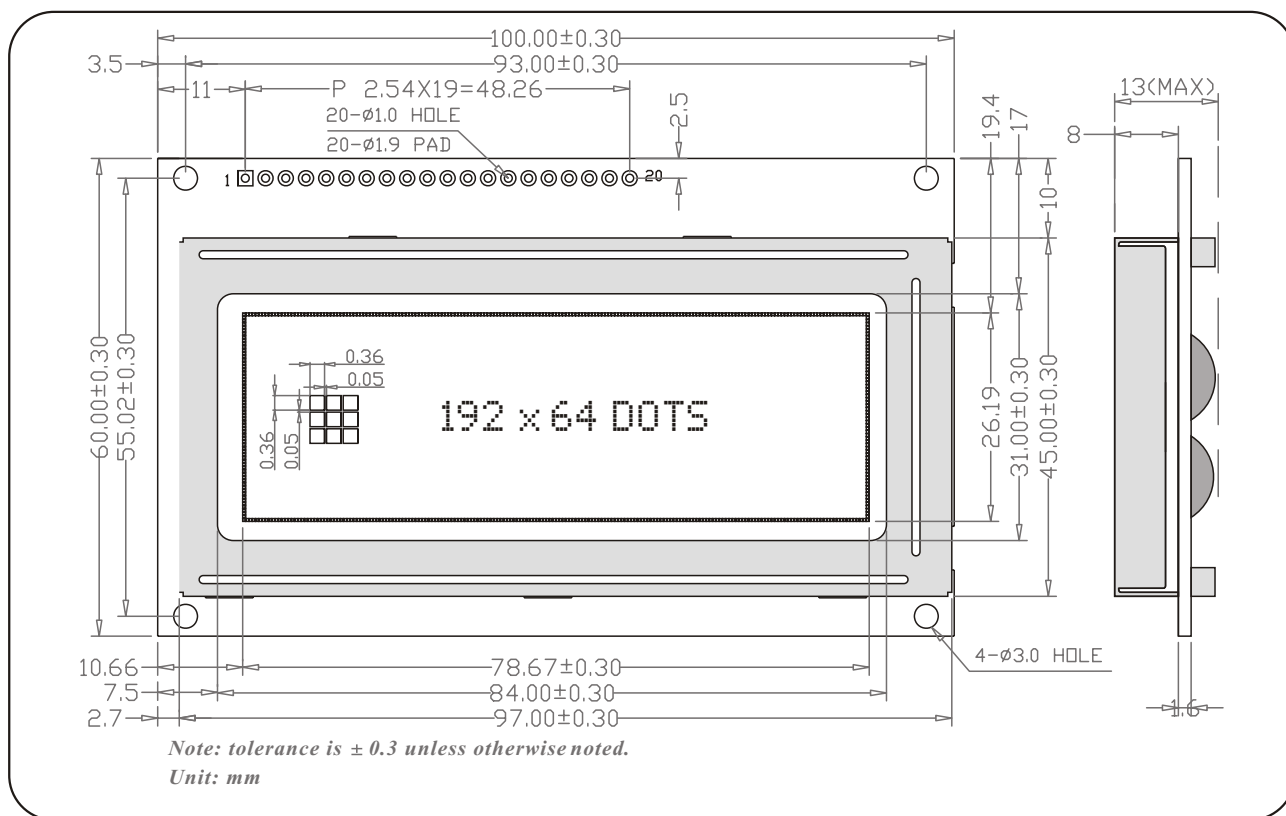

PIN CONFIGURATION

1	2	3	4	5	6	7	8	9	10
DB7	DB6	DB5	DB4	DB3	DB2	DB1	DB0	E	R/W
11	12	13	14	15	16	17	18	19	20
A0	V0	VDD	VSS	CS2	CS1	VEE	RST	LED A	LED K

LIMIT PARAMETER (Ta=25℃)

Parameter	Symbol	Standard Values		Unit
		Min.	Max	
Supply Voltage	VDD-VSS	0	7.0	V
LCD Voltage	VDD-V0	0	17	
Input Voltage	V1	0	VDD	

ELECTRONIC PARAMETER

Parameter		Symbol	Standard Values			Unit
			Min.	Typ.	Max	
Voltage	Logic	VDD-VSS	4.75	5.0	5.25	V
	LCD	VDD-V0	7.0	9.0	17	V
Current	Logic	IDD	-	2.5	-	mA
	LCD	IEE	-	2.0	-	mA
LCD Drive Voltage(25°C)			-	9.0	-	V
Input Voltage	H	VIH	0.7VDD	-	VDD	V
	L	VIL	0	-	0.3VDD	V

APPLICATION CIRCUIT

