

## **SPECIFICATIONS**

Electrical Ratings	25mA @ 50VDC		
Electrical Life	1,000,000 cycles typical		
Contact Resistance	< 25 mΩ initial		
Actuation Force	150 +/- 50gF		
Dielectric Strength	1500Vrms min		
Insulation Resistance	> 100MΩ min		
Operating Temperature	-40°C to 85°C		
Storage Temperature	-40°C to 85°C		




Сар	ABS	
Housing	6/6 Nylon	
Contacts	Copper Alloy, Gold over Nickel Plated	
Terminals	Copper Alloy, Silver Plated	



# **ORDERING INFORMATION**


	1111				
1. Series: NC	NC		Α	3	
2. Cover Style: A B C D E					
3. Cover Color:  1 = White  2 = Black  3 = Red  4 = Yellow  5 = Green					
4. Caps:	046	007	Сар	Colors:	
Blank = No Cap C11 C12 C13 C14 C15*	C16 C17* C18 C19 C22 C26	C27 C28	** Ca	e Cap Options for color av ps available with C & E ac 5 & C17 fit only "E" actuat	tuators only

### **DIMENSIONS**

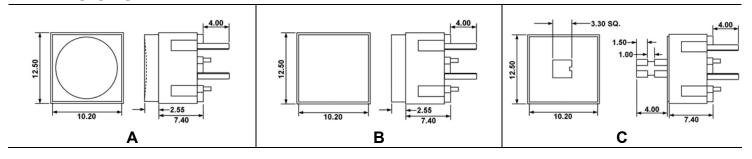





#### **DIMENSIONS**

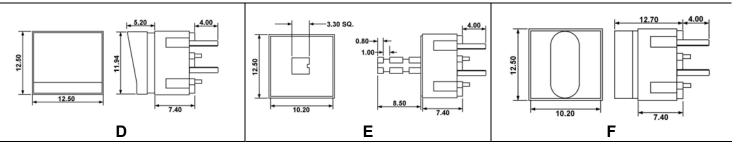


### **SCHEMATIC & PC LAYOUT**







# **CAP OPTIONS** ← Only available with C & E cover styles




Contact Factory for other available colors



C12\_ 1 = White, 2 = Black, 3 = Red, 9 = Gray Contact Factory for other available colors




C13\_ 1 = White, 2 = Black, 3 = Red, 9 = Gray Contact Factory for other available colors



1 = White, 2 = Black, 3 = Red, 9 = Gray Contact Factory for other available colors



C15\_ For "E" actuator only 2 = Black, 0 = Clear Contact Factory for other available colors



C16  $1 = White, 2 = Black, \overline{3} = Red, 7 = Blue$ Contact Factory for other available colors







1 = White, 2 = Black, 3 = Red, 8 = Dark Gray Contact Factory for other available colors





## **CAP OPTIONS** ← Only available with C & E cover styles

