

isc Silicon NPN Power Transistor

2SC3528

DESCRIPTION



- Low Collector Saturation Voltage
- High Collector Current
- Good Linearity of h_{FE}

APPLICATIONS

- Designed for switching regulator and high voltage switching applications.

ABSOLUTE MAXIMUM RATINGS($T_a=25^{\circ}C$)

SYMBOL	PARAMETER	VALUE	UNIT
V_{CBO}	Collector-Base Voltage	500	V
V_{CEO}	Collector-Emitter Voltage	400	V
V_{EBO}	Emitter-Base voltage	7	V
I_C	Collector Current-Continuous	20	A
I_B	Base Current-Continuous	6	A
P_C	Collector Power Dissipation @ $T_C=25^{\circ}C$	125	W
	Collector Power Dissipation @ $T_a=25^{\circ}C$	3	
T_J	Junction Temperature	150	$^{\circ}C$
T_{stg}	Storage Temperature Range	-55~150	$^{\circ}C$

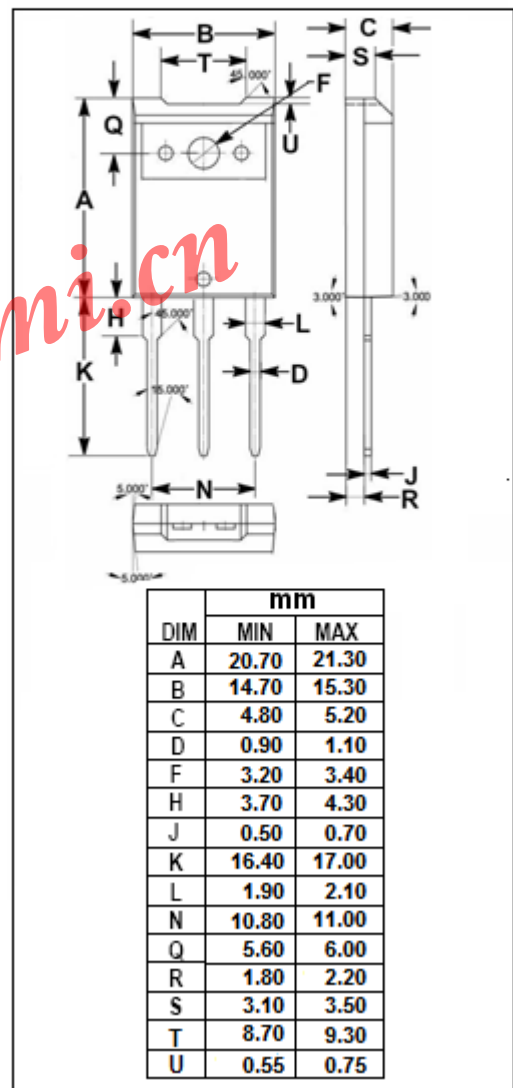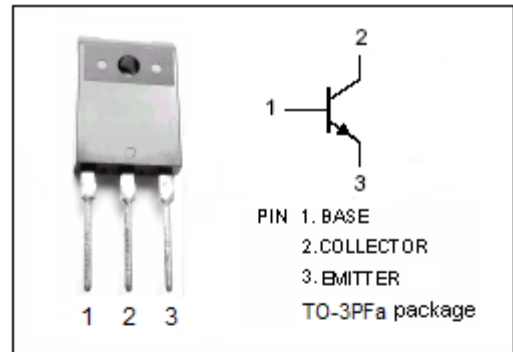

isc Silicon NPN Power Transistor

2SC3528

ELECTRICAL CHARACTERISTICS

 $T_C=25^\circ\text{C}$ unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
$V_{CEO(SUS)}$	Collector-Emitter Sustaining Voltage	$I_C=0.5\text{A}$; $L=25\text{mH}$	400			V
$V_{CE(sat)}$	Collector-Emitter Saturation Voltage	$I_C=10\text{A}$; $I_B=2\text{A}$			1.0	V
$V_{BE(sat)}$	Base-Emitter Saturation Voltage	$I_C=10\text{A}$; $I_B=2\text{A}$			1.5	V
I_{CBO}	Collector Cutoff Current	$V_{CB}=500\text{V}$; $I_E=0$			100	μA
I_{EBO}	Emitter Cutoff Current	$V_{EB}=7\text{V}$; $I_C=0$			100	μA
h_{FE-1}	DC Current Gain	$I_C=2\text{A}$; $V_{CE}=5\text{V}$	15			
h_{FE-2}	DC Current Gain	$I_C=10\text{A}$; $V_{CE}=5\text{V}$	10			
f_T	Current-Gain—Bandwidth Product	$I_C=1\text{A}$; $V_{CE}=10\text{V}$; $f=1\text{MHz}$		15		MHz

Switching times

t_{on}	Turn-On Time	$I_C=10\text{A}$; $I_{B1}=2.0\text{A}$, $I_{B2}=-2.0\text{A}$; $V_{CC}=125\text{V}$			1.0	μs
t_{stg}	Storage Time				2.5	μs
t_f	Fall Time				1.0	μs