




LHC RHC

HIGH VOLTAGE DIFFUSED SILICON RECTIFIERS

- SMALL SIZE MOLDED PACKAGE
- PRV 8,000 TO 40,000 VOLTS
- FAST RECOVERY (RHC SERIES)
- LOW LEAKAGE

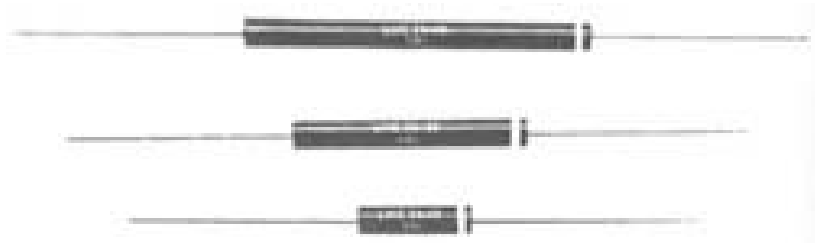

EDI Type No.	Peak Reverse Voltage PRV (Volts)	Max . Fwd. Volta ge Drop at 25 °C And I _o VF (Vol ts)	Case Style
Avg. Fwd. Current, I _o at 50°C 25mA			
LHC25-8	8,000	30	A
-10	10,0 00	30	A
-12	12,0 00	30	A
-15	15,0 00	60	B
-20	20,0 00	60	B
-25	25,000	60	B
-30	30,0 00	90	C
-35	35,0 00	90	C
-40	40,0 00	90	C
RHC25-8	8,000	30	A
-10	10,0 00	30	A
-12	12,0 00	30	A
-15	15,0 00	60	B
-20	20,0 00	60	B
-25	25,0 00	60	B
-30	30,0 00	90	C
-35	35,0 00	90	C
-40	40,0 00	90	C

ELECTRICAL CHARACTERISTICS (at T _A =25 °C Unless Otherwise Specified)	LHC SERIES STANDARD RECOVERY
Max. DC Reverse Current @ PRV and 25 °C, I _R	1 μA
Max. DC Reverse Current@ PRV and 100 °C, I _R	40 μA
Ambient Operating Temperature Range, T _A	-55 °C to +150°C
Storage Temperature Range, T _{STG}	-55 °C to +150°C
Max. One-Half Cycle Surge Current, I _{FM} (Surge)@ 60Hz	3 Amps

ELECTRICAL CHARACTERISTICS (at T _A =25 °C Unless Otherwise Specified)	RHC SERIES FAST RECOVERY
Max. DC Reverse Current @ PRV and 25 °C, I _R	1 μA
Max. DC Reverse Current@ PRV and 100 °C, I _R	60 μA
Max. Reverse Recovery Time , t _{rr} (Fig.4)	100 nanosec
Ambient Operating Temperature Range, T _A	-55 °C to +125°C
Storage Temperature Range, T _{STG}	-55 °C to +150°C
Max. One-Half Cycle Surge Current, I _{FM} (Surge)@ 60Hz	3 Amps

NOTES:

1. Maximum lead and terminal temperature for soldering, 3/8 inch from case, 5 seconds at 250 °C.
2. If operated over 10,000 v/inch in length, devices should be immersed in oil or re-encapsulated.

EDI reserves the right to change these specifications at any time without notice.

FIG.1

NON-REPETITIVE SURGE CURRENT RATINGS

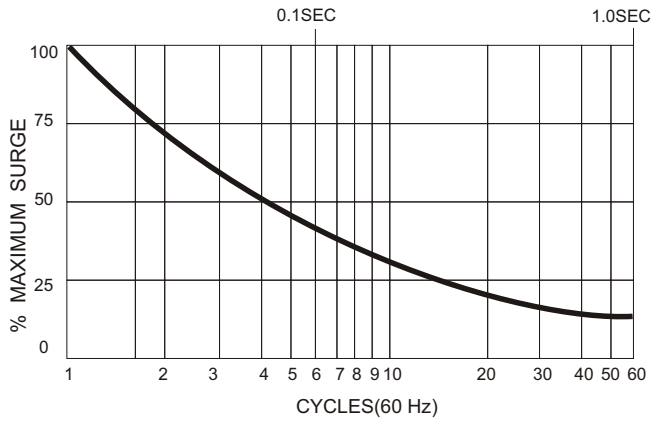


FIG.2

OUTPUT CURRENT vs AMBIENT TEMPERATURE


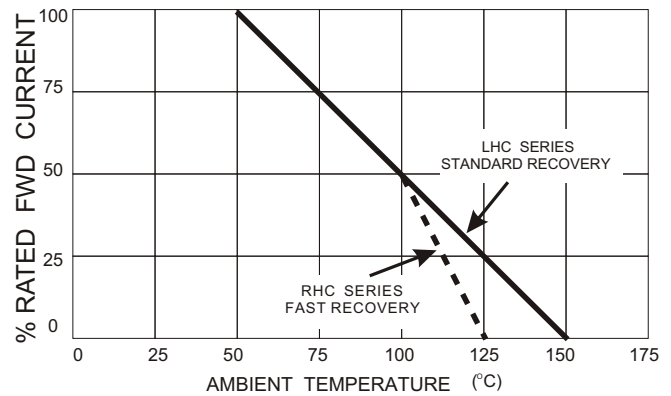



FIG.3
PACKAGE STYLE

CASE STYLE A

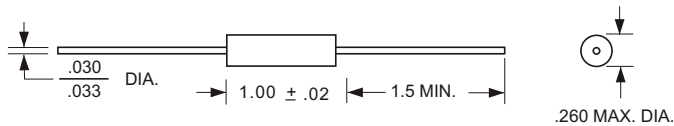

ALL DIMENSIONS
IN INCHES

CASE STYLE B

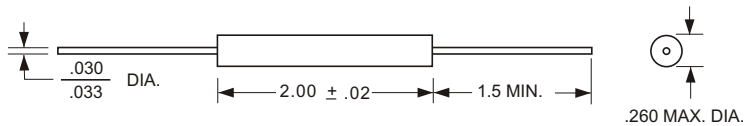

CASE STYLE C



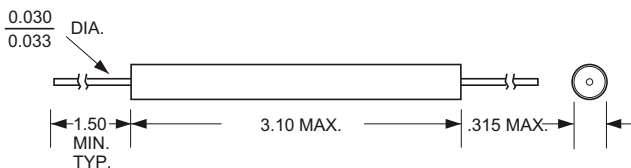


FIG.4

RECOVERY WAVE FORM

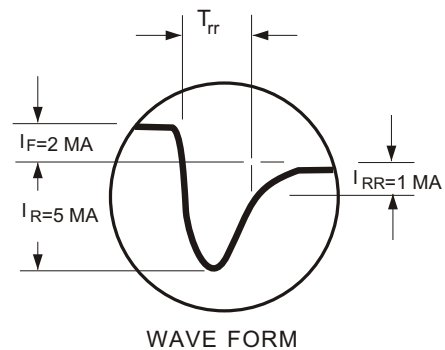

RECOVERY TEST CIRCUIT

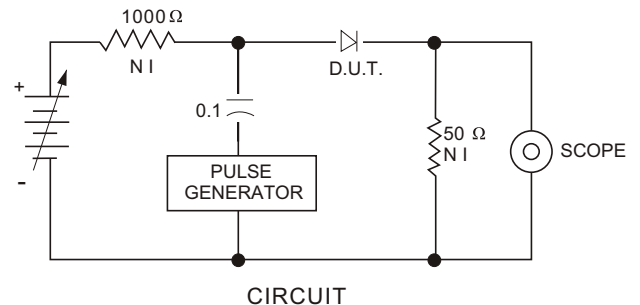

ELECTRONIC DEVICES, INC. DESIGNERS AND MANUFACTURERS OF SOLID STATE DEVICES SINCE 1951.

21 GRAY OAKS AVENUE * YONKERS, NEW YORK 10710 914-965-4400 * FAX 914-965-5531 * 1-800-678-0828

e-mail: sales@edidiodes.com * website: <http://www.edidiodes.com>