
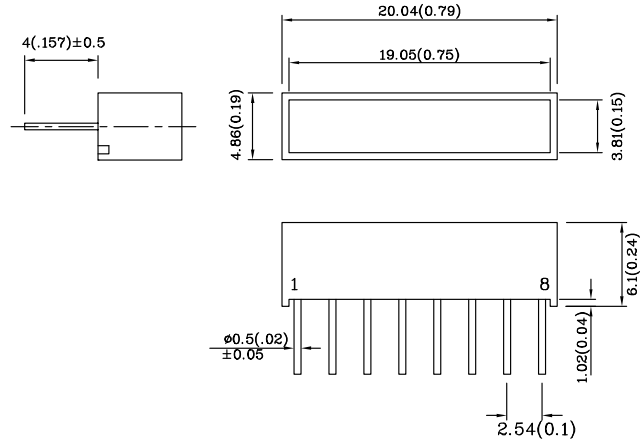


**Features**

- UNIFORM LIGHT EMITTING AREA.
- LOW CURRENT OPERATION.
- EASILY MOUNTED ON P.C. BOARDS.
- FLUSH MOUNTABLE.
- CAN BE USED WITH PANELS AND LEGEND MOUNTS.
- EXCELLENT ON/OFF CONTRAST.
- RoHS COMPLIANT.




Notes:

1. All dimensions are in millimeters (inches).
2. Tolerance is  $\pm 0.25(0.01)$ " unless otherwise noted.
3. Specifications are subject to change without notice.





| Absolute Maximum Ratings<br>(TA=25°C)                          |                       | MG<br>(GaP) | Unit |
|----------------------------------------------------------------|-----------------------|-------------|------|
| Reverse Voltage                                                | VR                    | 5           | V    |
| Forward Current                                                | IF                    | 25          | mA   |
| Forward Current (Peak)<br>1/10 Duty Cycle<br>0.1ms Pulse Width | iFS                   | 140         | mA   |
| Power Dissipation                                              | PT                    | 62.5        | mW   |
| Operating Temperature                                          | TA                    | -40 ~ +85   | °C   |
| Storage Temperature                                            | Tstg                  | -40 ~ +85   |      |
| Lead Solder Temperature<br>[2mm Below Package Base]            | 260°C For 3-5 Seconds |             |      |

| Operating Characteristics<br>(TA=25°C)                          |                 | MG<br>(GaP) | Unit |
|-----------------------------------------------------------------|-----------------|-------------|------|
| Forward Voltage (Typ.)<br>(IF=20mA)                             | VF              | 2.2         | V    |
| Forward Voltage (Max.)<br>(IF=20mA)                             | VF              | 2.5         | V    |
| Reverse Current (Max.)<br>(VR=5V)                               | IR              | 10          | uA   |
| Wavelength Of Peak<br>Emission (Typ.)<br>(IF=20mA)              | $\lambda P$     | 565         | nm   |
| Wavelength Of Dominant<br>Emission (Typ.)<br>(IF=20mA)          | $\lambda D$     | 568         | nm   |
| Spectral Line Full Width<br>At Half-Maximum (Typ.)<br>(IF=20mA) | $\Delta\lambda$ | 30          | nm   |
| Capacitance (Typ.)<br>(VF=0V, f=1MHz)                           | C               | 15          | pF   |


| Part Number | Emitting Color | Emitting Material | Lens-color     | Luminous Intensity<br>(IF=20mA)<br>mcd |      | Wavelength<br>nm<br>$\lambda P$ |
|-------------|----------------|-------------------|----------------|----------------------------------------|------|---------------------------------|
|             |                |                   |                | min.                                   | typ. |                                 |
| EMG2550D    | Green          | GaP               | Green Diffused | 18                                     | 69   | 565                             |

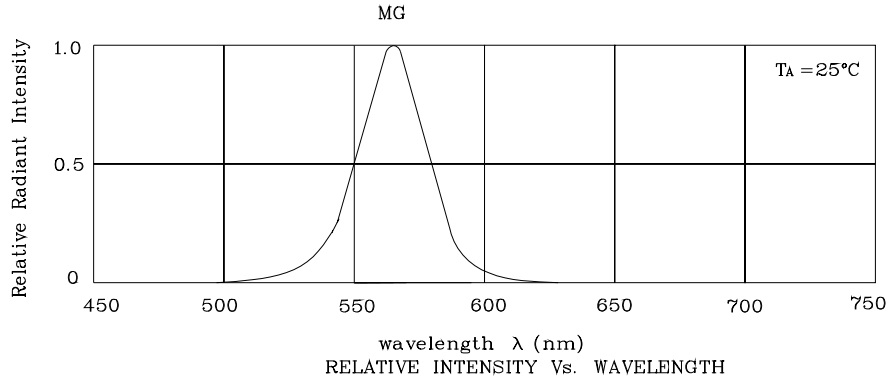

❖ MG

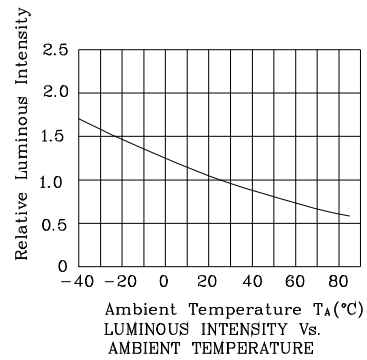

Wave Soldering Profile For Lead-free Through-hole LED.

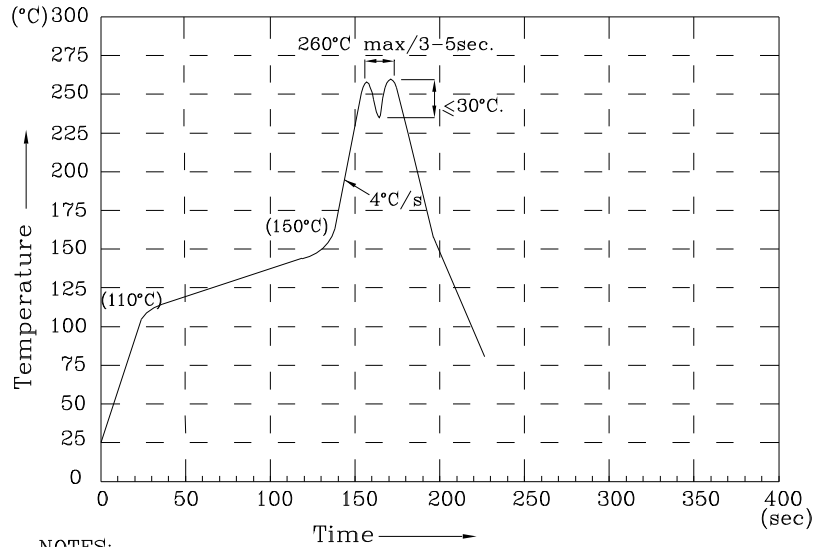

NOTES:

- 1.Recommend the wave temperature 245°C~260°C.The maximum soldering temperature should be less than 260°C.
- 2.Do not apply stress on epoxy resins when temperature is over 85 degree°C.
- 3.The soldering profile apply to the lead free soldering (Sn/Cu/Ag alloy).
- 4.No more than once.

Remarks:

If special sorting is required (e.g. binning based on forward voltage, luminous intensity / luminous flux or wavelength), the typical accuracy of the sorting process is as follows:


1. Wavelength: +/-1nm
2. Luminous Intensity / Luminous Flux: +/-15%
3. Forward Voltage: +/-0.1V

Note: Accuracy may depend on the sorting parameters.




**PACKING & LABEL SPECIFICATIONS**

**EMG2550D**

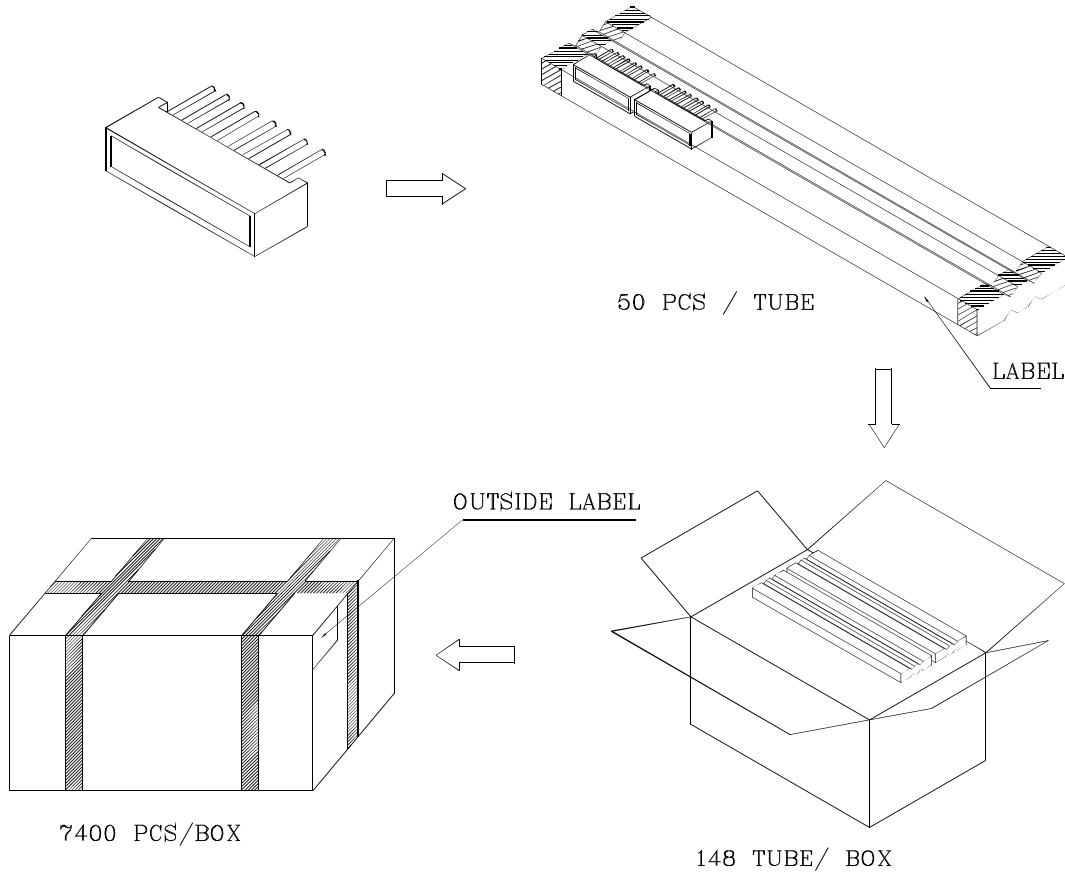

Inside LABEL Paste On The IC-tube

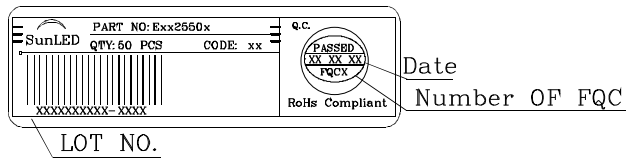

Outside LABEL Paste On The Box

