



CHENMKO ENTERPRISE CO.,LTD

SURFACE MOUNT GLASS PASSIVATED SUPER FAST SILICON RECTIFIER

VOLTAGE RANGE 50 - 1000 Volts CURRENT 3.0 Amperes

**UBM31PT
THRU
UBM38PT**

Lead free devices

FEATURES

- * For surface mounted applications
- * Low profile package
- * Built-in strain relief
- * Superfast recovery times for high efficiency
- * Metallurgically bonded construction
- * Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- * Glass passivated junction
- * High temperature soldering guaranteed : 260°C/10 seconds at terminals

MECHANICAL DATA


Case: JEDEC SMB molded plastic
Terminals: Solder plated, solderable per MIL-STD-750, Method 2026
Polarity: Indicated by cathode band
Weight: 0.003 ounces, 0.093 gram

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.
 Single phase, half wave, 60 Hz, resistive or inductive load.
 For capacitive load, derate current by 20%.



SMB

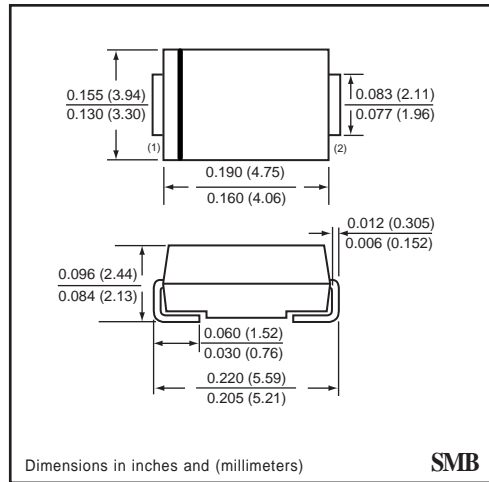

SMB

MAXIMUM RATINGS (At TA = 25°C unless otherwise noted)

RATINGS	SYMBOL	UBM31PT	UBM32PT	UBM33PT	UBM34PT	UBM35PT	UBM36PT	UBM37PT	UBM38PT	UNITS	
Maximum Recurrent Peak Reverse Voltage	V _{RRM}	50	100	200	300	400	600	800	1000	Volts	
Maximum RMS Voltage	V _{RMS}	35	70	140	210	280	420	560	700	Volts	
Maximum DC Blocking Voltage	V _{DC}	50	100	200	300	400	600	800	1000	Volts	
Maximum Average Forward Rectified Current T _L = 90°C	I _O	3.0								Amps	
Peak Forward Surge Current 8.3 ms single half sine-wave superimposed on rated load (JEDEC method)	I _{FSM}	100								Amps	
Typical Junction Capacitance (Note 1)	C _J	50					30				pF
Operating and Storage Temperature Range	T _J , T _{STG}	-65 to +150								°C	

ELECTRICAL CHARACTERISTICS (At TA = 25°C unless otherwise noted)

CHARACTERISTICS	SYMBOL	UBM31PT	UBM32PT	UBM33PT	UBM34PT	UBM35PT	UBM36PT	UBM37PT	UBM38PT	UNITS	
Maximum Instantaneous Forward Voltage at 3.0 A DC	V _F	0.95			1.27		1.75			Volts	
Maximum DC Reverse Current at Rated DC Blocking Voltage	@ TA = 25°C	10								uAmps	
	@ TA = 100°C	200								uAmps	
Maximum Reverse Recovery Time (Note 2)	t _{rr}	35					45				nSec

NOTES : 1. Measured at 1.0 MHz and applied reverse voltage of 4.0 volts
 2. Test Conditions : I_F = 0.5 A, I_R = -1.0 A, I_{RR} = -0.25 A

2002-5

RATING CHARACTERISTIC CURVES (UBM31PT THRU UBM38PT)

FIG. 1 - TEST CIRCUIT DIAGRAM AND REVERSE RECOVERY TIME CHARACTERISTIC

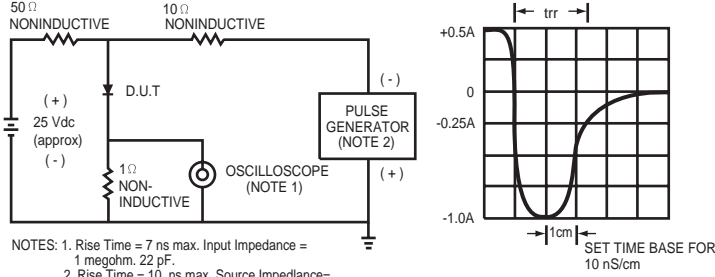


FIG. 2 - TYPICAL FORWARD CURRENT DERATING CURVE




FIG. 3 - TYPICAL REVERSE CHARACTERISTICS

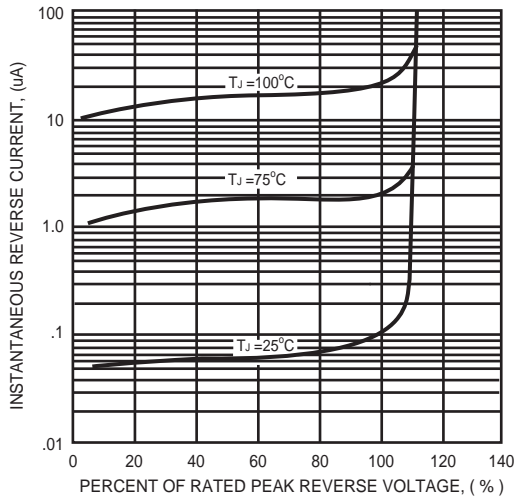


FIG. 4 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

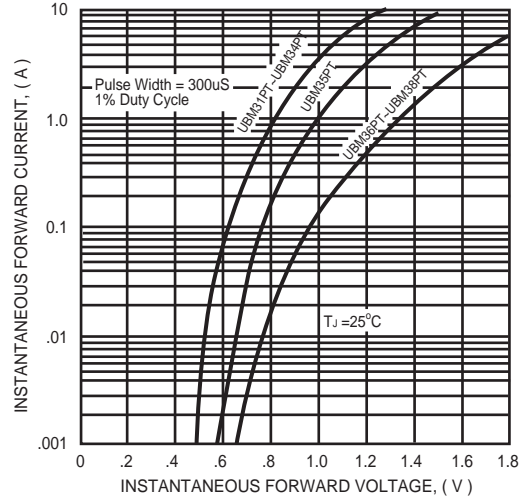


FIG. 5 - MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

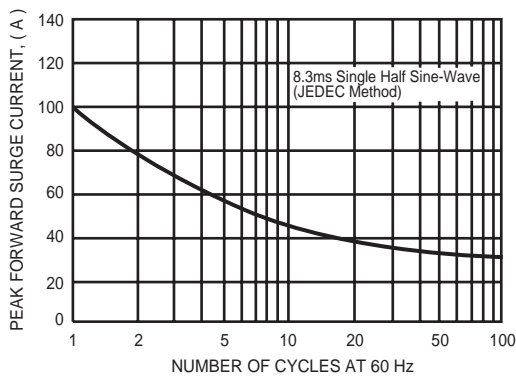


FIG. 6 - TYPICAL JUNCTION CAPACITANCE

