


EC3C

S E R I E S

15 WATT WIDE INPUT DC-DC CONVERTERS

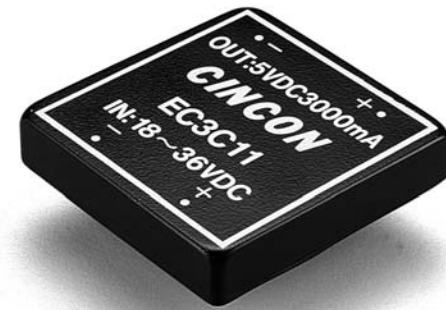

Features

- 15W Isolated Output
- 2:1 Input Range
- Six-Sided Shield
- 200KHz Switching Frequency
- Efficiency to 82%

MODEL NUMBER	INPUT VOLTAGE	OUTPUT VOLTAGE	OUTPUT CURRENT	INPUT CURRENT		% EFF.	CASE
				NO LOAD	FULL LOAD		
EC3C01		5 VDC	3000 mA	30 mA	1660 mA	75	
EC3C02		12 VDC	1250 mA	30 mA	1625 mA	78	
EC3C03		15 VDC	1000 mA	30 mA	1625 mA	78	
EC3C04	9-18 VDC	±12 VDC	±625 mA	35 mA	1620 mA	77	C/S
EC3C05		±15 VDC	±500 mA	35 mA	1620 mA	77	
EC3C06		±5 VDC	±1500 mA	35 mA	1620 mA	77	
EC3C07		3.3 VDC	3000 mA	30 mA	1178 mA	70	
EC3C11		5 VDC	3000 mA	15 mA	812 mA	78	
EC3C12		12 VDC	1250 mA	20 mA	772 mA	81	
EC3C13		15 VDC	1000 mA	20 mA	772 mA	81	
EC3C14	18-36 VDC	±12 VDC	±625 mA	25 mA	780 mA	80	C/S
EC3C15		±15 VDC	±500 mA	25 mA	780 mA	80	
EC3C16		±5 VDC	±1500 mA	25 mA	780 mA	80	
EC3C17		3.3 VDC	3000 mA	15 mA	557 mA	74	
EC3C21		5 VDC	3000 mA	10 mA	390 mA	80	
EC3C22		12 VDC	1250 mA	15 mA	381 mA	82	
EC3C23		15 VDC	1000 mA	15 mA	381 mA	82	
EC3C24	36-72 VDC	±12 VDC	±625 mA	20 mA	386 mA	81	C/S
EC3C25		±15 VDC	±500 mA	20 mA	386 mA	81	
EC3C26		±5 VDC	±1500 mA	20 mA	386 mA	81	
EC3C27		3.3 VDC	3000 mA	20 mA	271 mA	76	

NOTE: 1. Nominal Input Voltage 12, 24 or 48 VDC
2. Alternative pin-out version. To order, suffix a "S" to the standard model number.

Specifications

INPUT SPECIFICATIONS:

Input Voltage Range.....	12V9-18V
	24V18-36V
	48V36-72V
Input Filter.....	PI Type

OUTPUT SPECIFICATIONS:

Voltage Accuracy	
Single Output.....	±1.0% max.
Dual + Output.....	±1.0% max.
Dual - Output.....	±3.0% max.
Voltage Balance Dual Output at Full Load.....	±1.0% max.
Transient Response	
Single 25% Step Load Change.....	<500µ sec.
Dual FL-1/2L ±1% Error Band.....	<500µ sec.
Ripple & Noise 20MHz BW.....	10mV RMS. max. 75mV p-p max.
Temperature Coefficient.....	±0.02%/°C
Short Circuit Protection.....	Indefinite & Current Limit
Line Regulation ¹ Single/Dual Output.....	±0.2% max.
Load Regulation ² Single/Dual Output.....	±1.0% max.

GENERAL SPECIFICATIONS:

Efficiency.....	See Table
Isolation Voltage.....	500 VDC min.
Isolation Resistance.....	10 ⁹ ohms
Switching Frequency.....	200KHz, typ.
Operating Temperature Range.....	-25°C to + 71°C
Case Temperature.....	100°C max.
Cooling.....	Free-Air Convection
Storage Temperature Range.....	-40°C to + 100°C
EMI/RFI.....	Six-Sided Continuous Shield
Dimensions.....	2 x 2 x 0.4 inches (50.8 x 50.8 x 10.2mm)
Case Material.....	Black Coated Copper With Non-Conductive Base
Weight.....	0.57g

NOTE:

1. Measured From High Line to Low Line
2. Measured From Full Load to 1/4 Full Load
3. Determine the Correct Fuse Size by Calculating the Maximum DC Current Drain at Low Line Input, Maximum Load and Then Adding 20 to 25% to Get Desired Fuse Size.
4. Alternative Pin Configuration Suffix "S"

CASE C

All Dimensions in Inches(mm)
Tolerance .xx= ±0.04, .xxx= ±0.10

