




- Designed for Broadcom BCM 6020
- Operating Temperature : 0° C to 70°C
- 1500 Vrms Isolation
- Thru-Hole Package


Electrical Parameters @ 25° C

Description	Passband Frequency	Insertion Loss (dB Max.)	Return Loss (dB Min.)	Stopband Frequency	Attenuation (dB Min.)
Low Pass	300 KHz - 2.5 MHz	-2.0	-10	3.88 MHz - 10 MHz	-55
High Pass	3.88 MHz - 10 MHz	-2.0	-10	300 KHz - 2.5 MHz	-55

Schematic

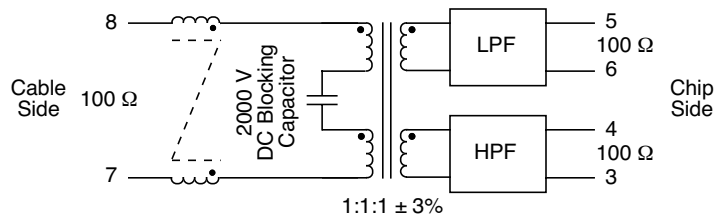

Package

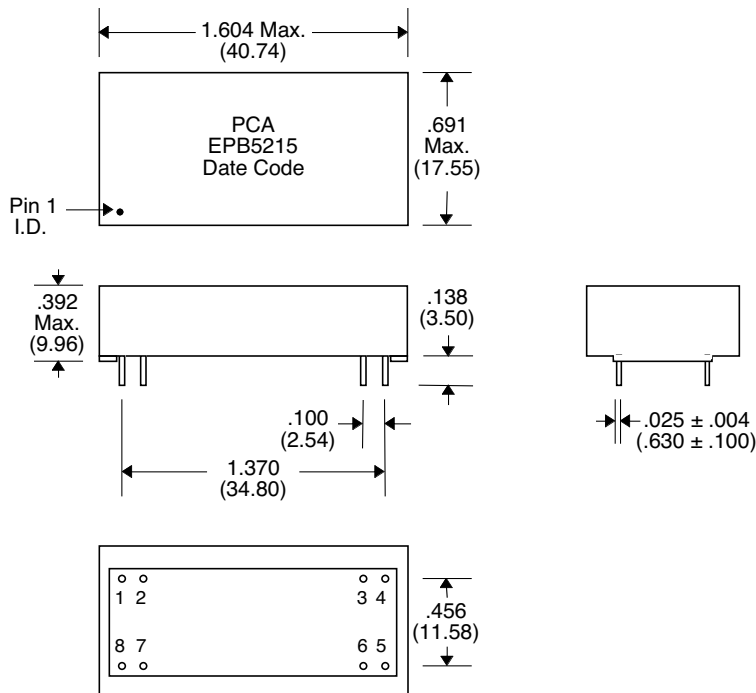

Unless Otherwise Specified Dimensions are in Inches /mm ± .010 / .25