

# RF AMPLIFIER

## MODEL *TM9312*

Available as: TM9312, 4 Pin TO-8 (T4)  
 TN9312, 4 Pin Surface Mount (SM3)  
 FP9312, 4 Pin Flatpack (FP4)  
 BX9312, Connectorized Housing (H1)

### Features

- Low Noise Figure: <3 dB Typical
- Medium Gain: 16.5 dB Typical
- Operating Temp. - 55 °C to +85 °C
- Environmental Screening Available

### Specifications

CHARACTERISTIC	TYPICAL Ta= 25 °C	MIN/MAX Ta = -55 °C to +85 °C
Frequency	5 - 1000 MHz	5 - 1000 MHz
Gain (dB)	16.5	15.0 Min.
Power @ 1 dB Comp. (dBm)	+7	+5 Min.
Reverse Isolation (dB)	-18	-17 Max.
VSWR In	<1.5:1	2.0:1 Max.
Out	<1.75:1	2.0:1 Max.
Noise Figure (dB)	<3.0	4.0 Max.
Power Vdc	+15	+15
mA	18	20 Max.

Note: Care should always be taken to effectively ground the case of each unit.


### Typical Intermodulation Performance at 25 ° C

Second Order Harmonic Intercept Point.....+30 dBm (Typ.)  
 Second Order Two Tone Intercept Point.....+24 dBm (Typ.)  
 Third Order Two Tone Intercept Point.....+20 dBm (Typ.)

### Maximum Ratings

Ambient Operating Temperature ..... -55°C to + 100 °C  
 Storage Temperature ..... -62°C to + 125 °C  
 Case Temperature ..... + 125 °C  
 DC Voltage ..... + 18 Volts  
 Continuous RF Input Power ..... + 13 dBm  
 Short Term RF Input Power..... 50 Milliwatts (1 Minute Max.)  
 Maximum Peak Power..... 0.5 Watt (3 µsec Max.)

### Typical Performance Data

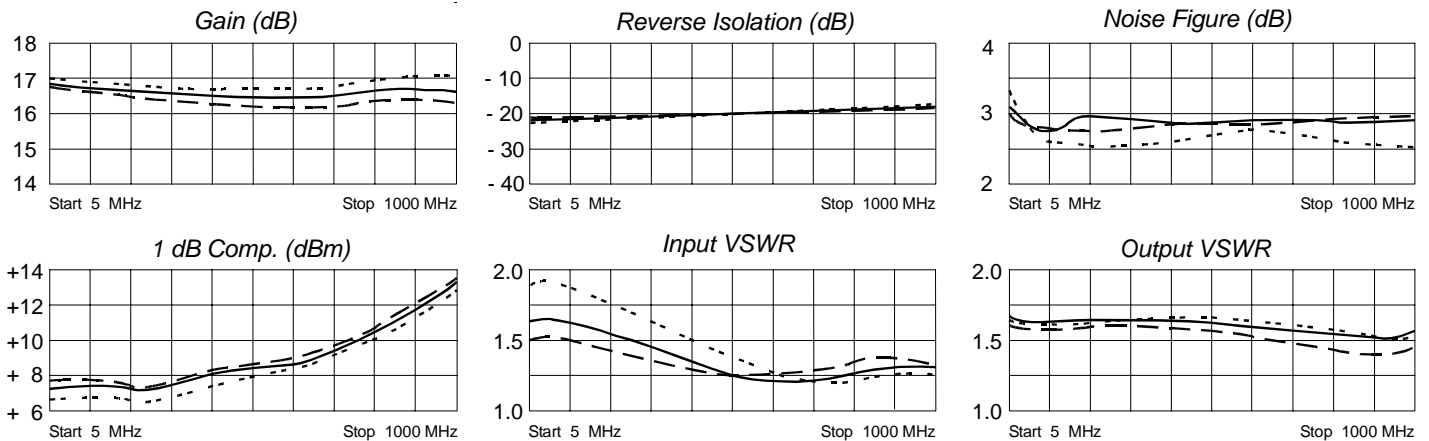

Legend ——— + 25 °C    - - - - + 85 °C    ······ -55 °C

### Linear S-Parameters

FREQ. MHz	S11		S21		S12		S22	
	Mag	Deg	Mag	Deg	Mag	Deg	Mag	Deg
5	.24	-174	7.30	-176	.08	4	.26	-176
50	.24	174	6.90	171	.09	- 0	.25	169
100	.23	166	6.88	162	.08	0	.25	160
200	.22	151	6.83	143	.09	- 3	.25	138
400	.15	132	6.69	108	.09	-12	.24	101
600	.10	145	6.65	71	.10	-20	.24	69
800	.13	155	6.78	33	.11	-34	.22	43
1000	.14	120	6.80	- 13	.12	-48	.23	39



Spectrum Microwave · 2144 Franklin Drive N.E. · Palm Bay, Florida 32905 · PH (888) 553-7531 · Fax (888) 553-7532 08/05/04

www.spectrummicrowave.com Spectrum Microwave (Europe) · 2707 Black Lake Place · Philadelphia, Pa. 19154 · PH (215) 464-4000 · Fax (215) 464-4001