


Schematic:

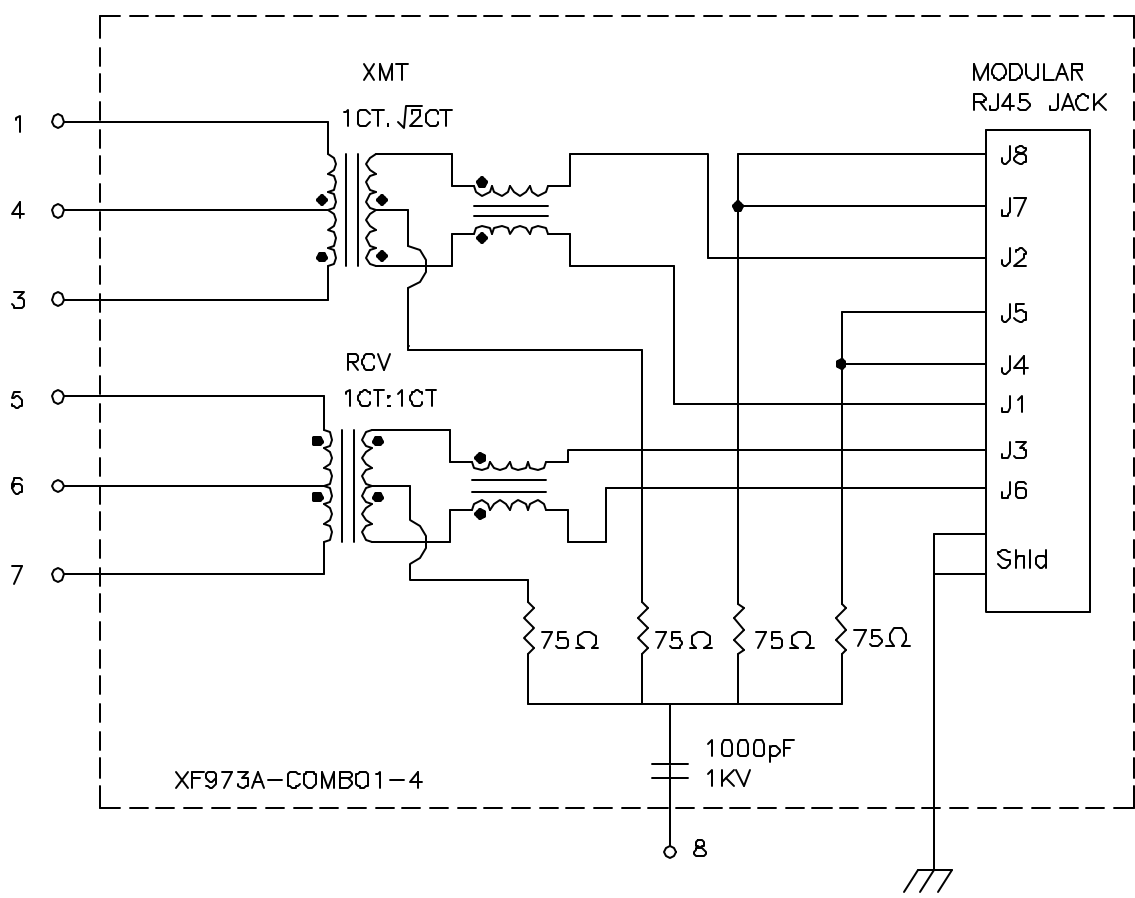

Electrical Specifications: @25°C

ISOLATION: 1500 Vrms (Input to Output)
TURN RATIO: 1CT:1CT±3% (RCV)
TURN RATIO: 1CT:√2CT±3% (XMT)
CABLE SIDE OCL: 350uH Minimum @100KHz 100mV 8mADC
Cw/w: 27pF Typical @100KHz 100mV
RX RETURN LOSS: @30MHz -20dB Typ
@80MHz -15dB Typ
INSERTION LOSS (0.3-100MHz): -1.0dB Maximum

UNLESS OTHERWISE SPECIFIED TOLERANCES: .xxx ±0.010 Dimensions in Inch	Title: SINGLE PORT COMBO	
	P/N: XF973A-COMBO1-4	REV. A
	DWN.	廖玉坤
	CHK.	李清儿
	APP.	BW
SHEET 1 OF 2		Sep-27-00