
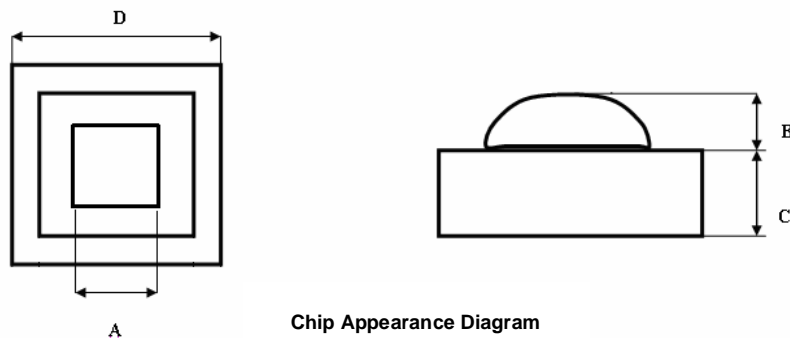


2CW035XXXYQ SERIES ZENER DIODE CHIPS FOR GLASS SEAL
DESCRIPTION

- Ø 2CW035XXXYQ series are low-power zener diode chips for glass seal that fabricated in silicon epitaxial planar technology.
- Ø The series can provide three kinds of precision voltage chips for different regulator voltage.
- Ø The chip thickness is 140µm. The top electrode material is Ag bump, and the back-side electrode material is Ag.
- Ø Chip size: 0.35 X 0.35 (mm)².


2CW035XXXYQ CHIP TOPOGRAPHY
2CW035XXXYQ APPEARANCE

Chip Appearance Diagram

Parameter	Symbol	Min.	Type	Max.	Unit
Chip Size	D	280	--	320	µm
Chip Thickness	C	120	--	160	µm
Bump Size	A	215	--	262	µm
Bump Height	B	25	--	60	µm
Scribe Line Width	/	--	40	--	µm

ORDERING INFORMATION

Series	Specification
2CW035XXXYQ-2	2% tolerance
2CW035XXXYQ-5	5% tolerance
2CW035XXXYQ	Normal, Approximately 5% tolerance

ABSOLUTE MAXIMUM RATINGS

Characteristics	Symbol	Test conditions	Value	Unit
Junction Temperature	T _j	----	175	°C
Storage Temperature	T _{stg}	----	-50~+175	°C

ELECTRICAL CHARACTERISTICS (For packaged diodes, $T_{amb}=25^{\circ}\text{C}$)

1. 2CW035XXX1Q-2 series(2% tolerance)

Type	*Working Voltage @ $I_z=5\text{mA}$	*Dynamic resistance		Reverse leakage current@ $T_{amb}=25^{\circ}\text{C}@VR$	
	$V_z(\text{V})$	$Z_{zk}(\Omega)$ @ $I_{zk}=1\text{mA}$	$Z_{zt}(\Omega)$ @ $I_{zt}=5\text{mA}$	$I_R(\mu\text{A})$	$VR(\text{V})$
	$V_{min}-V_{max}$	max	max	max	
2CW035036YQ-2	3.53~3.67	600	85	2	1.0
2CW035039YQ-2	3.82~3.98	600	85	2	1.0
2CW035043YQ-2	4.21~4.39	600	80	1	1.0
2CW035047YQ-2	4.61~4.79	600	70	0.5	1.0
2CW035051YQ-2	5.00~5.20	550	50	0.1	1.0
2CW035056YQ-2	5.49~5.71	450	30	0.1	1.0
2CW035062YQ-2	6.08~6.32	200	10	0.1	2.0
2CW035068YQ-2	6.66~6.94	150	8	0.1	3.0
2CW035075YQ-2	7.35~7.65	50	7	0.1	5.0
2CW035082YQ-2	8.04~8.36	50	7	0.1	6.1
2CW035091YQ-2	8.92~9.28	50	10	0.1	6.8
2CW035100YQ-2	9.80~10.20	70	15	0.1	7.5
2CW035110YQ-2	10.78~11.22	70	20	0.1	8.2
2CW035120YQ-2	11.76~12.24	90	20	0.1	9.0
2CW035130YQ-2	12.74~13.26	110	26	0.1	9.7
2CW035150YQ-2	14.70~15.30	110	30	0.1	11
2CW035160YQ-2	15.68~16.32	170	40	0.1	12
2CW035180YQ-2	17.64~18.36	170	50	0.1	14
2CW035200YQ-2	19.60~20.40	220	55	0.1	15
2CW035220YQ-2	21.56~22.44	220	55	0.1	17
2CW035240YQ-2	23.52~24.48	220	80	0.1	18
2CW035270YQ-2	26.46~27.54	220	80	0.1	20
2CW035300YQ-2	29.40~30.60	220	80	0.1	22
2CW035330YQ-2	32.34~33.66	220	80	0.1	24
2CW035360YQ-2	35.28~36.72	220	80	0.1	27
2CW035390YQ-2	38.22~39.78	500	90	0.1	29
2CW035430YQ-2	42.14~43.86	600	90	0.1	32
2CW035470YQ-2	46.06~47.94	700	110	0.1	35
2CW035510YQ-2	49.98~52.02	700	125	0.1	38
2CW035560YQ-2	54.88~57.12	1000	135	0.1	42
2CW035620YQ-2	60.76~63.24	1000	150	0.1	46.5
2CW035680YQ-2	66.64~69.36	1000	200	0.1	51
2CW035750YQ-2	73.5~76.5	1500	250	0.1	56

2. 2CW035XXX1Q-5 series(5% tolerance)

Type	*Working Voltage@Iz =5mA	*Dynamic resistance		Reverse leakage current @ Tamb=25°C@ VR	
	Vz(V)	Zzk(Ω)@ Izk=1mA	Zzt(Ω)@ Izt=5mA	IR(μA)	VR(V)
	Vmin-Vmax	max	max	max	
2CW035020YQ-5	1.9-2.1	600	85	100	1.0
2CW035022YQ-5	2.09-2.31	600	85	75	1.0
2CW035024YQ-5	2.28~2.52	600	85	50	1.0
2CW035027YQ-5	2.57~2.84	600	85	10	1.0
2CW035030YQ-5	2.85~3.15	600	85	4	1.0
2CW035033YQ-5	3.14~3.47	600	85	2	1.0
2CW035036YQ-5	3.42~3.78	600	85	2	1.0
2CW035039YQ-5	3.71~4.10	600	85	2	1.0
2CW035043YQ-5	4.09~4.52	600	80	1	1.0
2CW035047YQ-5	4.47~4.94	600	70	0.5	1.0
2CW035051YQ-5	4.85~5.36	550	50	0.1	1.0
2CW035056YQ-5	5.32~5.88	450	30	0.1	1.0
2CW035062YQ-5	5.89~6.51	200	10	0.1	2.0
2CW035068YQ-5	6.46~7.14	150	8	0.1	3.0
2CW035075YQ-5	7.13~7.88	50	7	0.1	5.0
2CW035082YQ-5	7.79~8.61	50	7	0.1	6.1
2CW035091YQ-5	8.65~9.56	50	10	0.1	6.8
2CW035100YQ-5	9.50~10.50	70	15	0.1	7.5
2CW035110YQ-5	10.45~11.55	70	20	0.1	8.2
2CW035120YQ-5	11.40~12.60	90	20	0.1	9.0
2CW035130YQ-5	12.40~13.65	110	26	0.1	9.7
2CW035150YQ-5	14.25~15.60	110	30	0.1	11
2CW035160YQ-5	15.30~16.80	170	40	0.1	12
2CW035180YQ-5	17.10~18.90	170	50	0.1	14
2CW035200YQ-5	19.00~21.00	220	55	0.1	15
2CW035220YQ-5	20.90~23.10	220	55	0.1	17
2CW035240YQ-5	22.80~25.20	220	80	0.1	18
2CW035270YQ-5	25.65~28.35	220	80	0.1	20
2CW035300YQ-5	28.50~31.50	220	80	0.1	22
2CW035330YQ-5	31.35~34.65	220	80	0.1	24
2CW035360YQ-5	34.20~37.80	220	80	0.1	27
2CW035390YQ-5	37.05~40.95	500	90	0.1	29
2CW035430YQ-5	40.85~45.15	600	90	0.1	32
2CW035470YQ-5	44.65~49.35	700	110	0.1	35
2CW035510YQ-5	48.45~53.55	700	125	0.1	38
2CW035560YQ-5	53.2~58.8	1000	135	0.1	42
2CW035620YQ-5	58.9~65.1	1000	150	0.1	46.5
2CW035680YQ-5	64.6~71.4	1000	200	0.1	51
2CW035750YQ-5	71.25~78.75	1500	250	0.1	56

3. 2CW035XXX1Q series (normal)

Type	*Working Voltage@ Iz=5mA	*Dynamic resistance		Reverse leakage current@ Tamb=25°C@ VR	
	Vz(V)	Zzk(Ω)@ Izk=1mA	Zzt(Ω)@ Izt=5mA	IR(μA)	VR(V)
2CW035XXX1Q	Vmin-Vmax	max	max	max	
2CW035020YQ	1.80-2.15	600	85	100	1.0
2CW035022YQ	2.08-2.33	600	85	75	1.0
2CW035024YQ	2.28-2.56	600	85	50	1.0
2CW035027YQ	2.5-2.9	600	85	10	1.0
2CW035030YQ	2.8-3.2	600	85	4	1.0
2CW035033YQ	3.1-3.5	600	85	2	1.0
2CW035036YQ	3.4-3.8	600	85	2	1.0
2CW035039YQ	3.7-4.1	600	85	2	1.0
2CW035043YQ	4.0-4.6	600	80	1	1.0
2CW035047YQ	4.4-5.0	600	70	0.5	1.0
2CW035051YQ	4.8-5.4	550	50	0.1	1.0
2CW035056YQ	5.2-6.0	450	30	0.1	1.0
2CW035062YQ	5.8-6.6	200	10	0.1	2.0
2CW035068YQ	6.4-7.2	150	8	0.1	3.0
2CW035075YQ	7.0-7.9	50	7	0.1	5.0
2CW035082YQ	7.7-8.7	50	7	0.1	6.1
2CW035091YQ	8.5-9.6	50	10	0.1	6.8
2CW035100YQ	9.4-10.6	70	15	0.1	7.5
2CW035110YQ	10.4-11.6	70	20	0.1	8.2
2CW035120YQ	11.4-12.7	90	20	0.1	9.0
2CW035130YQ	12.4-14.1	110	26	0.1	9.7
2CW035150YQ	13.8-15.6	110	30	0.1	11
2CW035160YQ	15.3-17.1	170	40	0.1	12
2CW035180YQ	16.8-19.1	170	50	0.1	14
2CW035200YQ	18.8-21.2	220	55	0.1	15
2CW035220YQ	20.8-23.3	220	55	0.1	17
2CW035240YQ	22.8-25.6	220	80	0.1	18
2CW035270YQ	25.1-28.9	220	80	0.1	20
2CW035300YQ	28.0-32.0	220	80	0.1	22
2CW035330YQ	31.0-35.0	220	80	0.1	24
2CW035360YQ	34.0-38.0	220	80	0.1	27
2CW035390YQ	37.0~41.0	500	90	0.1	29
2CW035430YQ	40.0~46.0	600	90	0.1	32
2CW035470YQ	44.0~50.0	700	110	0.1	35
2CW035510YQ	48.0~54.0	700	125	0.1	38
2CW035560YQ	52.0~60.0	1000	135	0.1	42
2CW035620YQ	58.0~66.0	1000	150	0.1	46.5
2CW035680YQ	64.0~72.0	1000	200	0.1	51
2CW035750YQ	70.0~79.0	1500	250	0.1	56

Forward Voltage VF= 1.0 V Maximum @ IF = 100 mA for all 2CW035XXX1Q series.

*Note: from 39V up to 75V Vz@Iz=2.5mA, Zzt@Iz=2.5mA,Zzk@Iz=0.5mA.