



1. Dimensions:

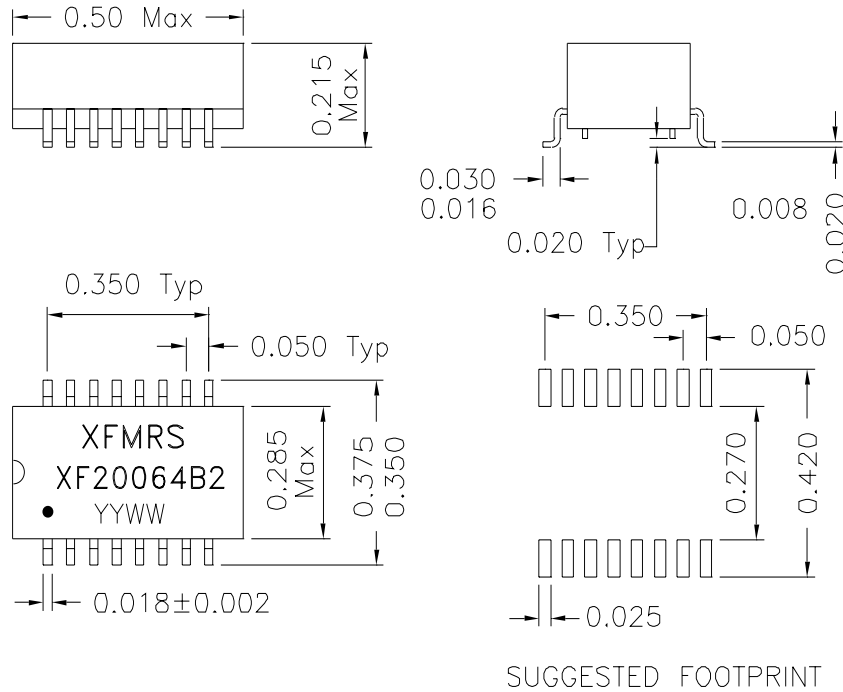

2. Schematic:

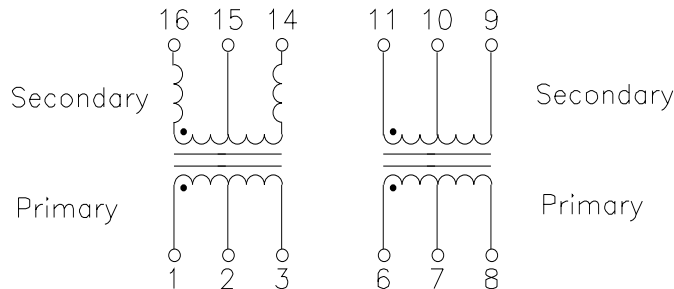

Doc Rev A/1

3. Electrical Specifications:@25°C

Isolation Voltage: 1500 VAC

Turns Ratio: (1-2-3):(16-15-14)=1CT:2CT ±2%

Turns Ratio: (6-7-8):(11-10-9)=1CT:1CT ±2%

PRI OCL: 200uH ±20% @100KHz 50mV

Cw/w: 12pF Maximum @100KHz 50mV (Pri/Sec)

Leakage Inductance: 0.3uH Maximum @100KHz 50mV
@PRI, WITH SEC SHORTED

DCR: 0.30 Ohms Maximum (PIN1-3, PIN11-9, PIN6-8)

DCR: 0.60 Ohms Maximum (PIN16-14)

XFMRS Inc	Title: 10 BASE T ISOLATION MAGNETICS	
	UNLESS OTHERWISE SPECIFIED	P/N: XF20064B2
	TOLERANCES: .xxx ±0.010	REV. A
	Dimensions in Inch	DWN. 李湾儿 Oct-20-99
SHEET 1 OF 1	CHK. 孙悦 Oct-20-99	
	APP. Joe Huff Oct-20-99	