



1. Mechanical Dimensions:

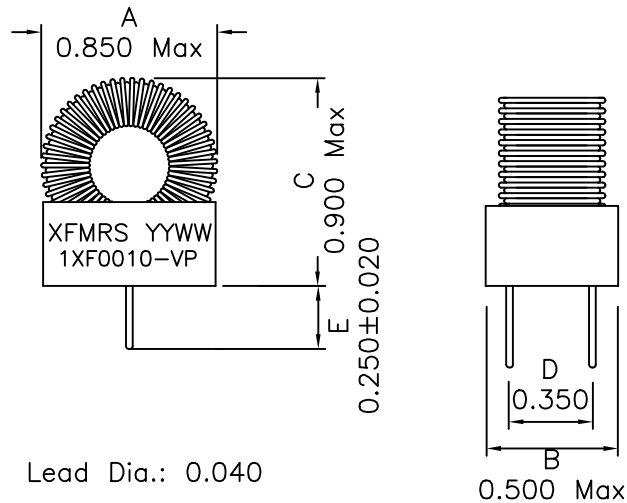

2. Schematic:



3. Electrical Specifications:

Inductance: 10uH ±10% @1.0KHz,1.0V
 CURRENT RATING: 6ADC
 DC Resistance: 0.015 Ohms Max.

Note:

1. Solderability: Leads shall meet MIL-STD-202, Method 208D for solderability.
2. Flammability: UL94V-0,
3. ASTM oxygen index: > 28% ,
4. Temperature rating: 155°C. UL file E151556,
5. Operating Temperature Range: 0°C to +70°C
6. Tinned length is the same as the lead length.

PRELIMINARY

DOC. REV. A/1

XFMRS Inc.	Title: VERTICAL INDUCTOR		
	UNLESS OTHERWISE SPECIFIED	P/N: 1XF0010-VP	REV. A
TOLERANCES:	DWN.	廖玉坤	Dec-26-01
.xxx ±0.010	CHK.	李清儿	Dec-26-01
Dimensions in Inch	APP.	Isaiah M	Dec-26-01
SHEET 1 OF 1			