



# CHENMKO ENTERPRISE CO.,LTD

## SURFACE MOUNT GLASS PASSIVATED HIGH EFFICIENCY SILICON RECTIFIER

VOLTAGE RANGE 50 - 1000 Volts CURRENT 2.0 Ampere

Lead free devices

**UPL21CTPT  
THRU  
UPL28CTPT**



**PROVISIONAL SPEC.**

### FEATURE

- \*Small Surface Mounting Type. (SMP)
- \* Low forward voltage, high current capability
- \* Low leakage current
- \* Glass passivated junction
- \* High temperature soldering guaranteed :  
260°C/10 seconds at terminals

**SMP**

### CIRCUIT

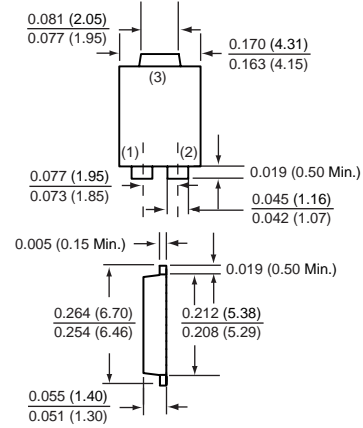

Dimensions in inches and (millimeters)

**SMP**

### MAXIMUM RATINGS ( At TA = 25°C unless otherwise noted )

RATINGS	SYMBOL	UPL21CTPT	UPL22CTPT	UPL23CTPT	UPL24CTPT	UPL25CTPT	UPL26CTPT	UPL27CTPT	UPL28CTPT	UNITS
Maximum Recurrent Peak Reverse Voltage	VRRM	50	100	200	300	400	600	800	1000	Volts
Maximum RMS Voltage	VRMS	35	70	140	210	280	420	560	700	Volts
Maximum DC Blocking Voltage	Vdc	50	100	200	300	400	600	800	1000	Volts
Maximum Average Forward Rectified Current TL = 110°C	Io	2.0								Amps
Peak Forward Surge Current 8.3 ms single half sine-wave superimposed on rated load (JEDEC method)	IFSM	30								Amps
Typical Junction Capacitance (Note 1)	CJ	15				12				pF
Operating and Storage Temperature Range	TJ, TSTG	-65 to +150								°C

### ELECTRICAL CHARACTERISTICS ( At TA = 25°C unless otherwise noted )

CHARACTERISTICS	SYMBOL	UPL21CTPT	UPL22CTPT	UPL23CTPT	UPL24CTPT	UPL25CTPT	UPL26CTPT	UPL27CTPT	UPL28CTPT	UNITS
Maximum Instantaneous Forward Voltage at 1.0 A DC	VF	0.95			1.27		1.75			Volts
Maximum DC Reverse Current at Rated DC Blocking Voltage at TA = 25°C	IR	5.0								uAmps
Maximum Full Load Reverse Current Average, Full Cycle at TA = 55°C		100								uAmps
Maximum Reverse Recovery Time (Note 2)	trr	35				45				nSec

NOTES : 1. Measured at 1.0 MHz and applied reverse voltage of 4.0 volts  
2. Test Conditions : IF = 0.5 A, IR = -1.0 A, IRR = -0.25 A

2004-7

# RATING CHARACTERISTIC CURVES ( UPL21CTPT THRU UPL28CTPT )

FIG. 1 - TEST CIRCUIT DIAGRAM AND REVERSE RECOVERY TIME CHARACTERISTIC

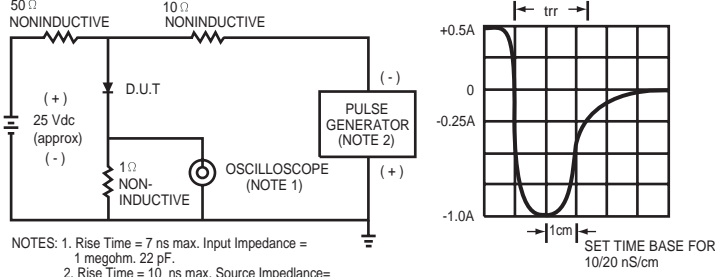


FIG. 2 - TYPICAL FORWARD CURRENT DERATING CURVE




FIG. 3 - TYPICAL REVERSE CHARACTERISTICS

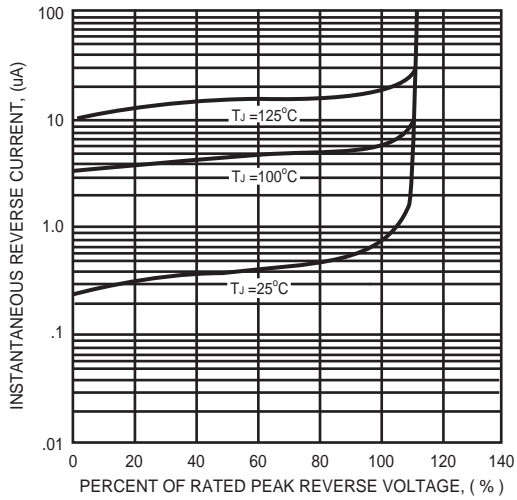


FIG. 4 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

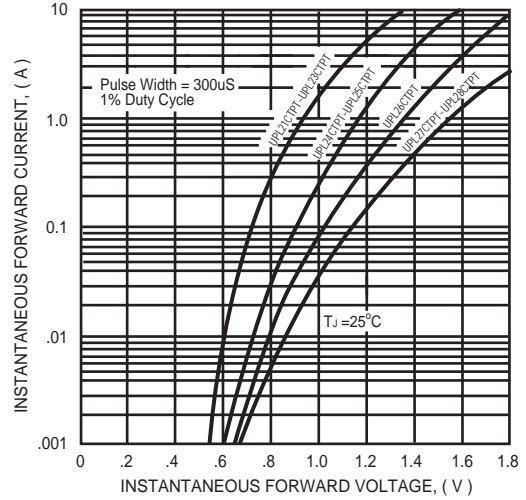


FIG. 5 - MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

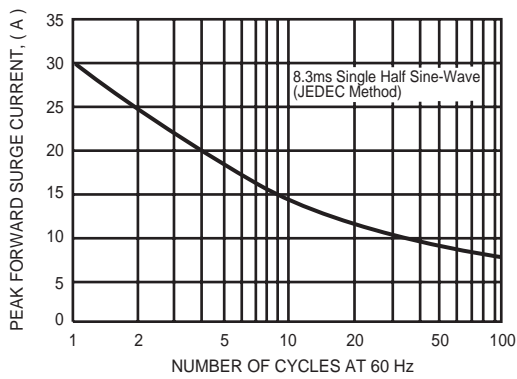


FIG. 6 - TYPICAL JUNCTION CAPACITANCE

