


General data for CP-P11/7-A coil former

| PARAMETER                     | SPECIFICATION   |
|-------------------------------|---|
| Coil former material          | acetal (POM), glass reinforced, flame retardant in accordance with "UL 94-HB"; UL file number E66288(R) |
| Maximum operating temperature | 105 C   |

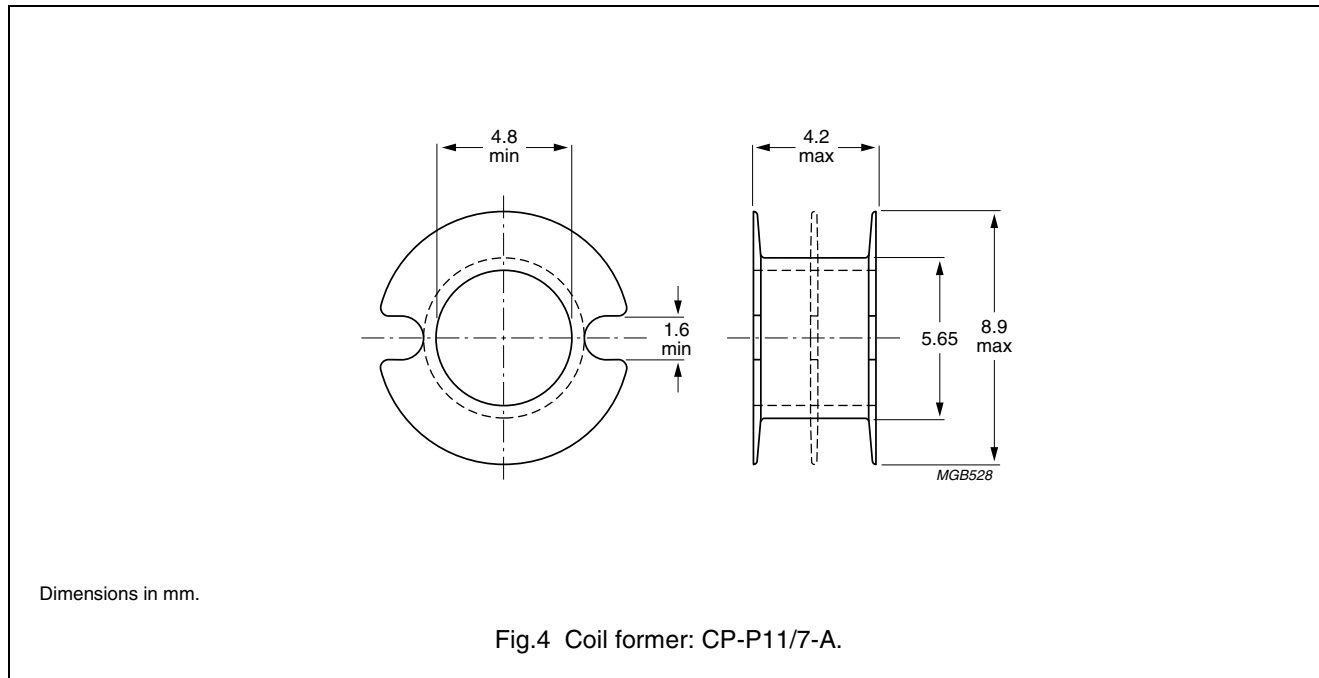

Winding data for CP-P11/7-A coil former

| NUMBER OF SECTIONS | MINIMUM WINDING AREA (mm <sup>2</sup> ) | NOMINAL WINDING WIDTH (mm) | AVERAGE LENGTH OF TURN (mm) | TYPE NUMBER   |
|--------------------|---|----------------------------|-----------------------------|---------------|
| 1                  | 4.6                                     | 3.1                        | 22.6                        | CP-P11/7-1S-A |
| 2                  | 4.0                                     | 3.0                        | 22.7                        | CP-P11/7-2S-A |
| 3                  | 3.52                                    | 2.7                        | 22.7                        | CP-P11/7-3S-A |