

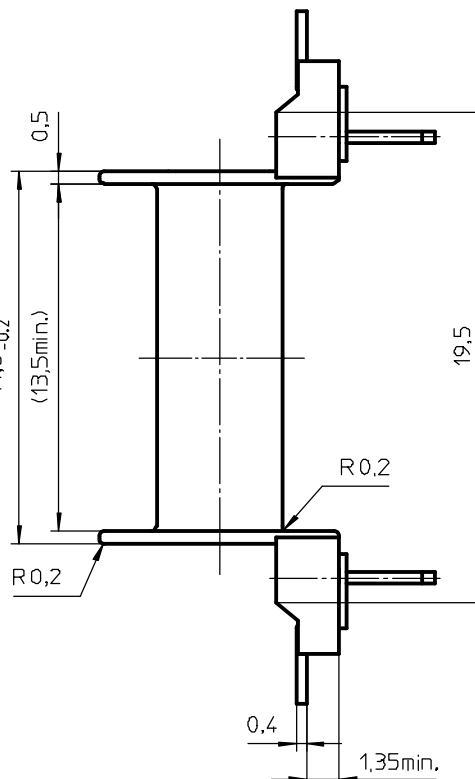


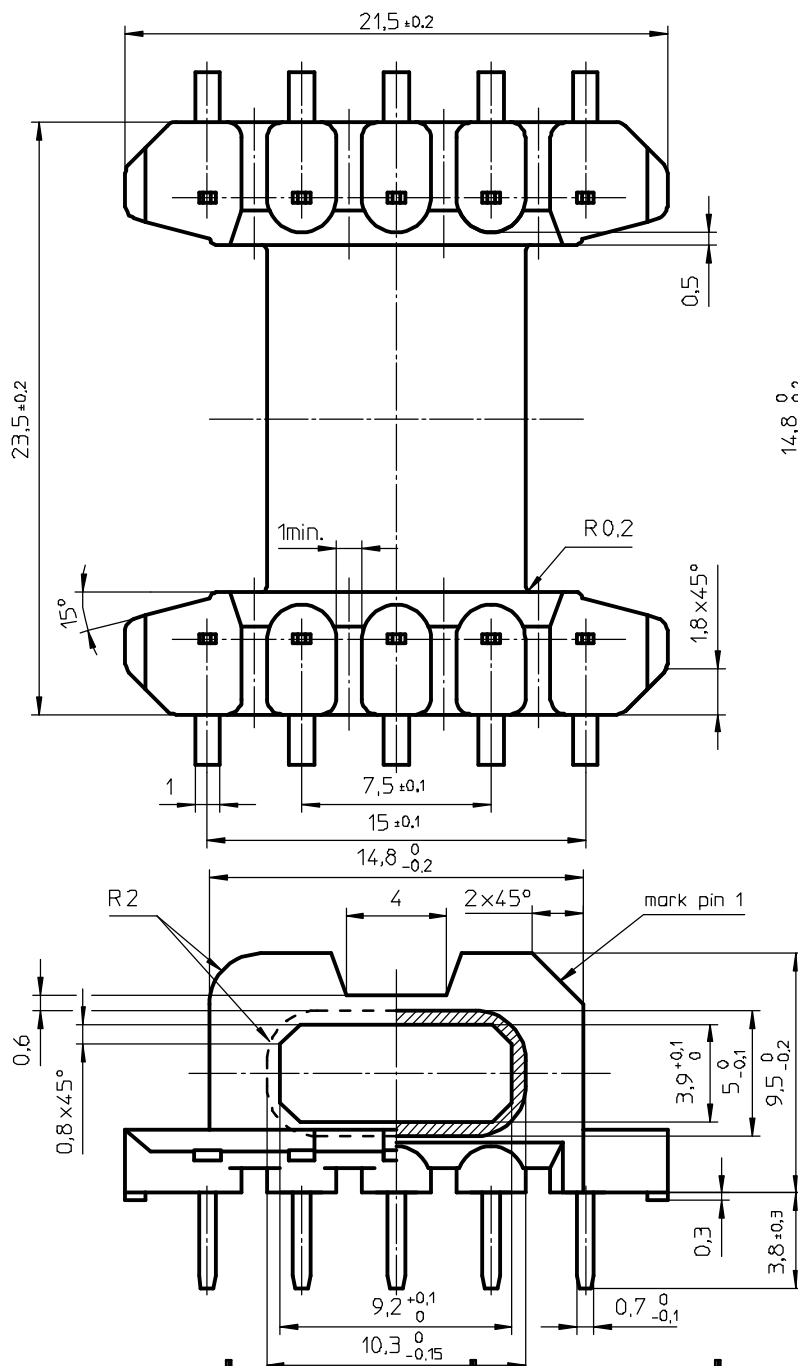

HOLE PATTERN:

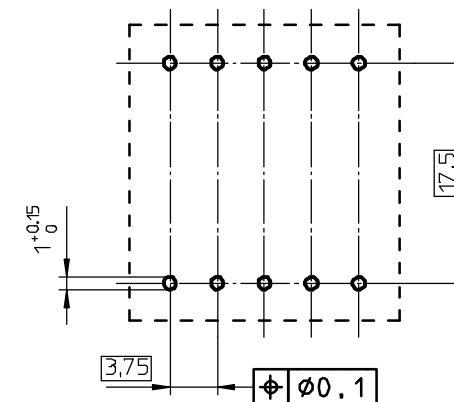

Coil former material:

Sumikasuper (LCP), glass-reinforced.

Pin material:

UL file number: E54705 - UL94V-0.

Max. operating temp.:

CuSn - Ni flash, Sn plated.

Resistance to soldering heat:

acc. to IEC 60085 class F, 155°C.

Salderability:

acc. to IEC 60068-2-20 Part 2, Test Tb, method 1B, 350°C - 3,5sec

Min. winding area:

acc. to IEC 60068-2-20 Part 2, Test Ta, method 1, 235°C - 2sec.

Mean length of turn:

27,7 mm².

34,1 mm.

CLASS NO.		CPH-EFD20-1S-10PD-Z		4322 021 06161		03-02-25	
NAME	M. Veekens	SUPERS	VERV.	001	112	001	069
MPA	CHECK	CONTR.	DAT.	03-02-25	Property of		© FERROXCUBE 2000
						A3	