


PROPOSED PAD ARRANGEMENT

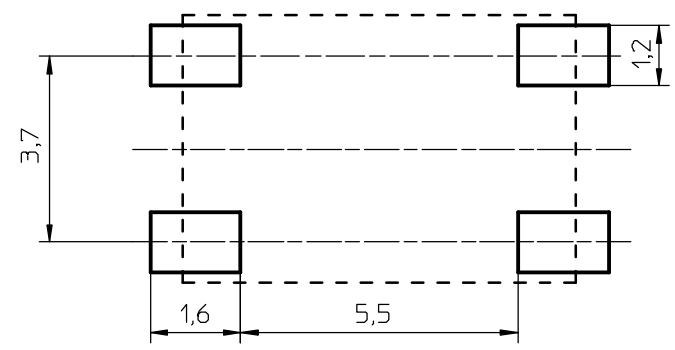

Coil former material: Sumikasuper E4008 (LCP), glass-reinforced.
 UL file number: E54705 - UL94V-0
 Pin material: CuSn - Ni flash, Sn plated.
 Max operating temp: acc. to IEC 60085 class F, 155°C.
 Resistance to soldering heat: acc. to IEC 60068-2-20 Part 2, Test Tb, method 1B, 350°C - 3,5sec.
 Solderability: acc. to IEC 60068-2-20 Part 2, Test Ta, method 1, 235°C - 2sec.
 Min. winding area: 1,5 mm².
 Mean length of turn: 12,6 mm.

CLASS NO.		03-02-20	
CPHS-E5,3/2-1S-4P-Z		4322 021 06001	
NAME MPA	J. Tjon	SUPERS VERV.	1
CHECK CONTR.		DATE	03-02-20
Property of Eigendom van		112 - 001	069
		© FERROXCUBE 2000	