

**SINGLE PHASE HALL EFFECT LATCH WITH LOCKED PROTECTION AH478****General Description**

The AH478 is a single coil Hall sensor with output drivers designed for brush-less DC motor application. This IC consists of one H-bridge driver for motor's coil driving and has automatic lock shutdown and restart function relatively. To avoid coil burning, rotor lock shutdown detection circuit shut down the output driver if the rotor is blocked and then the automatic recovery circuit will try to restart the motor. This function repeats while rotor is blocked. Until the blocking is removed, the motor recovers running normally.

If a magnetic flux density is larger than threshold B_{OP} , the DO is turned to sink and DOB is turned to drive. This output state is held until a magnetic flux density reversal falls below B_{RP} , causing DO to be turned to drive and DOB turned to sink.

This IC is available in TO-95 package.

Features

- On-chip Hall Sensor
- Rotor-locked Shutdown
- Automatically Restart
- Operating Voltage: 3.5 to 18V
- High Output Sourcing/Sinking Capability up to 300mA
- Bi-direction H-type Output Drivers for Single Coil
- Internal Bandgap Regulator for Temperature Compensation
- Low Output Switching Current Noise
- Operating Temperature: -20 to 85°C
- Low Profile TO-95 Package
- ESD Rating: 3000V (Human Body Model)

Applications

- Single Coil Brushless DC Motor
- Single Coil Brushless DC Fan

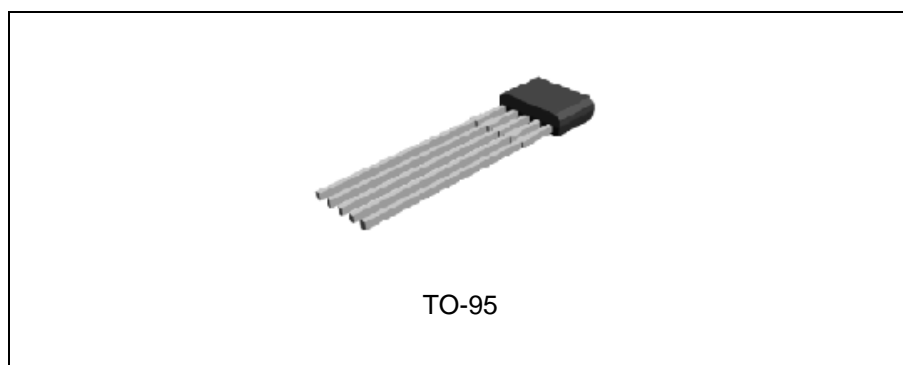


Figure 1. Package Type of AH478

SINGLE PHASE HALL EFFECT LATCH WITH LOCKED PROTECTION AH478

Pin Configuration

Z5 Package
(TO-95)

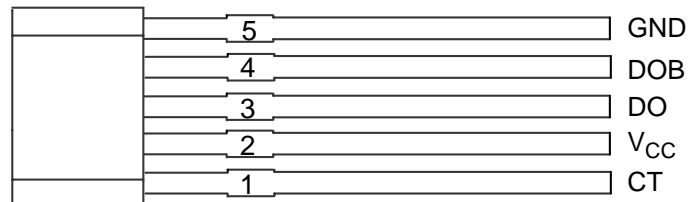


Figure 2. Pin Configuration of AH478 (Front View)

Pin Description

Pin Number	Pin Name	Function
1	CT	Lock and rotation setting capacitor terminal
2	V _{CC}	Supply voltage
3	DO	Output 1
4	DOB	Output 2
5	GND	Ground

SINGLE PHASE HALL EFFECT LATCH WITH LOCKED PROTECTION AH478

Functional Block Diagram


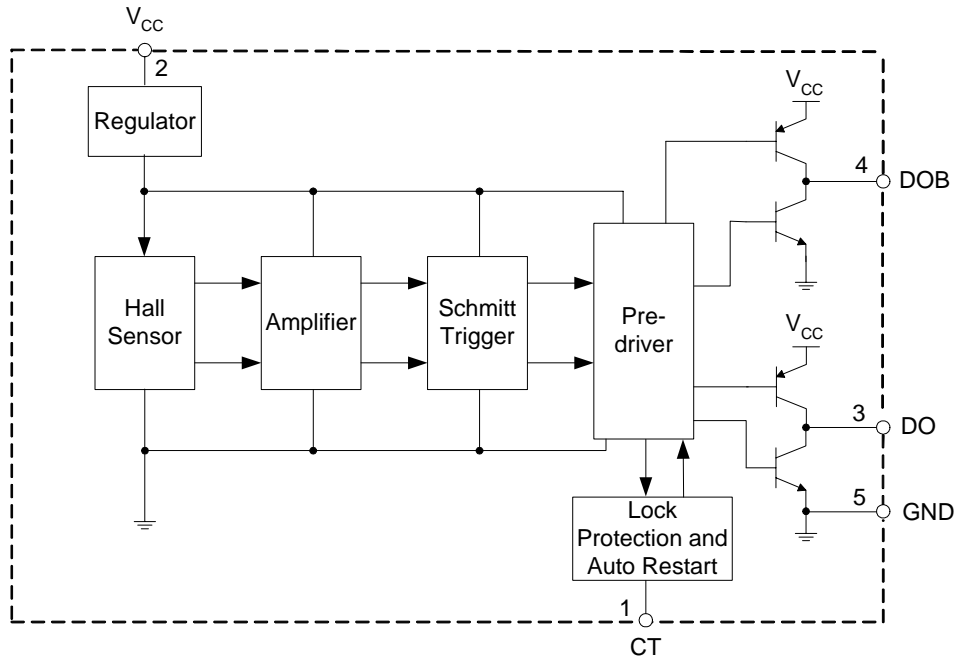


Figure 3. Functional Block Diagram of AH478

Ordering Information

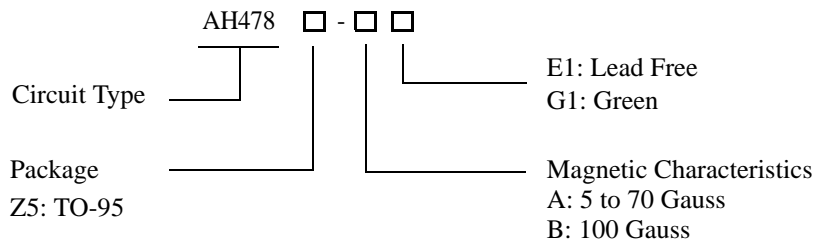

Package	Temperature Range	Part Number		Marking ID		Packing Type
		Lead Free	Green	Lead Free	Green	
TO-95	-20 to 85°C	AH478Z5-AE1	AH478Z5-AG1	AH478Z5-E1	AH478Z5-G1	Bulk
		AH478Z5-BE1	AH478Z5-BG1	AH478Z5-E1	AH478Z5-G1	Bulk

BCD Semiconductor's Pb-free products, as designated with "E1" suffix in the part number, are RoHS compliant. Products with "G1" suffix are available in green package.

**SINGLE PHASE HALL EFFECT LATCH WITH LOCKED PROTECTION AH478****Absolute Maximum Ratings (Note 1)** $(T_A=25^{\circ}\text{C})$

Parameter	Symbol	Value	Unit
Supply Voltage	V_{CC}	20	V
Magnetic Flux Density	B	Unlimited	Gauss
Output ON Current	Continuous	250	mA
	Hold	300	mA
	Peak (start up)	600	mA
Power Dissipation	P_D	600	mW
Thermal Resistance	Die to atmosphere	θ_{JA}	208 °C/W
Storage Temperature	T_{STG}	-50 to 150	°C
ESD (Machine Model)		300	V
ESD (Human Body Model)		3000	V

Note 1: Stresses greater than those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "Recommended Operating Conditions" is not implied. "Absolute Maximum Ratings" for extended period may affect device reliability.

Recommended Operating Conditions $(T_A=25^{\circ}\text{C})$

Parameter	Symbol	Min	Max	Unit
Supply Voltage	V_{CC}	3.5	18	V
Ambient Temperature	T_A	-20	85	°C



SINGLE PHASE HALL EFFECT LATCH WITH LOCKED PROTECTION AH478

Electrical Characteristics

($T_A=25^{\circ}\text{C}$, $V_{CC}=14\text{V}$, unless otherwise specified)


Parameter	Symbol	Test Condition	Min	Typ	Max	Unit
Output Saturation Voltage (Sink)	V_{SAT}	$I_{OUT}=150\text{mA}$		0.2	0.25	V
Output Saturation Voltage (Drive)		$I_{OUT}=150\text{mA}$	$V_{CC}-1.0$	$V_{CC}-0.8$	V_{CC}	V
Supply Current	I_{CC}	$V_{CC}=20\text{V}$, output open		14	16	mA
Output ON Time	T_{ON}	$R_L=820\Omega$, $C_{CT}=0.47\mu\text{F}$		135		ms
Output OFF Time	T_{OFF}	$R_L=820\Omega$, $C_{CT}=0.47\mu\text{F}$		1		s
Charge Current	I_{CHG}	$V_{CT}=1$ to 2.5V		3.5		μA
Discharge Current	I_{DHG}	$V_{CT}=3.5$ to 2.5V		0.5		μA
Duty Ratio	D_R	T_{OFF}/T_{ON}	5	7	10	
Clamp Voltage	V_{CL}	Limiting Voltage		2.8		V
Comparator Voltage	V_{CP}	Limiting Voltage		1.8		V
Thermal Resistance (Junction to Case)	θ_{JC}	TO-95		45		$^{\circ}\text{C}/\text{W}$

Magnetic Characteristics

($T_A=25^{\circ}\text{C}$)

Parameter	Symbol	Grade	Min	Typ	Max	Unit
Operating Point	B_{OP}	A	5		70	Gauss
		B			100	
Releasing Point	B_{RP}	A	-70		-5	Gauss
		B	-100			
Hysteresis	B_{HYS}			70		Gauss

Test Circuit

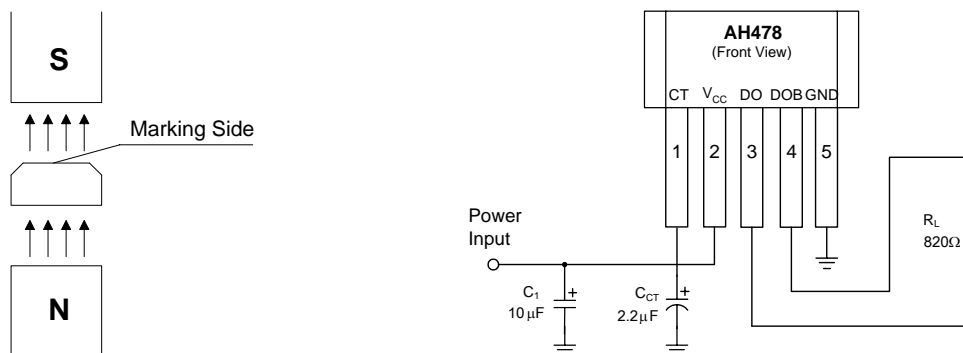



SINGLE PHASE HALL EFFECT LATCH WITH LOCKED PROTECTION AH478

Typical Performance Characteristics

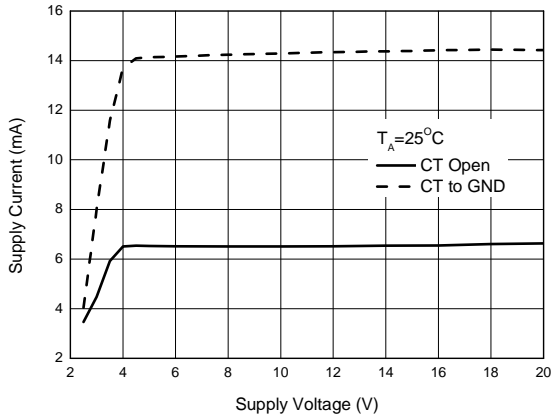


Figure 4. Supply Current vs. Supply Voltage

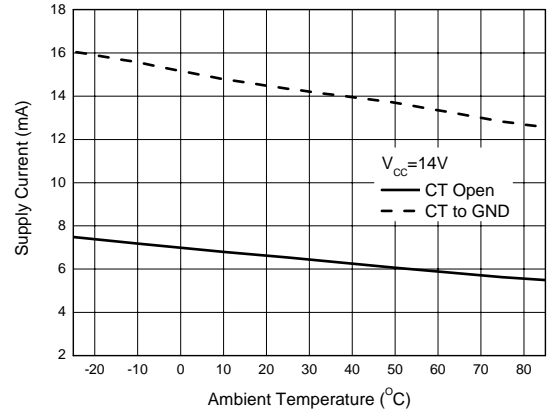


Figure 5. Supply Current vs. Ambient Temperature

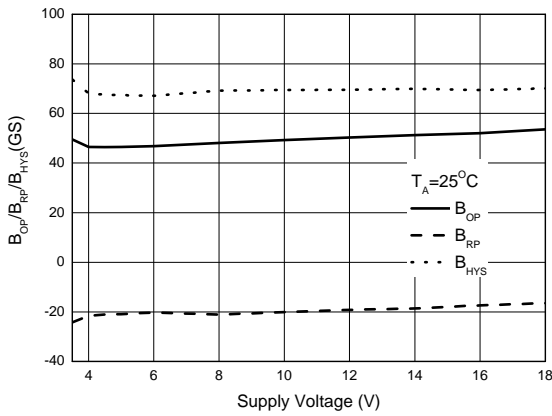


Figure 6. $B_{OP}/B_{RP}/B_{HYS}$ vs. Supply Voltage

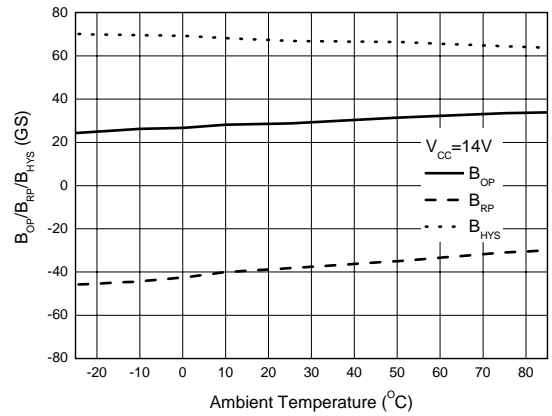


Figure 7. $B_{OP}/B_{RP}/B_{HYS}$ vs. Ambient Temperature



SINGLE PHASE HALL EFFECT LATCH WITH LOCKED PROTECTION AH478

Typical Performance Characteristics (Continued)

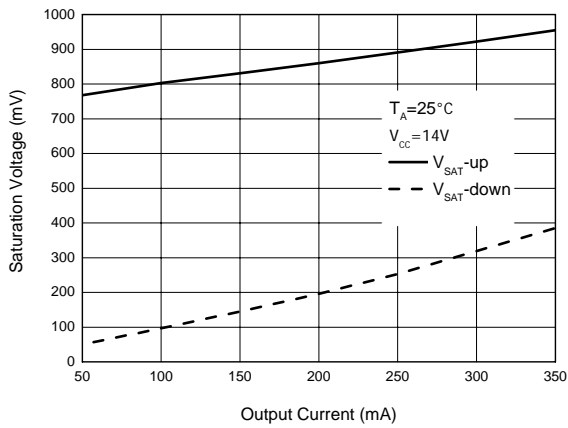


Figure 8. Saturation Voltage vs. Output Current

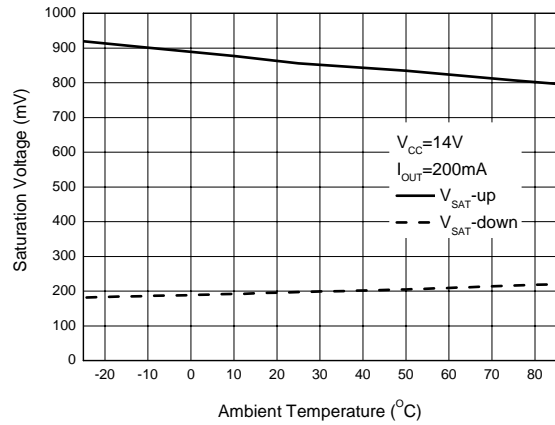


Figure 9. Saturation Voltage vs. Ambient Temperature


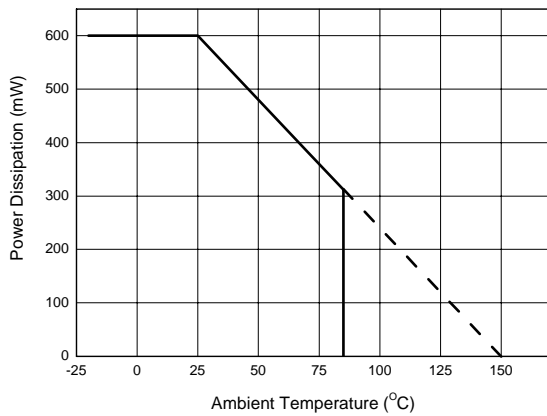


Figure 10. Power Dissipation vs. Ambient Temperature

SINGLE PHASE HALL EFFECT LATCH WITH LOCKED PROTECTION AH478

Typical Application

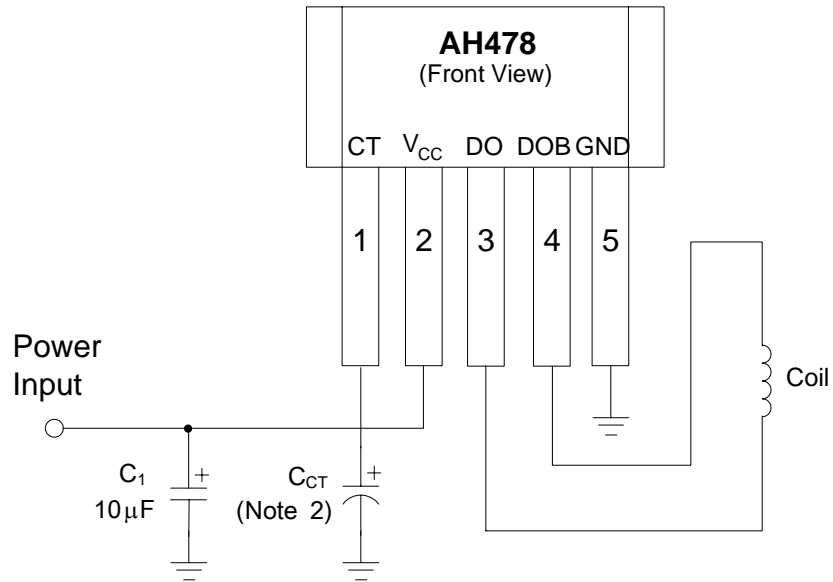


Note 2: The capacitance of C_{CT} can be selected from 1µF to 3.3µF, and the recommended value is 2.2µF.

Figure 11. Typical Application of AH478

SINGLE PHASE HALL EFFECT LATCH WITH LOCKED PROTECTION AH478

Operating Diagram (Note 3)

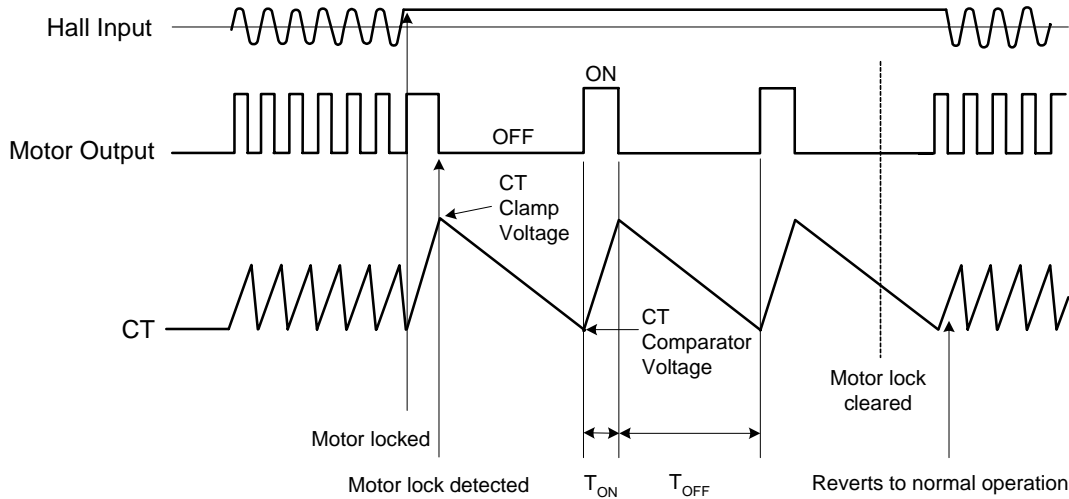

Note 3: The automatic restart circuit detects a motor lock condition and automatically turns off the output current. When the lock is cleared, the IC automatically restarts and allows the motor to run. In AH478, automatic restart is performed in the following manner. A motor lock condition is detected when the Hall signal stops switching. The output is ON when CT pin is being charged, and OFF when CT pin is being discharged.

$$T_{ON} = \frac{C * (V_{CL} - V_{CP})}{I_{CHG}} (\text{Sec})$$

$$T_{OFF} = \frac{C * (V_{CL} - V_{CP})}{I_{DHG}} (\text{Sec})$$

Output ON time (T_{ON}) and OFF time (T_{OFF}) are determined by C, the capacitance of the CT pin external capacitor.

V_{CL} is the CT pin clamp voltage

V_{CP} is the CT pin comparator voltage

I_{CHG} is the CT pin charge current

I_{DHG} is the CT pin discharge current

Figure 12. Control Timing Diagram of AH478




SINGLE PHASE HALL EFFECT LATCH WITH LOCKED PROTECTION AH478

Mechanical Dimensions

TO-95

Unit: mm(inch)

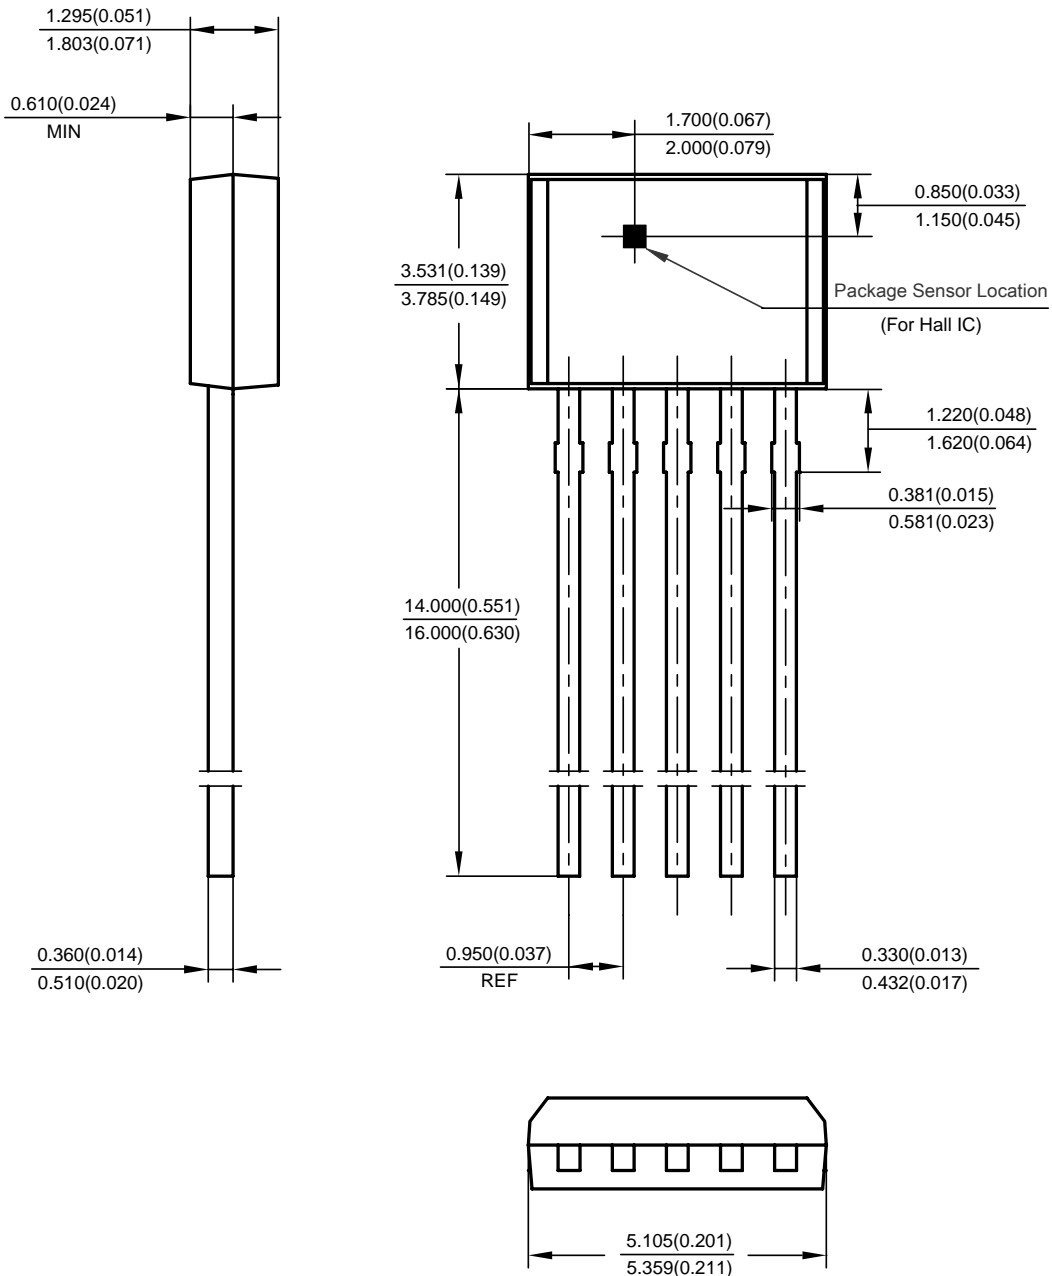



BCD Semiconductor Manufacturing Limited

<http://www.bcdsemi.com>

IMPORTANT NOTICE

BCD Semiconductor Manufacturing Limited reserves the right to make changes without further notice to any products or specifications herein. BCD Semiconductor Manufacturing Limited does not assume any responsibility for use of any its products for any particular purpose, nor does BCD Semiconductor Manufacturing Limited assume any liability arising out of the application or use of any its products or circuits. BCD Semiconductor Manufacturing Limited does not convey any license under its patent rights or other rights nor the rights of others.

MAIN SITE

- Headquarters

BCD Semiconductor Manufacturing Limited

No. 1600, Zi Xing Road, Shanghai Zizhu Science-based Industrial Park, 200241, China
Tel: +86-21-24162266, Fax: +86-21-24162277

- Wafer Fab

Shanghai SIM-BCD Semiconductor Manufacturing Co., Ltd.

800 Yi Shan Road, Shanghai 200233, China
Tel: +86-21-6485 1491, Fax: +86-21-5450 0008

REGIONAL SALES OFFICE

Shenzhen Office

Shanghai SIM-BCD Semiconductor Manufacturing Co., Ltd., Shenzhen Office
Room E, 5F, Noble Center, No.1006, 3rd Fuzhong Road, Futian District, Shenzhen,
518026, China
Tel: +86-755-8826 7951
Fax: +86-755-8826 7865

Taiwan Office

BCD Semiconductor (Taiwan) Company Limited
4F, 298-1, Rui Guang Road, Nei-Hu District, Taipei,
Taiwan
Tel: +886-2-2656 2808
Fax: +886-2-2656 2806

USA Office

BCD Semiconductor Corp.
30920 Huntwood Ave. Hayward,
CA 94544, USA
Tel : +1-510-324-2988
Fax: +1-510-324-2788