# AWS-8259

# 15" XGA TFT LCD Industrial Workstation with 9 x ISA/PCI/PICMG Slots, Passive **Backplane and Membrane Keypad**



## **Features**

- 9-slot, 15" TFT LCD workstation
- Resolution: 1024 x 768
- Two-piece design: integrated or separated LCD panel & control chassis
- Built-in touchpad, USB port and floppy drive on front panel
- Designed for simple maintenance with hinged rear door for easy access
- Vibration protection up to 1G
- Heavy-duty stainless steel chassis with aluminum front panel
- Hard anodic coating to prevent panel abrasion and acid corrosion
- Front panel is NEMA4/IP65 compliant





## Introduction

AWS-8259 is an industrial workstation with 9-slot expansion capability. Featuring a 15" detachable display module, the AWS-8259 has a rugged yet flexible design for factory floor applications. Its 15" high-brightness 1024 x 768 LCD fulfills the needs for large information viewing. In addition, the display module can be easily separated for maintenance.

With waterproof character keypads & touchpad features, an additional keyboard or mouse is not needed for operation. The standard 8U size can easily be installed in either racks or mounted in panels.

# **Specifications**

#### General

Button Controls

Membrane Keypad 1 39 operating keys Membrane Keypad 2 10 function kevs

10 programmable macro function keys OSD On front panel with backlight on/off switch

Touchpad On front panel

Certifications BSMI, CE, CCC, and FCC class A

Connectors 1 x front-accessible 6-pin PS/2 with dust-protection

door for keyboard

 Cooling System 1 x 86 CFM fan

Dimensions (W x H x D) 482 x 356 x 229 mm (18.98" x 14.0" x 9")

Aluminum Enclosure

Supports one 3.5" FDD, one 3.5" HDD & one slim Disk Drive Bay

CD-ROM (HDD and CD-ROM optional)

LED Indicators Power on/off and HDD activity

Mounting 19" rack

Power Input

Туре	Watt	Input	Output	MTBF	Safety
AC	300 W	100 ~ 240 V <sub>AC</sub> @ 60 ~ 50 Hz full range 10A			UL/cUL/TUV/ Nemko/FCC/CE EN61000-3-2 Class D/CB/CCC

Weight (Net/ Gross) 18.5 kg (40.79lbs)/20 kg (44.09lbs)

#### **Backplane Options**

PCA-6109P4 4 PCI, 4 ISA, 1 CPU slot backplane

PCA-6109 9 ISA slot backplane

#### **LCD Display**

 Backlight Life 50,000 hours Display Size 15" Display Type XGA TFT LCD Luminance 350 cd/m<sup>2</sup> Max. Colors 262 K

Max. Resolution 1024 x 768 Viewing Angle (H/V°) 120/100

#### **Touchscreen (Optional)**

Interface RS-232

 Lifespan 10 million touches at a single point

Light Transmission

OS Support MS-DOS, Windows 95/98/NT/2000/XP

Power Consumption +5 V @ 200 mA Resolution 1024 x 1024 Type 8-wire, analog resistive

#### **Environment**


 Humidity  $5 \sim 85\%$  RH @  $40^{\circ}$  C, non-condensing

- Humidity (Storage) 5 ~ 95% non-condensing Ingress Protection Front panel: NEMA4, IP65 **Operating Temperature**  $0 \sim 50^{\circ} \text{ C } (32 \sim 122^{\circ} \text{ F})$ 

**Storage Temperature** -20 ~ 60° C

5 ~ 17 Hz, double-amplitude displacement 17 ~ 500 Vibration (Operating)

Hz, 1.0 G peak to peak

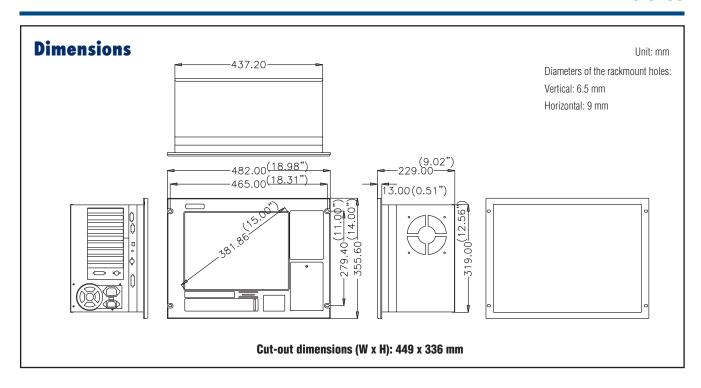

# **Ordering Information**

 AWS-8259TP-XAE 15" XGA TFT LCD Passive Backplane Industrial

Workstation with 9 x ISA/PCI/PICMG Slots and

Membrane keypad

AWS-8259TP-RAE AWS-8259TP with resistive touchscreen

(RS-232 interface)

AWS-8259T-XAE 15" XGA TFT LCD Passive Backplane Industrial

Workstation with 9 x ISA Slots and Membrane keypad

- AWS-8259T-RAE AWS-8259T with resistive touchscreen

(RS-232 interface)

# **CPU Card Suggestions**


Part No	CPU Grade	Description
PCA-6186VE-00B2E	Intel Pentium 4 (400/533 MHz FSB)	Socket 478 Pentium 4/Celeron processor card with VGA/LAN/HISA
PCA-6186LV-00B2E	Intel Pentium 4 (400/533 MHz FSB)	Socket 478 Pentium 4/Celeron processor card with VGA/HISA
PCA-6003VE-00A2E	Intel Pentium III (133 MHz FSB)	Socket 370 Pentium/Celeron processor card with VGA/LAN

### Accessories

**1702002600** Power Cable US Plug 1.8 M **1702002605** Power Cable EU Plug 1.8 M **1702031801** Power Cable UK Plug 1.8 M

**1702031836** Power Cable China/Australia Plug 1.8 M

## **Back View**



## **Side View**

