


## IDC

- Industry compatible
- Competitively priced
- Gold or tin plated contacts
- 2.54 mm pitch

## IDC DIP PLUG - 7.62 SPACING


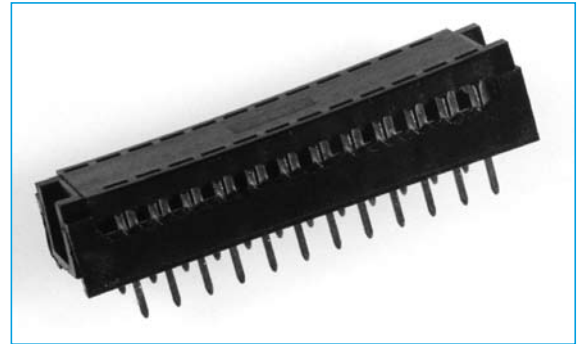


## SPECIFICATION

### Material & Finish

<b>Contact Material:</b>	Brass	<b>Dielectric Withstanding Voltage:</b>	500V AC for One Minute
<b>Insulator Material:</b>	PBT & Glass-Fibre Reinforced UL-94V-0	<b>Operating Temperature:</b>	-40°C to + 105°C
<b>Current Rating:</b>	1 A DC		
<b>Contact Resistance:</b>	30M $\Omega$ Max		
<b>Insulator Resistance:</b>	3000M $\Omega$ Min		

## OUTLINE DRAWING

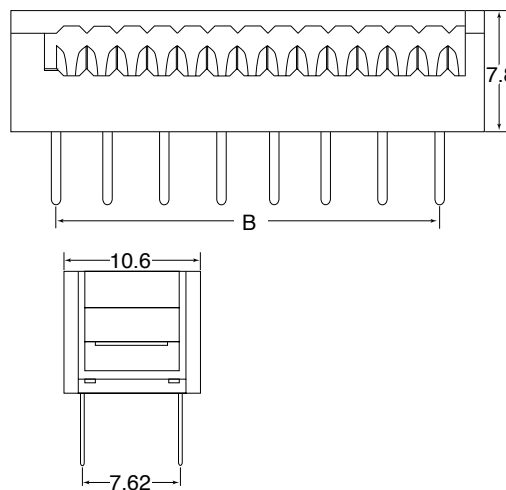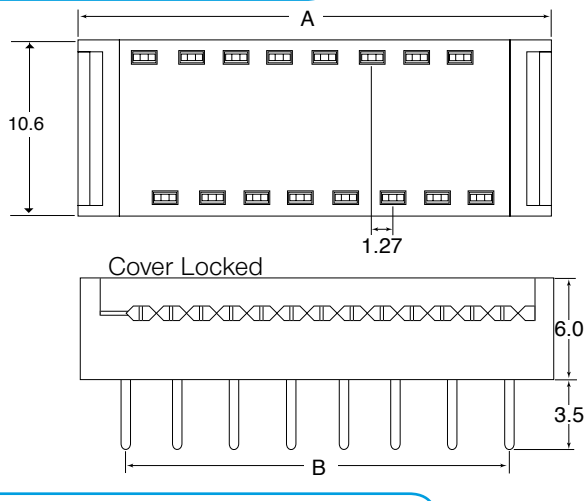

Position	A	B
8	15.44	7.62
10	17.98	10.16
14	23.06	15.24
16	25.60	17.78
18	28.14	20.32
20	30.68	22.86
24	35.76	27.94
28	40.84	33.02
34	48.46	40.64
40	56.08	48.26

## ORDERING INFORMATION

DBC	IDC	13	10	A	T	1
Dubilier Connectors	IDC Connector	Series	N° of Ways	Contact Material	Contact Plating	Colour
			08=8way 10=10way 14=14way 16=16way 18=18way 20=20way 24=24way 28=28way 34=34way 40=40way	A=Brass	T=Tin S= Selective Gold	1=Black