



CHENMKO ENTERPRISE CO.,LTD

GLASS PASSIVATED FAST RECOVERY RECTIFIER

VOLTAGE RANGE 200 - 1000 Volts CURRENT 1.0 Ampere

Lead free devices

**1N4942GPT
THRU
1N4948GPT**

FEATURES


- * Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- * High switching capability
- * Low leakage
- * Low forward voltage drop
- * High current capability
- * Glass passivated junction
- * High surge current capability

MECHANICAL DATA

Case: JEDEC DO-41 molded plastic
Terminals: Plated axial leads, solderable per MIL-STD-750, Method 2026
Polarity: Color band denotes cathode end
Mounting Position: Any
Weight: 0.35 gram



DO-41

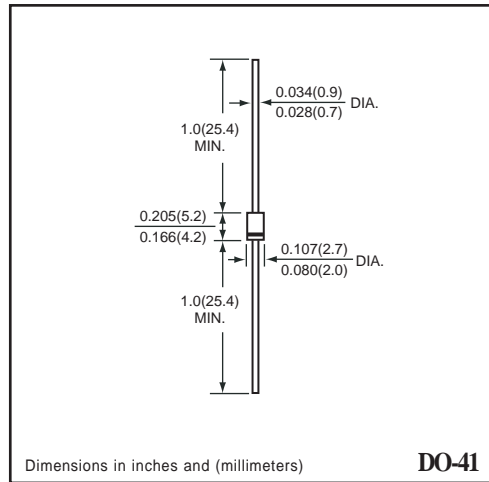

Dimensions in inches and (millimeters)

DO-41

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.
 Single phase, half wave, 60 Hz, resistive or inductive load.
 For capacitive load, derate current by 20%.

MAXIMUM RATINGS (At TA = 25°C unless otherwise noted)

RATINGS	SYMBOL	1N4942GPT	1N4944GPT	1N4946GPT	1N4947GPT	1N4948GPT	UNITS
Maximum Recurrent Peak Reverse Voltage	V _{RRM}	200	400	600	800	1000	Volts
Maximum RMS Voltage	V _{RMS}	140	280	420	560	700	Volts
Maximum DC Blocking Voltage	V _{DC}	200	400	600	800	1000	Volts
Maximum Average Forward Current at TA = 55°C	I _o	1.0					Amps
Peak Forward Surge Current 8.3 ms single half sine-wave superimposed on rated load (JEDEC method)	I _{FSM}	30					Amps
Typical Junction Capacitance (Note 1)	C _J	15					pF
Operating and Storage Temperature Range	T _{J,STG}	-65 to +175					°C

ELECTRICAL CHARACTERISTICS (At TA = 25°C unless otherwise noted)

CHARACTERISTICS	SYMBOL	1N4942GPT	1N4944GPT	1N4946GPT	1N4947GPT	1N4948GPT	UNITS
Maximum Instantaneous Forward Voltage at 1.0 A DC	V _F	1.3					Volts
Maximum DC Reverse Current at Rated DC Blocking Voltage at TA = 25°C	I _R	5.0					uAmps
Maximum Full Load Reverse Current Average, Full Cycle 0.375" (9.5mm) lead length at TL = 55°C		100					uAmps
Maximum Reverse Recovery Time (Note 2)	t _{rr}	150		250		500	nSec

NOTES : 1. Measured at 1.0 MHz and applied reverse voltage of 4.0 volts
 2. Test Conditions : I_F = 0.5 A, I_R = -1.0 A, I_{RR} = -0.25 A

RATING CHARACTERISTIC CURVES (1N4942GPT THRU 1N4948GPT)

FIG. 1 - TEST CIRCUIT DIAGRAM AND REVERSE RECOVERY TIME CHARACTERISTIC

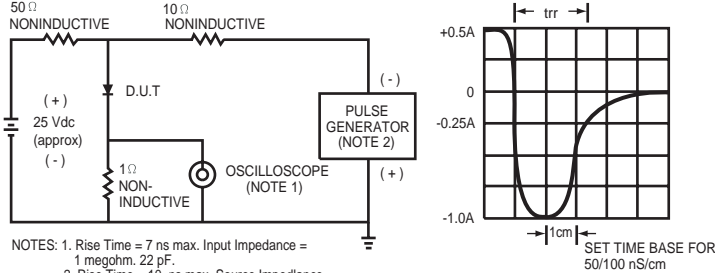


FIG. 2 - TYPICAL FORWARD CURRENT DERATING CURVE




FIG. 3 - TYPICAL REVERSE CHARACTERISTICS

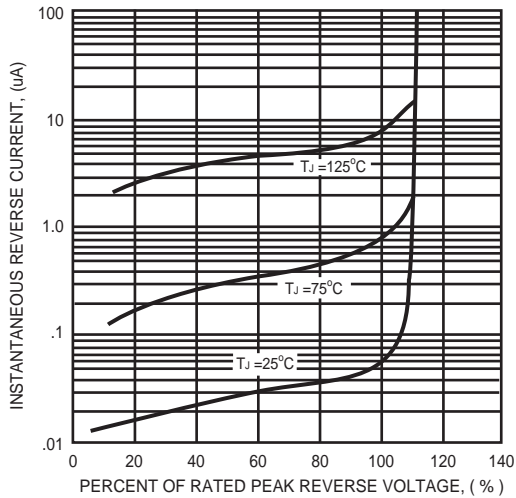


FIG. 4 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

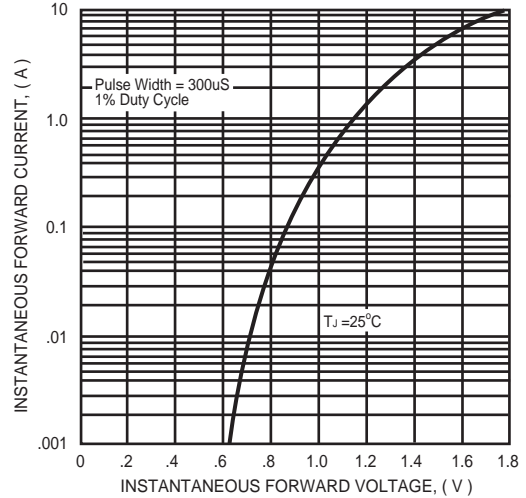


FIG. 5 - MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

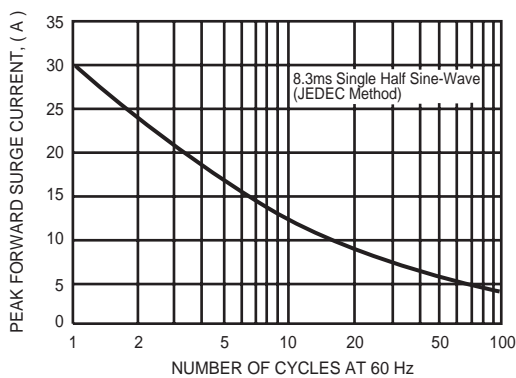


FIG. 6 - TYPICAL JUNCTION CAPACITANCE

