



NPN BUX98

HIGH VOLTAGE FAST SWITCHING

The BUX98 is silicon multi-epitaxial NPN transistor in Jedec TO-3. They are intended and industrial applications from single and three-phase mains operation.

Compliance to RoHS.

ABSOLUTE MAXIMUM RATINGS

| Symbol | Ratings | | Value | Unit |
|-----------|---------------------------------|--------------------------|-------------|------------|
| V_{CEO} | Collector-Emitter Voltage | $I_B = 0$ | 400 | V |
| V_{CER} | Collector-Emitter Voltage | $(R_{BE} \leq 10\Omega)$ | 350 | V |
| V_{CES} | Collector-Base Voltage | $V_{BE} = 0$ | 850 | V |
| V_{EBO} | Emitter-Base Voltage | $I_C = 0$ | 7 | |
| I_C | Collector Current | | 30 | A |
| I_{CM} | Collector Peak Current | $t_p = <5ms$ | 60 | A |
| I_{CP} | Collector Peak Current non Rep. | $t_p = <20\mu s$ | 80 | A |
| I_B | Base Current | | 8 | A |
| I_{BM} | Base Peak Current | $t_p = <5ms$ | 30 | A |
| P_t | Total Power Dissipation | @ $T_C = 25^\circ$ | 250 | Watts |
| T_J | Junction Temperature | | 200 | $^\circ C$ |
| T_{Stg} | Storage Temperature | | -65 to +200 | $^\circ C$ |

THERMAL CHARACTERISTICS

| Symbol | Ratings | Value | Unit |
|------------|--------------------------------------|-------|--------------|
| R_{thJC} | Thermal Resistance, Junction to Case | 0.7 | $^\circ C/W$ |



NPN BUX98

ELECTRICAL CHARACTERISTICS

TC=25°C unless otherwise noted


| Symbol | Ratings | Test Condition(s) | Min | Typ | Mx | Unit |
|---------------|--|--|-----|-----|-----|---------------|
| $V_{CE(SUS)}$ | Collector-Emitter Sustaining Voltage (1) | $I_C = 100 \text{ mA}$ | 700 | - | - | V |
| I_{CER} | Collector Cutoff Current | $V_{CE} = V_{CES}, R_{BE} = 10\Omega$ | - | - | 1 | mA |
| | | $V_{CE} = V_{CES}, R_{BE} = 10\Omega, T_{CASE} = 125^\circ\text{C}$ | - | - | 8 | |
| I_{CEO} | Collector Cutoff Current | $V_{CE} = V_{CEO}, I_B = 0\text{A}$ | - | - | 2 | mA |
| I_{CES} | Collector Cutoff Current | $V_{CE} = V_{CES}, V_{BE} = 0$ | - | - | 1 | mA |
| | | $V_{CE} = V_{CES}, V_{BE} = 0, T_{CASE} = 125^\circ\text{C}$ | - | - | 6 | |
| I_{EBO} | Emitter Cutoff Current | $V_{EB} = 5.0 \text{ V}, I_C = 0$ | - | - | 2 | mA |
| $V_{CE(SAT)}$ | Collector-Emitter saturation Voltage (1) | $I_C = 12 \text{ A}, I_B = 3 \text{ A}$ | - | - | 1.5 | V |
| | | $I_C = 16 \text{ A}, I_B = 5 \text{ A}$ | - | - | 2 | |
| | | $I_C = 20 \text{ A}, I_B = 8 \text{ A}$ | - | - | 3 | |
| $V_{BE(SAT)}$ | Base-Emitter saturation Voltage (1) | $I_C = 12 \text{ A}, I_B = 3 \text{ A}$ | - | - | 1.6 | |
| | | $I_C = 20 \text{ A}, I_B = 8 \text{ A}$ | - | - | 2 | |
| t_{on} | Turn-on time | RESISTIVE LOAD | - | 0.5 | 1 | μs |
| t_s | Storage time | $I_C = 8 \text{ A}, I_B = 1 \text{ A}, V_{CC} = 150 \text{ V}$ $I_C = 12 \text{ A}, V_{CC} = 250 \text{ V}$ | - | 1.5 | 3 | |
| t_f | File time | $I_{B1} = -I_{B2} = 3 \text{ A}$ | - | 0.2 | 0.8 | |

(1) Pulse Duration = 300 μs , Duty Cycle $\leq 1.5\%$


NPN BUX98

MECHANICAL DATA CASE TO-3

| DIMENSIONS (mm) | | | |
|-----------------|-------|-----|-------|
| | min | typ | max |
| A | 11 | - | 13.10 |
| B | 0.97 | - | 1.15 |
| C | 1.5 | - | 1.65 |
| D | 8.32 | - | 8.92 |
| F | 19 | - | 20 |
| G | 10.70 | - | 11.1 |
| N | 16.50 | - | 17.20 |
| P | 25 | - | 26 |
| R | 4 | - | 4.09 |
| U | 38.50 | - | 39.30 |
| V | 30 | - | 30.30 |

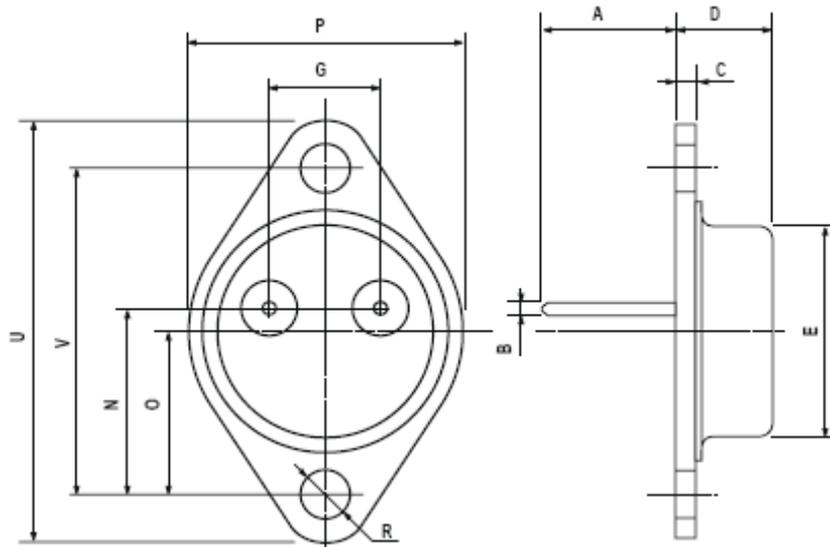

| | |
|---------|-----------|
| Pin 1 : | Base |
| Pin 2 : | Emitter |
| Case : | Collector |



Information furnished is believed to be accurate and reliable. However, CS assumes no responsibility for the consequences of use of such information nor for errors that could appear.
Data are subject to change without notice.