


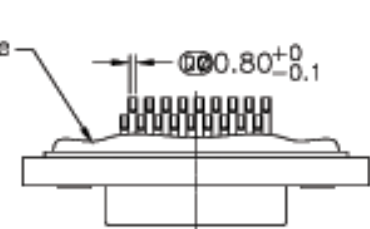
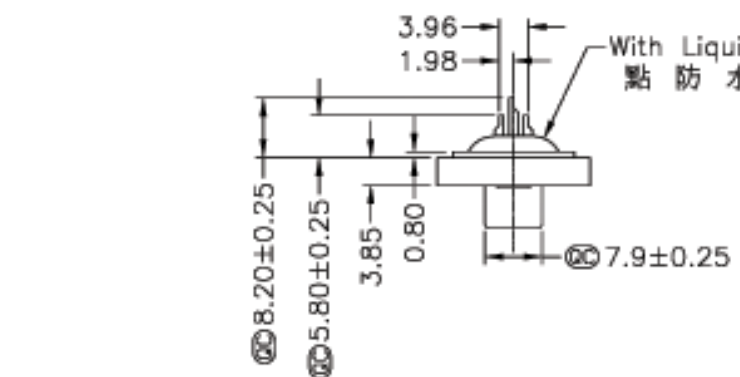
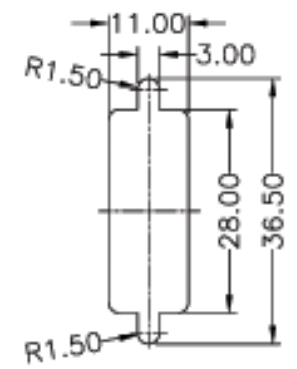


THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN LHM PERSONNEL WITHOUT AUTHORIZATION FROM LHM CORP.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION

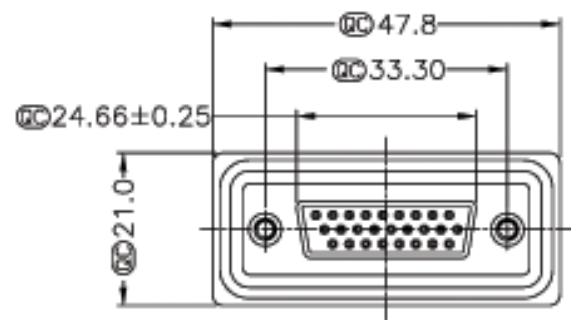

Screw L=5.0 For Panel Thickness Under 1.2mm
適用板厚為 1.2mm 以下
Screw L=6.0 For Panel Thickness Between 1.2~2.0mm
適用板厚為 1.2~2.0mm

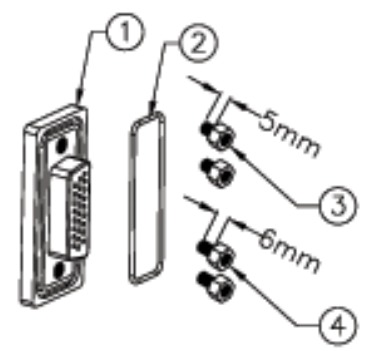

Recommended Panel Cut-Out
建議挖孔尺寸



- Note:
- * Ⓢ Important Dimension. (Ⓢ為重點尺寸)
 - * Waterproof Rate : IP67
 - * Connector: Black, Nylon+GF
 - * Pin: Copper Alloy, Gold Plated
 - * Do Mating Test After Glued 點膠後, 須作對插測試
 - * Applicable Wire Range: 24AWG-28AWG 適用電線範圍: 24AWG-28AWG
 - * 注意LOGO 為 Ⓢ

UNIT:mm		TITLE		ITEM NO		DRAWN BY		DATE	
TOLERANCE		D-SUB,HD,HD-26PFFS		A-HDF-26-LL-WP		Gao Ling		2006/05/06	
JX ±0.25		SCALE Free		DWG NO		CHECKED BY		DATE	
JXX ±0.1		SHEET 1 OF 1		A-HDF-26-LL-WP		Robert Hsu		2006/05/30	
JXXX ±0.05		REV. 01				APPROVED BY		DATE	
ANGLES ±1°		SIZE A4				Max		2006/06/02	
		Ⓢ : Inspection Item							

