


14 Pin DIP TTL Square-Wave Generator With Complimentary Output

Features

- Output frequencies from 2 to 100 MHz $\pm 5\%$
- Low Profile 14 pin dual-in-line package
- Operating temperature range 0 to 70 °C
- Output synchronized using enable line
- Inherent Delay 4nS Typ.
- 50% duty cycle
- Schottky TTL

PART NUMBER	MHz $\pm 5\%$	PART NUMBER	MHz $\pm 5\%$
EPA209-2	2	EPA209-35	35
EPA209-3	3	EPA209-40	40
EPA209-4	4	EPA209-45	45
EPA209-5	5	EPA209-50	50
EPA209-10	10	EPA209-60	60
EPA209-15	15	EPA209-70	70
EPA209-20	20	EPA209-80	80
EPA209-25	25	EPA209-90	90
EPA209-30	30	EPA209-100	100

DC Electrical Characteristics		Test Conditions	Min	Max	Unit
Parameter					
V _{OH}	High-Level Output Voltage	V _{CC} = min. V _{IL} = max. I _{OH} = max	2.7		V
V _{OL}	Low-Level Output Voltage	V _{CC} = min. V _{IH} = min. I _{OL} = max		0.5	V
V _{IK}	Input Clamp Voltage	V _{CC} = min. I _I = I _{IK}		-1.2V	V
I _{IH}	High-Level Input Current	V _{CC} = max. V _{IN} = 2.7V		50	μ A
		V _{CC} = max. V _{IN} = 5.25V		1.0	mA
I _{IL}	Low-Level Input Current	V _{CC} = max. V _{IN} = 0.5V		-2	mA
I _{OS}	Short Circuit Output Current	V _{CC} = max. V _{OUT} = 0.	-40	-100	mA
I _{CCH}	High-Level Supply Current	V _{CC} = max. V _{IN} = OPEN		75	mA
I _{CCL}	Low-Level Supply Current	V _{CC} = max. V _{IN} = 0		75	mA
T _{RO}	Output Rise Time	V _{CC} = 5.0V		4	nS
N _H	Fanout High-Level Output	V _{CC} = max. V _{OH} = 2.7V		20 TTL LOAD	
N _L	Fanout Low-Level Output	V _{CC} = max. V _{OL} = 0.5V		10 TTL LOAD	

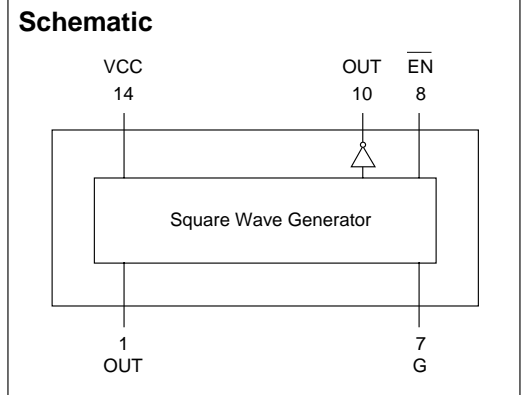

Recommended Operating Conditions		Min	Max	Unit
V _{CC}	Supply Voltage	4.75	5.25	V
V _{IH}	High-Level Input Voltage	2.0		V
V _{IL}	Low-Level Input Voltage		0.8	V
I _{IK}	Input Clamp Current		-18	mA
I _{OH}	High-Level Output Current		-1.0	mA
I _{OL}	Low-Level Output Current		20	mA
d	Duty Cycle	45	55	%
T _A	Operating Free-Air Temperature	0	+70	°C

