


SPECIFICATION FOR APPROVAL

REF : 20100118-A

PAGE: 1


PROD. NAME	POWER INDUCTOR	ABC'S DWG NO.	PA0618□□□□L□-□□□
		ABC'S ITEM NO.	

I . CONFIGURATION & DIMENSIONS :

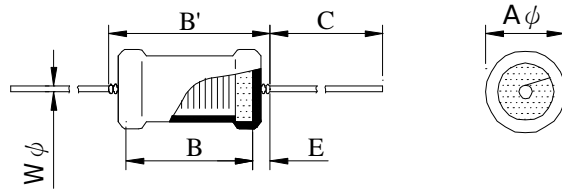


A	: 6.0 max.	m/m
B	: 13.0±1.0	m/m
B'	: 18.0 max.	m/m
C	: 25.0±5.0	m/m
E	: 3.0 max.	m/m
Wφ	: 0.65±0.05	m/m

II . SCHEMATIC DIAGRAM :



III . MATERIALS :

- a . Core : Ferrite DR core
- b . Wire : Enamelled copper wire
- c . Lead : Sn/Ag/Cu
- d . Tube : Shrinkable tube 125°C, 600V
- e . Remark : Products comply with RoHS' requirements

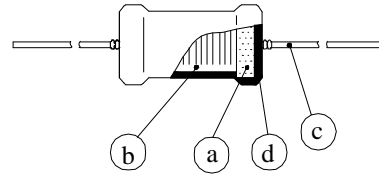

IV . GENERAL SPECIFICATION :

- a . The inductance drop at rated current is 10% max.
- b . Temp. rise : 45°C max. at rated current.
- c . Storage temp. : -40~+105°C
- d . Operating temp. : -40~+85°C

V . ELECTRICAL CHARACTERISTICS :

DWG No.	Inductance (μH)	Test Freq. (Hz)	RDC (Ω) max.	IDC (A) max.
PA0618100KL□-□□□	10 ±10%	1K	0.075	2.00
PA0618250KL□-□□□	25 ±10%	1K	0.150	1.20
PA0618500KL□-□□□	50 ±10%	1K	0.200	0.80
PA0618101KL□-□□□	100 ±10%	1K	0.300	0.60
PA0618251KL□-□□□	250 ±10%	1K	1.000	0.40
PA0618501KL□-□□□	500 ±10%	1K	2.000	0.25
PA0618102KL□-□□□	1000 ±10%	1K	3.000	0.20

- 1). □ : Packging Information... [A]: Bulk
 2). "- □□□ ":Reference code

