

BOARD TO WIRE CONNECTORS

3.96mm PITCH

SECTION 8

- 2 - 15 way
- Accepts wire of 18 - 24 AWG
- Housing, Wafer and Terminal Available
- Current rating 7A, AC, DC
- Voltage rating 250V AC, DC
- PCB thickness 1.6mm



SPECIFICATION

General

Withstand Voltage: 1500v AC/min
Insulation Resistance: 1000mΩ min
Temperature Range: -25° C to +85° C

Wafer

Material:
Post: Brass, Tin/Plated
Base: Nylon 66, UL94V-0 or 94V-0

Housing



Material: Nylon 66, UL94V-0 or 94V-0

Terminal



Wire Acceptance: 18-24 AWG
Material: Brass
Finish: Tin/plated 40µ" min
Thickness: 0.25mm

OUTLINE DRAWING




DBC23.96xT





DBC23.96xS

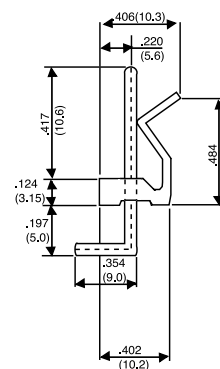

DBC23.96xH



DBC23.96 PIN



Dim	mm
A	No Ways x3.96
B	(No ways x3.96) - 3.96
C	(No ways x 4)x0.4

ORDERING INFORMATION

DBC	2	3.96	2	T
Dubilier Connectors	Series	Pitch	N° of Ways	Style
		3.96 = 3.96mm pitch	2 = 2ways 10=10ways etc	T =Top Entry S = Side Entry 90° H = Housing

DBC	2	3.96	PIN
Dubilier Connectors	Series	Pitch	Pin
		3.96 = 3.96mm pitch	