

200 WATT SWITCHING POWER SUPPLIES

DESCRIPTION

The PU200 series comprises single and multiple output models for 200 watts of continuous output power. Auto-ranging input allows them to operate from any line voltage throughout the world without a selector strap. All auxiliary outputs are with magnetic amplifier or linear regulator to keep regulation. The units are constructed on a printed circuit board with a U-bracket for mechanical support and heat sinking. A cover-and-fan assembly can be added during manufacturing.

FEATURES

- Auto-ranging input
- Overvoltage protection
- Short-circuit protection with auto-recovery
- Power Fail Detect (PFD) signal
- 100% burn-in at full rated load
- Optional cover-and-fan assembly


INPUT SPECIFICATIONS

Input voltage: 90 to 130 VAC, or 180 to 264 VAC (auto-ranging)
Input frequency: 47 to 63 Hz
Input current: 4.5A (rms) for 115VAC
 2.6A (rms) for 230VAC
Leakage current: 0.4mA max. @115VAC, 60Hz
 0.8mA max. @230VAC, 50Hz

OUTPUT SPECIFICATIONS

Output voltage/current : See rating chart
Total output power: 200 watts maximum
Ripple and noise : 2% peak to peak maximum
Overvoltage protection : Provided on output #1 only; set at 112 - 132 % of its nominal output voltage
Overcurrent protection: All outputs protected to short circuit conditions
Temperature coefficient: All outputs +/-0.04%/ °C maximum
Transient response : Maximum excursion of 4% or better on all models; recovering to 1% of final value within 500us after a 25% step load change
PFD signal : TTL logic high for normal operation and TTL logic low upon loss of input power. This signal appears at least 1 ms prior to +5V output dropping 5% below its nominal value. This signal also provides a minimum delay of 100 ms after +5V is within regulation.

PU200 SERIES

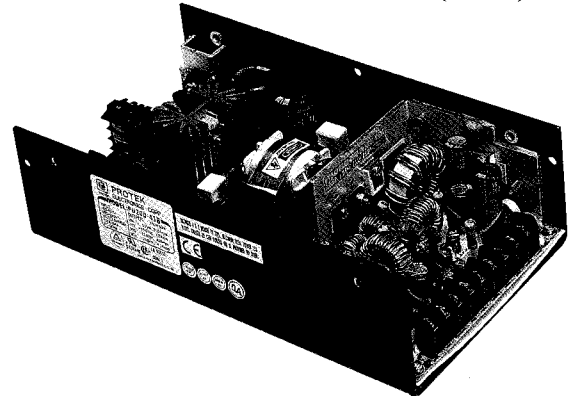

Safety Standard Approvals:



UL 1950
File No. E137410



C22.2 No. 950
File No. LR93632



EN 60950
Certificate No. R9452561

ENVIRONMENTAL SPECIFICATIONS

Operating temperature: 0°C to +70°C
Storage temperature: -40°C to +85°C
Relative humidity: 5% to 95% non-condensing
Derating: Derate from 100% at +50 °C linearly to 50% at +70 °C
Cooling: 25 CFM forced air, provided on "C" version, to be provided for "B" version by user

GENERAL SPECIFICATIONS

Switching frequency: 75KHz +/-5KHz
Efficiency : 70% minimum on all models
Hold-up time : 12 msec minimum at 110VAC
Line regulation : +/-0.5% maximum at full load
Inrush current : 20 amps @ 115VAC, or 40 amps @ 230VAC, at 25 °C cold start
Withstand voltage : 3000VAC from input to output
 1500VAC from input to ground
 500VAC from output to ground
MTBF : 450,000 hours minimum at full load at 25°C ambient, calculated per MIL-HDBK-217F
EMI requirements : Meets conducted limits of
 (a) FCC Level B
 (b) EN 55022 Class B
Safety requirements : Meets or exceeds:
 (a) UL 1950
 (b) CSA C22.2 No. 950
 (c) IEC 950 (EN 60950)

AUTORANGING INPUT


PU200 SERIES

OUTPUT VOLTAGE/CURRENT RATING CHART

(1)(5)(6) Model	Output #1				Output #2 (2)				Output #3				Output #4 (3)				Maximum Output Power (4)
	Vnom.	Imin.	Imax.	Tol.	Vnom.	Imin.	Imax.	Tol.	Vnom.	Imin.	Imax.	Tol.	Vnom.	Imin.	Imax.	Tol.	
PU200-10	5V	3.0A	40A	2%	(N/A)				(N/A)				(N/A)				200W
PU200-12	12V	1.2A	16.7A	2%	(N/A)				(N/A)				(N/A)				200W
PU200-13	15V	1.0A	13.4A	2%	(N/A)				(N/A)				(N/A)				200W
PU200-14	24V	0.6A	8.4A	2%	(N/A)				(N/A)				(N/A)				200W
PU200-16	30V	0.5A	6.7A	2%	(N/A)				(N/A)				(N/A)				200W
PU200-18	48V	0.5A	4.2A	2%	(N/A)				(N/A)				(N/A)				200W
PU200-23	+5V	3.0A	30A	2%	+12V	0A	8A	4%	(N/A)				(N/A)				200W
PU200-24	+5V	3.0A	30A	2%	+15V	0A	6A	4%	(N/A)				(N/A)				200W
PU200-25	+5V	3.0A	30A	2%	+24V	0A	4A	4%	(N/A)				(N/A)				200W
PU200-30	+5V	3.0A	30A	2%	+12V	0A	8A	4%	-5V	0A	6A	4%	(N/A)				200W
PU200-31	+5V	3.0A	30A	2%	+12V	0A	8A	4%	-12V	0A	4A	4%	(N/A)				200W
PU200-32	+5V	3.0A	30A	2%	+15V	0A	6A	4%	-15V	0A	4A	4%	(N/A)				200W
PU200-33	+5V	3.0A	30A	2%	+15V	0A	6A	4%	-12V	0A	4A	4%	(N/A)				200W
PU200-40	+5V	3.0A	30A	2%	+12V	0A	8A	4%	-12V	0A	4A	4%	5V	0A	6A	4%	200W
PU200-41	+5V	3.0A	30A	2%	+15V	0A	6A	4%	-15V	0A	4A	4%	24V	0A	4A	4%	200W
PU200-42	+5V	3.0A	30A	2%	+12V	0A	8A	4%	-12V	0A	4A	4%	12V	0A	4A	4%	200W
PU200-44	+5V	3.0A	30A	2%	+12V	0A	8A	4%	-15V	0A	4A	4%	15V	0A	4A	4%	200W
PU200-45	+5V	3.0A	30A	2%	+12V	0A	8A	4%	-12V	0A	4A	4%	24V	0A	4A	4%	200W

- Notes: (1) Add suffix "B" for U-bracket format and "C" for enclosed format, e.g. PU200-45C.
 (2) Peak current is 12A on +12V, 9A on +15V and 6A on +24V.
 (3) Output #4 is floating. It can be connected externally for positive or negative output.
 (4) 200 watts for "C" version with a cover-and-fan assembly. 150 watts for "B" version without moving air (maximum current of output #1 & #2 derated to 70%), or 200 watts with 25 CFM forced air provided by user.
 (5) When the remote Sense facility is not used, +Sense must be connected to +V, and -Sense to return, on P2 connector.
 (6) All models may be operated at no-load. At no-load, output voltage tolerance increases to 10%.

MECHANICAL SPECIFICATIONS

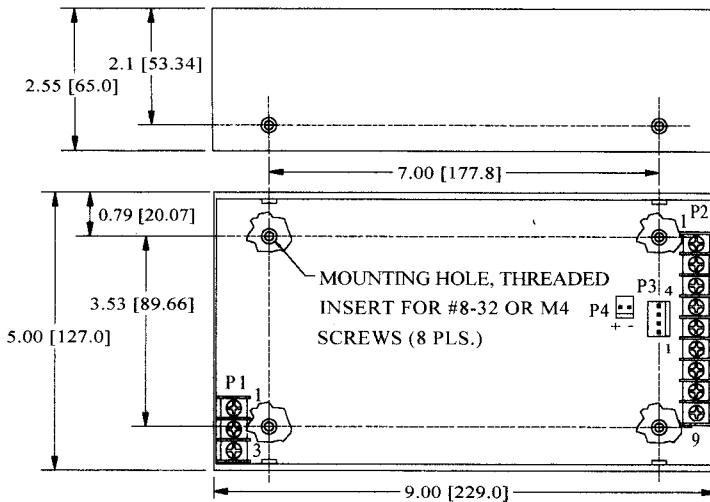

NOTES:

- Dimensions shown in inch [mm]
- Tolerance 0.02 [0.5] maximum
- Input connector P1 is Beau Inc. P/N 72-5-03C, output connector P2 is Beau Inc. P/N 72-5-09C. Screws are #6-32 on 0.375 inch centers.
- Connector P3 mates with Molex housing 22-01-1043 and Molex 40445 series crimp terminal
- Connector P4 mates with Molex housing 22-01-1023 and Molex 40445 series crimp terminal
- P4 is for DC fan rated 24V/0.12A (models PU200-14, -16, -25), or 12V/0.2A (other models).
- Weight:
 1.2 Kgs (2.65 Lbs.) approx. for "B" version
 1.5 Kgs (3.31 Lbs.) approx. for "C" version

PIN CHART

MODEL	CONN PIN	P1			P2					P3				
		1	2	3	1,2	3,4,5	6	7	8	9	1	2	3	4
PU200-10	PU200-12	AC LIVE	AC NEUTRAL	AC GROUND	-SENSE	RET.	OUTPUT #1	OUTPUT #1	OUTPUT #1	+SENSE	FAN	COM. RET.	COM. RET.	PFD
PU200-13	PU200-14	AC LIVE	AC NEUTRAL	AC GROUND	OUTPUT #1	COM. RET.	OUTPUT #2	N.C.	N.C.	N.C.	FAN	COM. RET.	COM. RET.	PFD
PU200-16	PU200-18	AC LIVE	AC NEUTRAL	AC GROUND	OUTPUT #1	COM. RET.	OUTPUT #2	OUTPUT #3	N.C.	N.C.	FAN	COM. RET.	COM. RET.	PFD
PU200-23	PU200-24	AC LIVE	AC NEUTRAL	AC GROUND	OUTPUT #1	COM. RET.	OUTPUT #2	OUTPUT #3	OUTPUT #4	OUTPUT #4	FAN	COM. RET.	COM. RET.	PFD
PU200-30	PU200-31	AC LIVE	AC NEUTRAL	AC GROUND	OUTPUT #1	COM. RET.	OUTPUT #2	OUTPUT #3	OUTPUT #4	OUTPUT #4	FAN	COM. RET.	COM. RET.	PFD
PU200-32	PU200-33	AC LIVE	AC NEUTRAL	AC GROUND	OUTPUT #1	COM. RET.	OUTPUT #2	OUTPUT #3	OUTPUT #4	OUTPUT #4	FAN	COM. RET.	COM. RET.	PFD
PU200-40	PU200-41	AC LIVE	AC NEUTRAL	AC GROUND	OUTPUT #1	COM. RET.	OUTPUT #2	OUTPUT #3	OUTPUT #4	OUTPUT #4	FAN	COM. RET.	COM. RET.	PFD
PU200-42	PU200-44	AC LIVE	AC NEUTRAL	AC GROUND	OUTPUT #1	COM. RET.	OUTPUT #2	OUTPUT #3	OUTPUT #4	OUTPUT #4	FAN	COM. RET.	COM. RET.	PFD
PU200-45		AC LIVE	AC NEUTRAL	AC GROUND	OUTPUT #1	COM. RET.	OUTPUT #2	OUTPUT #3	OUTPUT #4	OUTPUT #4	FAN	COM. RET.	COM. RET.	PFD