

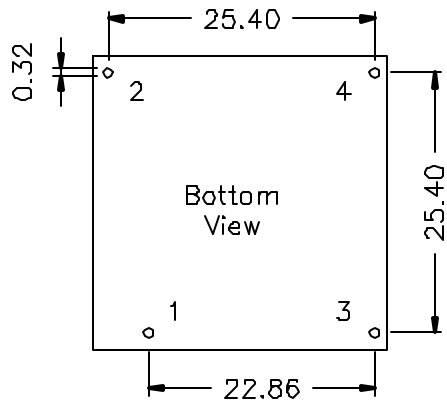
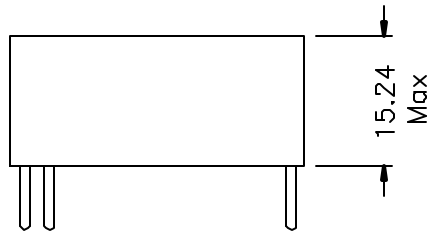


### 1. Mechanical Dimensions:

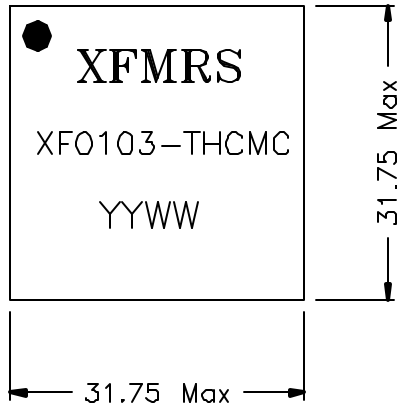

### 2. Schematic:



### 3. Electrical Specification:

OCL: 10mH Min @1KHz 500mV

Leakage Inductance: 130uH Min @100KHz, 500mV

DCR: 0.240 Ohms Max Each Wdg.

Rated Current (For 40°C Rise Max): 1.8Arms

#### Notes:

1. Solderability: Leads shall meet MIL-STD-202, Method 208D for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index > 28%
4. Insulation System Class F 155°C. UL file E151556
5. Operating Temperature Range: All listed parameters are to be within tolerance from -40°C to +85°C
6. Storage Temperature Range: -55°C to +125°C
7. Aqueous wash compatible

Doc Rev: A/1

<b>XFMRS Inc.</b>	Title: Common Mode Choke		
	UNLESS OTHERWISE SPECIFIED	P/N: XF0103-THCMC	REV. A
TOLERANCES: .xx ±0.25	DWN.	李清儿	Jan-25-00
Dimensions in MM	CHK.	孙怡	Jan-25-00
SHEET 1 OF 1	APP.	Joe Huff	Jan-25-00