


Digital Attenuator

P/N: JXWBSJ-210-430-27-R

Frequency Range(MHz)	210 - 430
Attenuation Range /Step(dB)	1 LSB min 127 Range max 7 cell
Attenuation Accuracy(dB)	±1
Attenuation Flatness(dB)	±1
Variation of Phase according to the Attenuation Range / Step(°)	±10
VSWR	1.4 max
Control(V)	3 TTL Compatible
Switching Time(ns)	200 max
Insertion Loss(dB)	4 max
DC bias available(V)	5 – 5
Bias and Control	DB-SUB Connector
Connector	SMA-Female
Current(mA)	±200
Power Handling(W)	1
Operating Temperature(°C)	0 ~ +50
Storage Temperature(°C)	-20 ~ +60
ROHS Compliant	Yes

Outline Drawing (Size: mm)

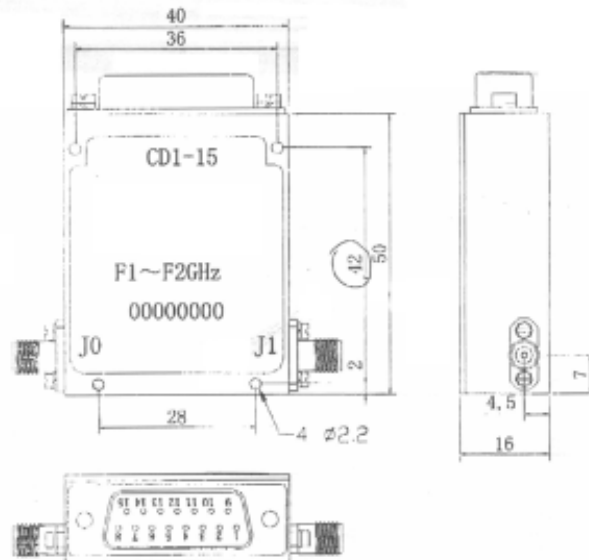

Data subject is to change without notice. For current data sheets, please contact: sales@aacix.com