
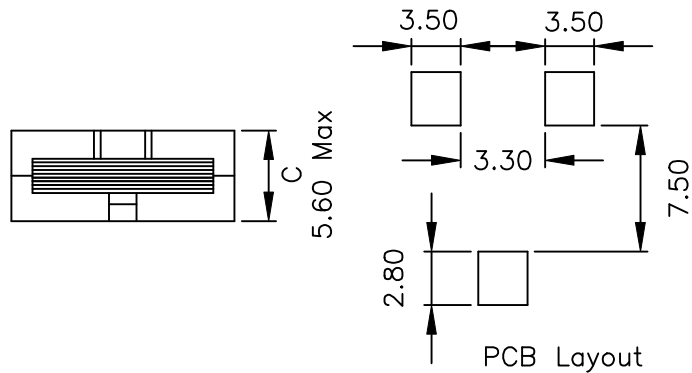



### 1. Mechanical:

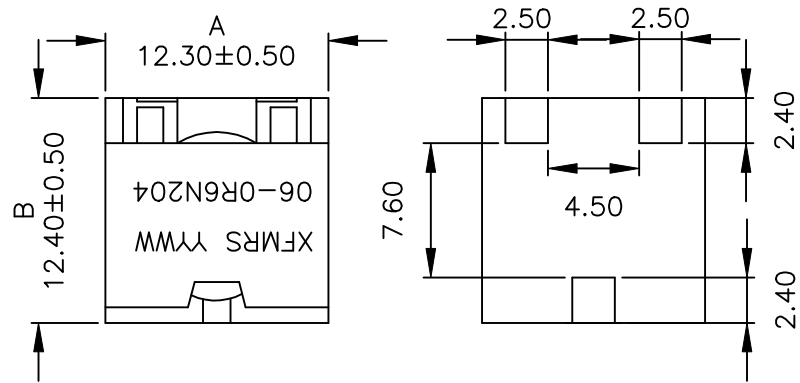

**Notes:**

1. Solderability: Leads shall meet MIL-STD-202, Method 208D for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Operating Temperature Range: -40°C to +85°C

### 2. Schematic:



### 3. ELECTRICAL SPECIFICATIONS: @25°C

OCL: 0.68uH±30% @100KHz, 0.25V, 0DC  
 CURRENT: 20.4 ADC Max, OCL DROP BY 25% Max  
 DC Res.: 1.5mOhms Max

DOC. REV A/1

<b>XFMRs Inc</b>	Title: <b>SM INDUCTOR</b>		
	UNLESS OTHERWISE SPECIFIED	P/N: XF121206-OR6N204	REV. A
TOLERANCES: .xx ±0.25	DWN.	李小锋	Sep-18-02
Dimensions in mm	CHK.	廖玉坤	Sep-18-02
SHEET 1 OF 1	APP.	BW	Sep-18-02