


# SAW Bandpass Filter 210401B



## 1. Features

- IF Bandpass Filter
- High Attenuation
- Single-Ended Operation
- DIP Package
- Maximum Storage Temperature Range : -40°C ~ 85°C
- Electrostatics Sensitive Device (ESD)

## 2. Package Dimension

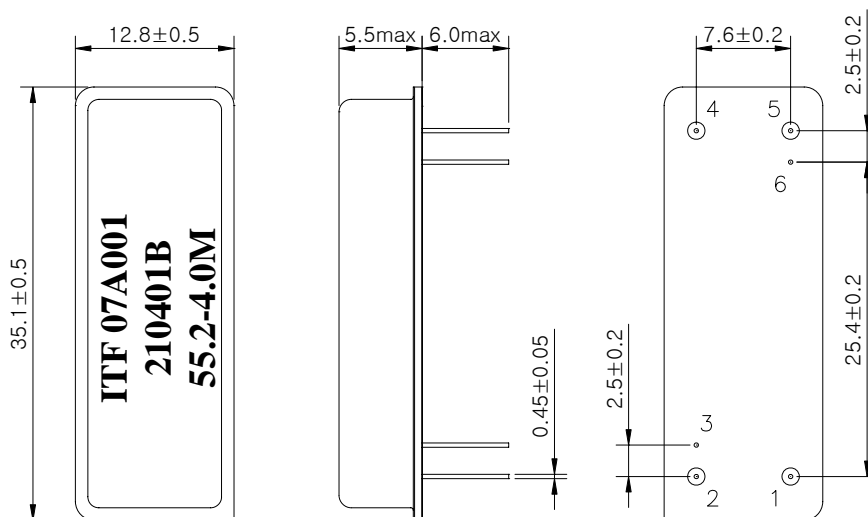

### Package : D3512


Dimensions shown are nominal in millimeters

Base : Fe(SPCC), Au plating over Ni plated

Cap : Cu & Cr Alloy, Ni Plated

Termination : Kovar, Au Plated

Pin Configuration	
1	Input
5	Output
2, 4	Ground
3, 6	Case ground

	<b>ITF Co., Ltd.</b> 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	210401B	
		Rev. Date	2007-04-13	
		Rev.	NM7014-CS01	1/5

# SAW Bandpass Filter 210401B



## 3. Specifications

Fo = 55.2 MHz


Terminating source impedance : 50Ω and matching network

Terminating load impedance : 50Ω and matching network

		Minimum	Typical	Maximum
Center Frequency	MHz	-	55.2	-
Insertion Loss	dB	-	24.0	25.5
1dB Bandwidth	MHz	-	4.05	-
3dB Bandwidth	MHz	4.2	4.28	-
40dB Bandwidth	MHz	-	5.2	5.3
Amplitude Ripple (fo±1.92 MHz)	dB	-	0.35	1.0
Group Delay Variation (fo±1.92 MHz)	nsec	-	80	150
Absolute Delay	usec	-	4.67	-
Ultimate Rejection	dB	50	52	-
Temperature Coefficient of Frequency	ppm/°C	-	-18	-

### Notes :

- 1) All specifications are based on the matching schematic shown below
- 2) All specifications are measured by Agilent Network analyzer and full 2 port calibration at room temperature
- 3) All attenuation measurements are measured relative to insertion loss


 Integrated Technology Future	<b>ITF Co., Ltd.</b> 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	210401B	
		Rev. Date	2007-04-13	
		Rev.	NM7014-CS01	2/5

# SAW Bandpass Filter 210401B



## 4. Matching Schematic

( Actual matching values may vary due to PCB layout and parasitics )

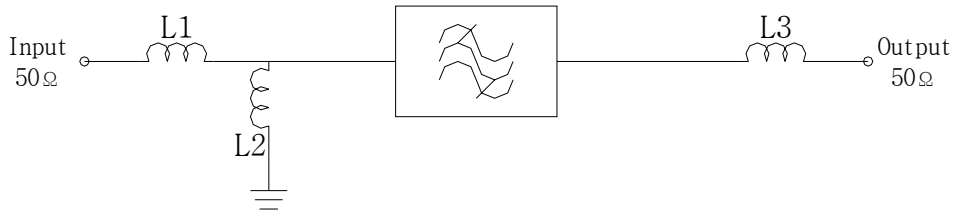

**L1=270H, L2=390nH, L3=330nH,**

## 5. Marking Configuration

ITF<sup>1)</sup> 07A001<sup>2)</sup>  
 210401B<sup>3)</sup>  
 55.2<sup>4)</sup> -4.0M<sup>5)</sup>



- 1) Manufacturer name
- 2) Lot Number
- 3) Part Number
- 4) Center Frequency
- 5) 1dB-Bandwidth

	<b>ITF Co., Ltd.</b> 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	210401B	
		Rev. Date	2007-04-13	
		Rev.	NM7014-CS01	3/5

# SAW Bandpass Filter 210401B







## 6. Typical Performance ( at +25°C )

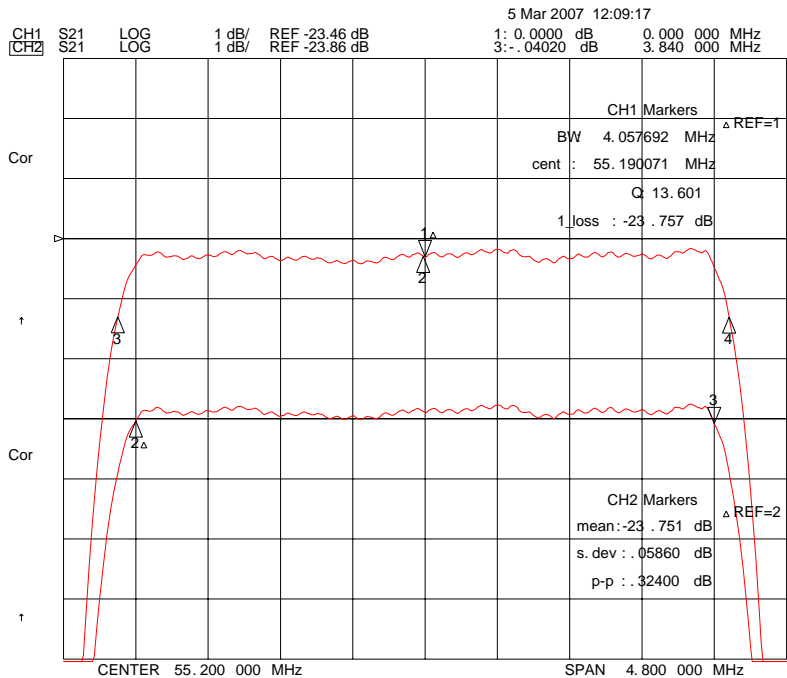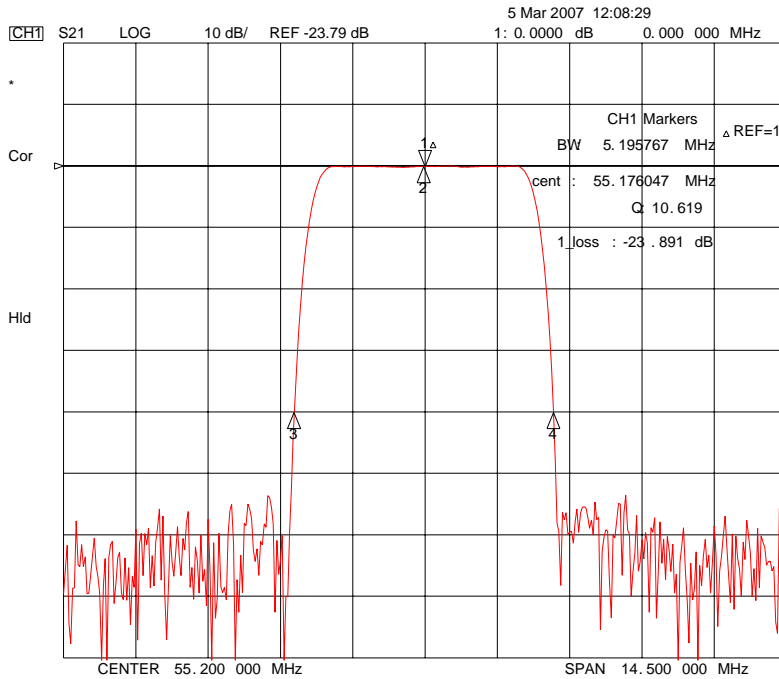

**ITF Co., Ltd.**  
 102-901, Bucheon Technopark 364,  
 Samjeong-Dong, Ojeong-Gu, Bucheon-City,  
 Gyeonggi-Do, Korea 421-809

Part No.	210401B	
Rev. Date	2007-04-13	
Rev.	NM7014-CS01	4/5

# SAW Bandpass Filter 210401B

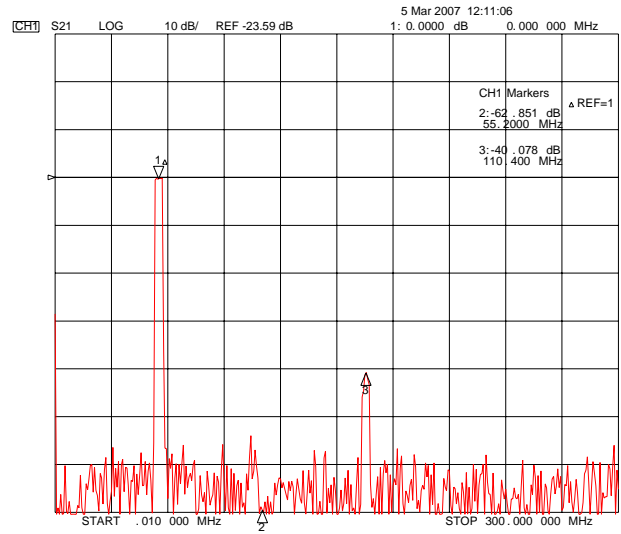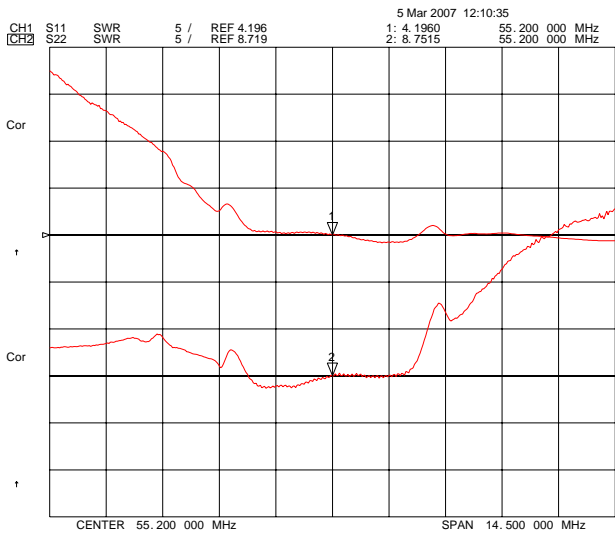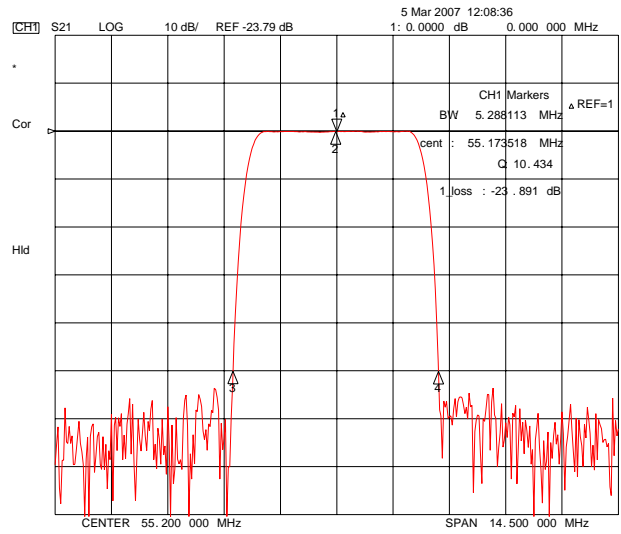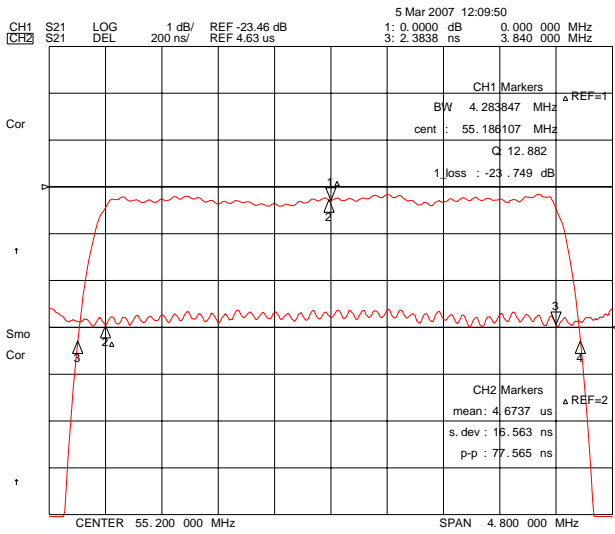

**ITF Co., Ltd.**  
 102-901, Bucheon Technopark 364,  
 Samjeong-Dong, Ojeong-Gu, Bucheon-City,  
 Gyeonggi-Do, Korea 421-809

Part No.	210401B	
Rev. Date	2007-04-13	
Rev.	NM7014-CS01	5/5