


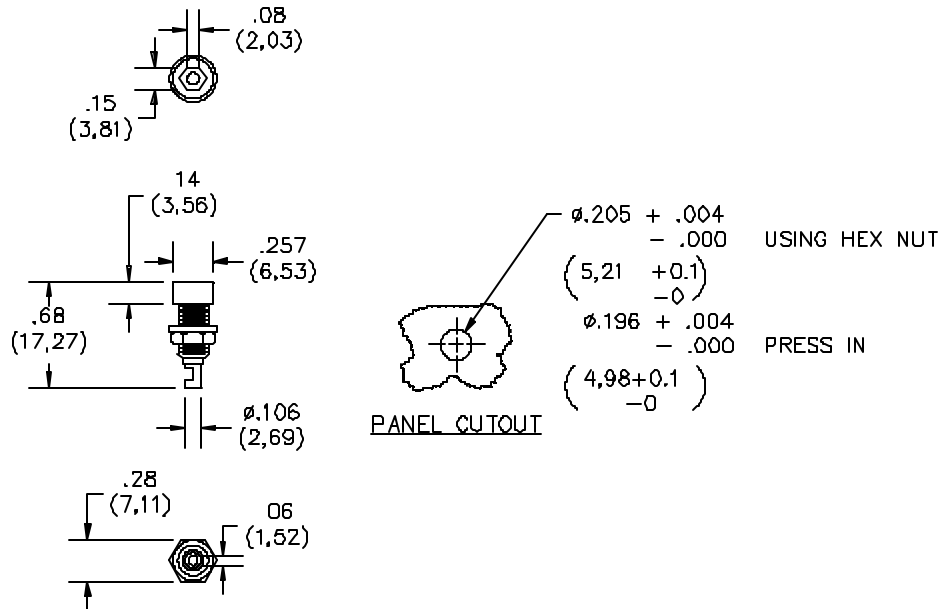

FEATURES:

- Banana jack is insulated from the panel
- Solder hole at the bottom of the jack allows for 18 to 22 AWG wire attachment
- Offered in six popular colors.
- Recommended maximum panel thickness: .31" (8.0 mm)

MATERIALS:

Banana Jack and Nut: Brass, Nickel Plated

Insulator: Nylon

RATINGS:

Operating Temperature: 500 VRMS

Current: 5 Amperes Max.

ORDERING INFORMATION: Model 5395-*

*= Color Code, Standard colors: -0 Black, -2 Red, -4 Yellow, -5 Green, -6 Blue and -9 White

Sold in packages of 10 per color.

All dimensions are in inches. Tolerances (except noted): .xx = $\pm .02$ " (.51 mm), .xxx = $\pm .005$ " (.127 mm).

All specifications are to the latest revisions. Specifications are subject to change without notice.

Registered trademarks are the property of their respective companies. Made in USA