

APPLIED CONCEPTS INC.

397 Route 281 - P.O. BOX 1175
 Tully, New York 13159-1175
 Phone: (315) 696-6676 Fax: (315) 696-9923
 www.acipower.com

AC3-12-1614

PRODUCT DATA SHEET - PAGE 1 OF 2

CCFL INVERTER

(For Multiple Tube Applications)

07/21/06

DESCRIPTION

The AC3-12-1614 is designed to power 2 CCFL's up to a power level of 11.5 watts from a nominal input voltage of +12V.

Enable control is accomplished @ pin 5 of CON1.

Intensity control is accomplished via a dc level @ pin 6 of CON1.

A DC reference voltage available @ pin 7 of CON1 for external use.

If desired, the pwm dimming frequency of the inverter can be synchronized to the LCD frame rate (Vsync) @ pin 8 of CON1.

The lamp outputs are open and short circuit protected.

This inverter is specifically designed to drive the Sharp 15 inch LGN2A display to a nominal brightness goal of 260 cd/m².

MECHANICAL / ENVIRONMENTAL

Weight = 21 grams

Altitude = 10,000 Ft maximum

Humidity < 85% non-condensing


Size (L x W x H) = 5.4 IN x 0.7 IN x 0.357 IN


PCB thickness = 0.062 IN

Mounting Holes = 0.120 IN diameter (X2)

Input Power & Control connector = CON1

CCFL Output Connectors = CON2, CON3

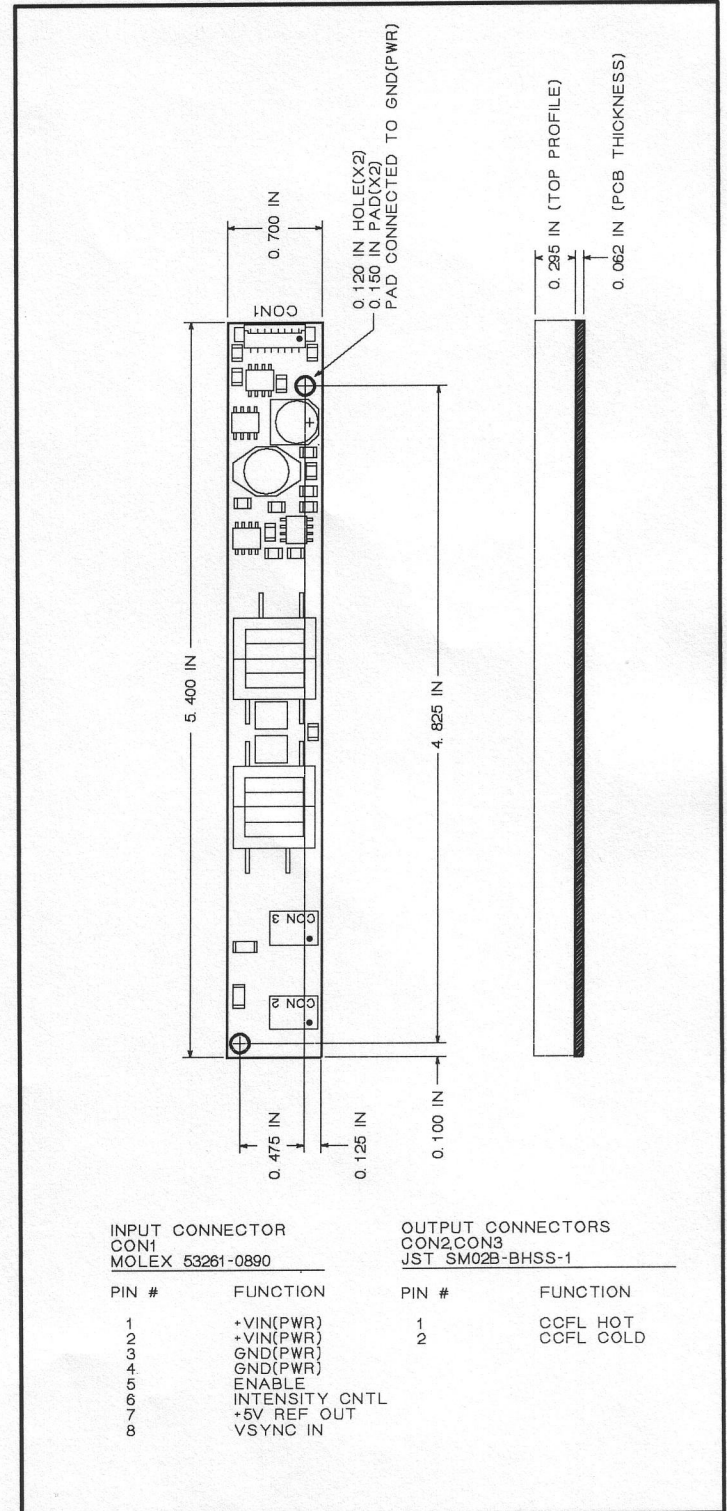



**APPLIED
CONCEPTS INC.**

397 Route 281 - P.O. BOX 1175
Tully, New York 13159-1175
Phone: (315) 696-6676 Fax: (315) 696-9923
www.acipower.com

AC3-12-1614

PRODUCT DATA SHEET - PAGE 2 OF 2

MAXIMUM RATINGS*

07/21/06

Symbol	Parameter	Value	Unit
Vin	Supply Voltage (Referenced to Ground)	-0.7 to 13.5	Vdc
Vip	Voltage applied to any Input Pin (Referenced to Ground)	-0.7 to 5.7	Vdc
Iop	Current sourced or sinked from any Output Pin	+/- 10	mAdc
Pin	Input Power (DC Input Voltage x DC Input Current)	16.5	W
Top	Operating Temperature (Still air ambient around Inverter)	0 to +70	DegC
Tstg	Storage Temperature	-40 to +105	DegC

* Maximum Ratings are those values beyond which damage to the inverter may occur

RECOMMENDED OPERATING CONDITIONS

Symbol	Parameter	Min	Max	Unit
Vin	Supply Voltage (Referenced to Ground)	11.4	12.6	Vdc
Lsv	Cold Cathode Fluorescent Lamp Sustaining Voltage	800	1300	Vrms
VSYif	Vertical Synchronization Input Frequency	48	62	Hz
Vcntl	Intensity Control Voltage	0.5	4.5	Vdc

ELECTRICAL CHARACTERISTICS

Vin = +12V, Lsv = 850 Vrms, Vcntl = +4.5V, Enable = +5V unless otherwise specified

Symbol	Parameter	Test Conditions	Min	Max	Unit
Lstart	Lamp Starting Voltage		2200		Vrms
LOavg	Average Lamp Output Current	Measured external of LGN2A	6.0	7.5	mArms
Lleff	Effective Lamp Current	Effective lamp current to achieve 260 cd/m2 per LGN2A spec	4.25	4.75	mArms
Lfreq	Lamp-Current Frequency		33.0	41.0	Khz
Pfreq	PWM Dimming Frequency	Vcntl (Pin 6) = +2.5V Vsync-In (Pin 8) = 0V Vsync-In (Pin 8) = 60Hz	95 119.8	101 120.2	Hz Hz
Pdc	PWM Duty Cycle Range	Vcntl (Pin 6) = 0.5 to +4.5V	0	100	%
ENoff	Enable Control	Unit OFF (Pin 5)		0.8	Vdc
ENon	Enable Control	Unit ON (Pin 5)	2.0		Vdc
VSYlo	Vertical Sync In	LO Level (Pin 8)		1.0	Vdc
VSYhi	Vertical Sync In	HI Level (Pin 8)	4.0		Vdc
+5Vout	+5V Reference Out	10k load to ground (Pin 7)	4.75	5.25	Vdc
Iin	Input Current Draw			1.3	Adc
Eff	Electrical Efficiency		90		%