

Specifications

Parameter	Unit	Minimum	Typical	Maximum
Center Frequency	MHz	79.875	80	80.125
Insertion Loss	dB	-	24.8	28
1 dB Bandwidth	MHz	-	10.04	-
1.5 dB Bandwidth	MHz	10.1	10.14	-
3 dB Bandwidth	MHz	-	10.31	-
18 dB Bandwidth	MHz	-	10.85	10.9
25 dB Bandwidth	MHz	-	10.97	11.2
30 dB Bandwidth	MHz	-	11.04	11.5
40 dB Bandwidth	MHz	-	11.17	12.5
Passband Variation	dB	-	0.9	1.5
Absolute Delay	usec	-	2.64	2.75
Ultimate Rejection(out of $f_0 \pm 6\text{MHz}$)	dB	40	45	-
Material Temperature coefficient	KHz/°C	-7.52		
Ambient Temperature	°C	25		
Package Size	DIP3512 (35.0x12.8x4.7mm3)			

Notes:

1. All specifications are based on the test circuit shown
2. In production, devices will be tested at room temperature to a guardbanded specification to ensure electrical compliance over temperature
3. Electrical margin has been built into the design to account for the variations due to temperature drift and manufacturing tolerances
4. This is the optimum impedance in order to achieve the performance show

Matching Configuration

INPUT
50 Ω



OUTPUT
50 Ω

Source/Load Impedance=50 ohm

Notes - Component values may change depending
on board layout.



SIPAT Co., Ltd.
(CETC No. 26 Research Institute)
Nanping Huayuan Road No. 14
Chongqing, China, 400060

Part Number

LBN08011

Rev. Date


2006-9-28

Rev.

1.0

Page 1/3

Package Dimension

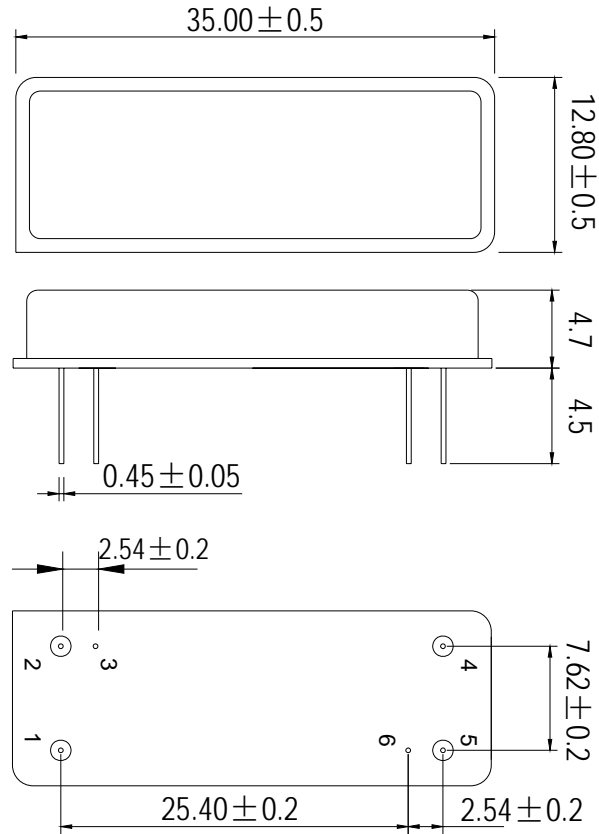

Input	1
Output	5
Ground	2,3,4,6

Package: DIP3512

Unit: mm




SIPAT Co., Ltd.
(CETC No. 26 Research Institute)
Nanping Huayuan Road No. 14
Chongqing, China, 400060


Part Number	LBN08011	
Rev. Date	2006-9-28	
Rev.	1.0	Page 2/3

Typical Performance


Frequency Respond

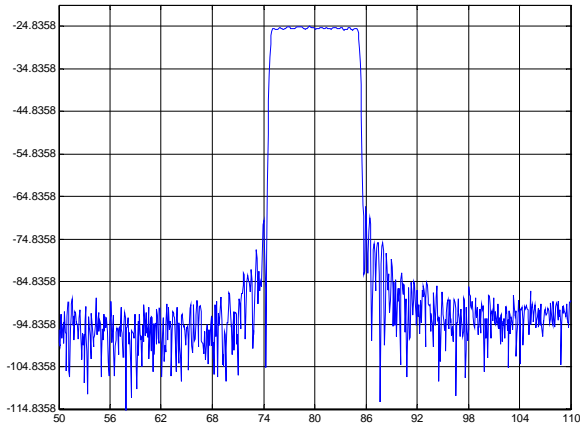


Passband Respond

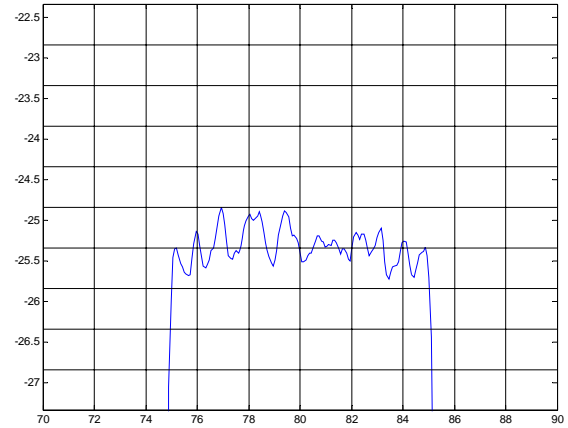


Group Delay Variation(f0±5MHz)

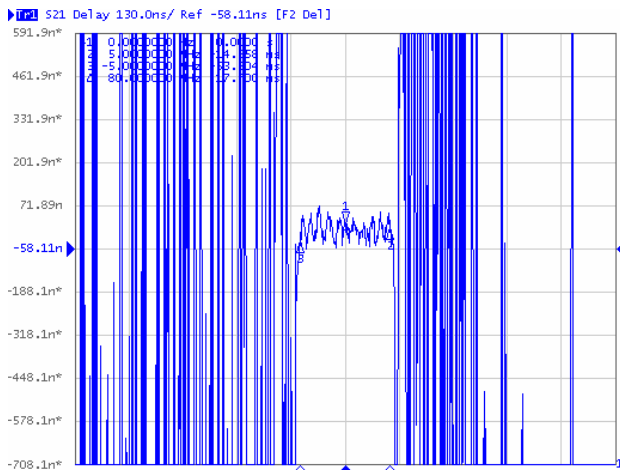


Phase Linearity(f0±5MHz)

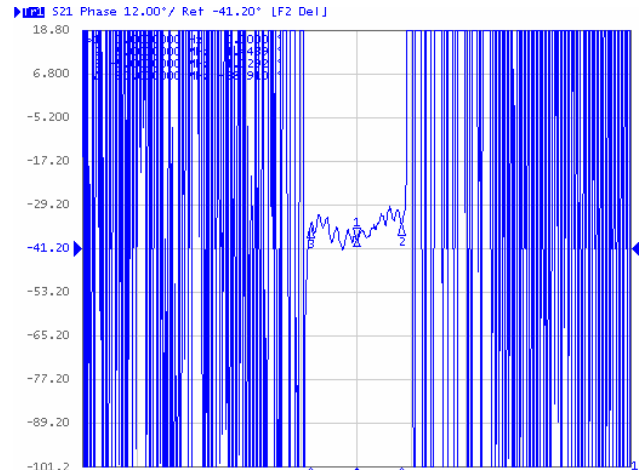

Smith Chart S11

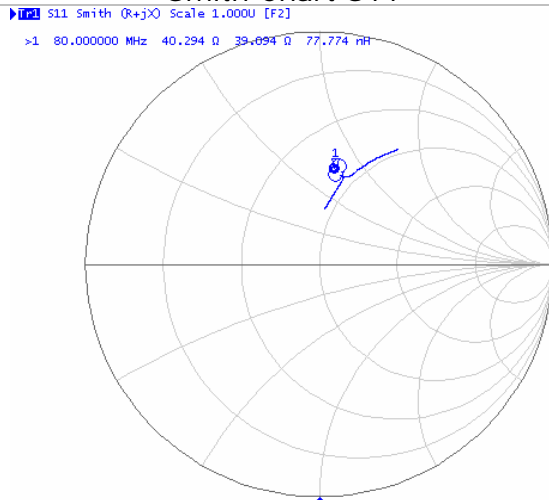

Smith Chart S22

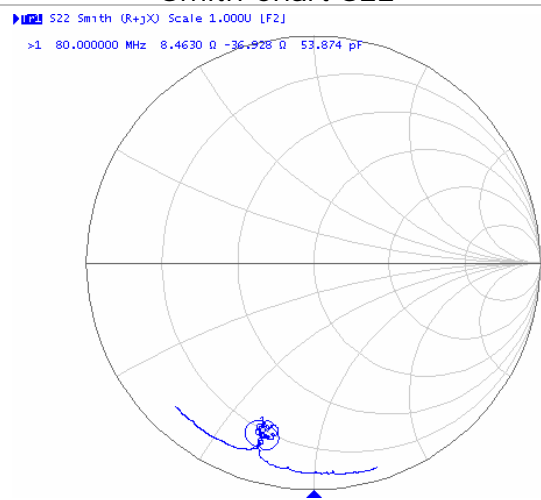

SIPAT Co., Ltd.
(CETC No. 26 Research Institute)
Nanping Huayuan Road No. 14
Chongqing, China, 400060

Part Number LBN08011

Rev. Date 2006-9-28

Rev. 1.0

Page 3/3