



Technical Data Sheet

5mm Silicon PIN Photodiode , T-1 3/4


PD333-3C/H0/L2

Features

- Fast response time
- High photo sensitivity
- Small junction capacitance
- Pb free
- The product itself will remain within RoHS compliant version.

Descriptions

PD333-3C/H0/L2 is a high speed and high sensitive PIN photodiode in a standard 5 ϕ plastic package. Due to its water clear epoxy the device is sensitive to visible and infrared radiation.

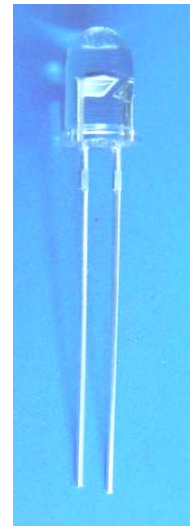


Applications

- High speed photo detector
- Security system
- Camera

Device Selection Guide

| LED Part No. | Chip | Lens Color |
|--------------|----------|-------------|
| | Material | |
| PD | Silicon | Water clear |

Package Dimensions

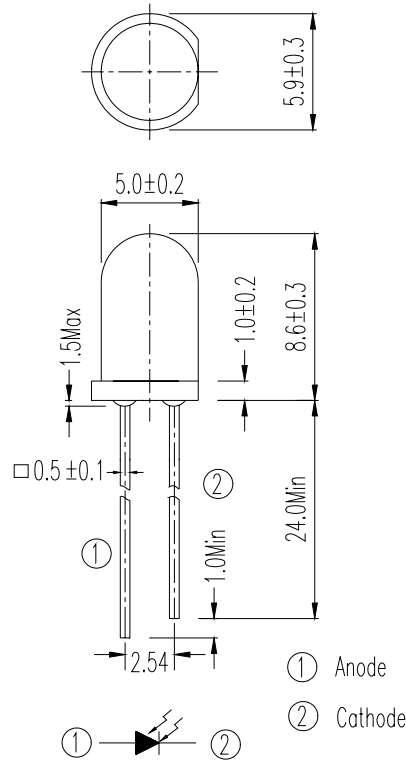

- Notes:** 1.All dimensions are in millimeters
2.Tolerances unless dimensions ± 0.25 mm

Absolute Maximum Ratings (Ta=25°C)

| Parameter | Symbol | Rating | Units |
|----------------------------|-----------|-----------|-------|
| Reverse Voltage | V_R | 32 | V |
| Power Dissipation | P_d | 150 | mW |
| Lead Soldering Temperature | T_{sol} | 260 | °C |
| Operating Temperature | T_{opr} | -25 ~ +85 | °C |
| Storage Temperature | T_{stg} | -40 ~ +85 | °C |

Notes: *1:Soldering time ≤ 5 seconds.

Electro-Optical Characteristics (Ta=25°C)

| Parameter | Symbol | Condition | Min. | Typ. | Max. | Units |
|--------------------------------|-----------------|--|------|-------|------|---------------|
| Rang of Spectral Bandwidth | $\lambda_{0.5}$ | ----- | 400 | --- | 1100 | nm |
| Wavelength of Peak Sensitivity | λ_p | ----- | --- | 940 | --- | nm |
| Open-Circuit Voltage | V_{OC} | Ee=5m W/cm ² $\lambda_p=940\text{nm}$ | --- | 0.39 | --- | V |
| Short- Circuit Current | I_{SC} | Ee=1m W/cm ² $\lambda_p=940\text{nm}$ | --- | 40 | --- | μA |
| Reverse Light Current | I_L | Ee=1m W/cm ² $\lambda_p=940\text{nm}$ $V_R=5\text{V}$ | 36 | 40 | --- | |
| Dark Current | I_d | Ee=0m W/cm ² $V_R=10\text{V}$ | --- | 5 | 30 | nA |
| Reverse Breakdown | BV_R | Ee=0m W/cm ² $I_R=100\mu\text{A}$ | 32 | 170 | --- | V |
| Total Capacitance | C_t | Ee=0m W/cm ² $V_R=5\text{V}$ $f=1\text{MHZ}$ | --- | 18 | --- | pF |
| Rise/Fall Time | t_r/t_f | $V_R=10\text{V}$ $R_L=1\text{K}\Omega$ | --- | 45/45 | --- | nS |
| View Angle | $2\theta_{1/2}$ | $I_F=20\text{mA}$ | -- | 80 | -- | deg |

Typical Electro-Optical Characteristics Curves

Fig.1 Power Dissipation vs. Ambient Temperature

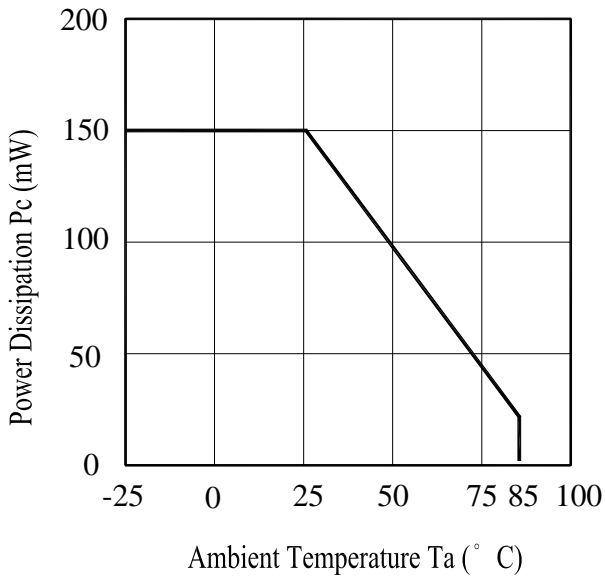


Fig.2 Spectral Sensitivity

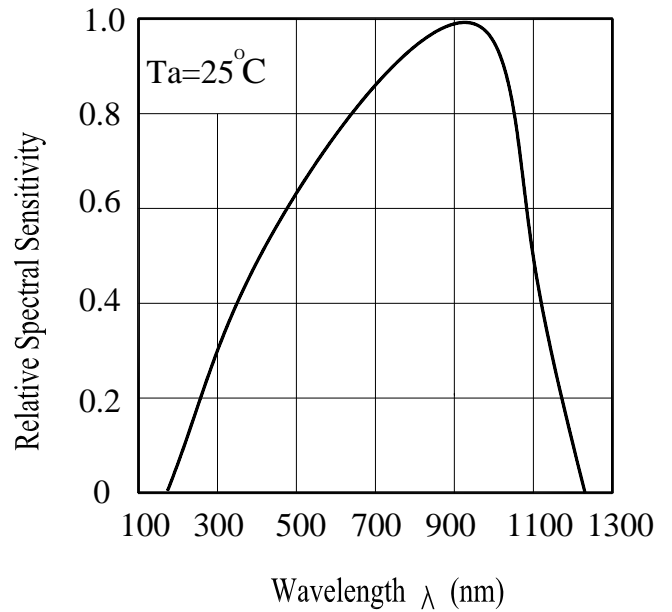


Fig.3 Dark Current vs. Ambient Temperature


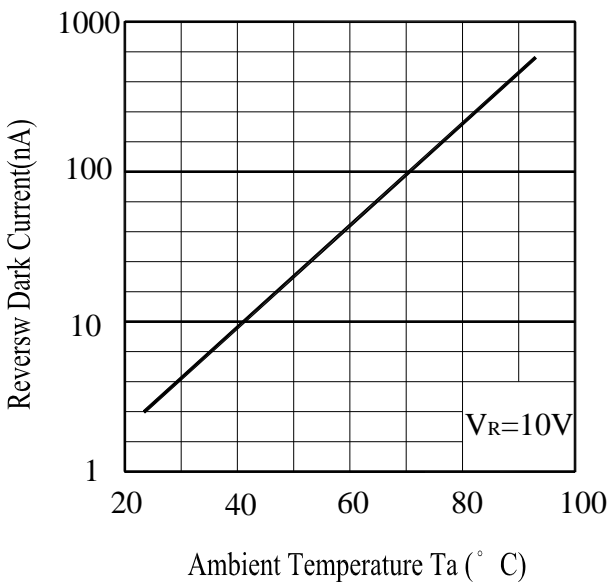


Fig. 4 Reverse Light Current vs. Ee

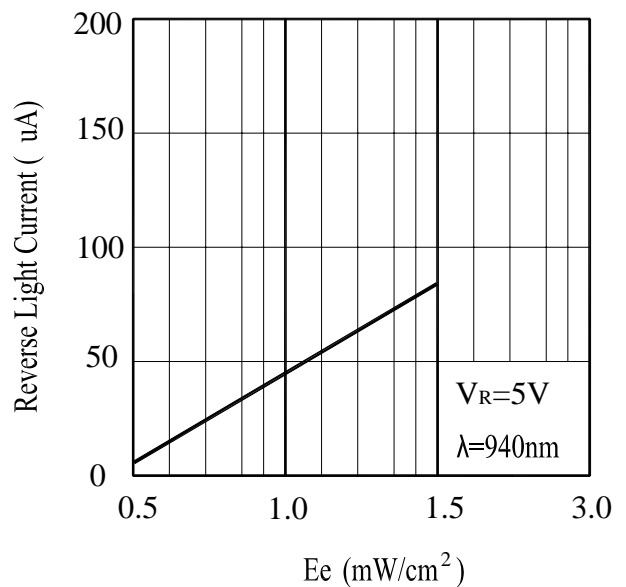

Typical Electro-Optical Characteristics Curves

Fig.5 Terminal Capacitance vs.

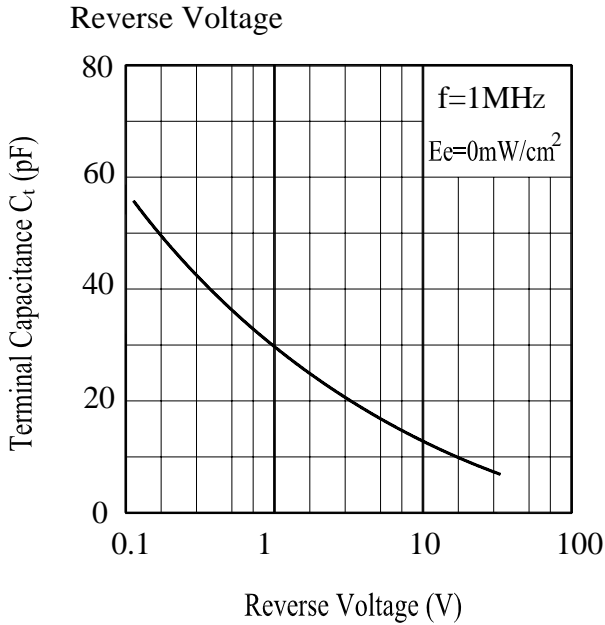


Fig.6 Response Time vs.

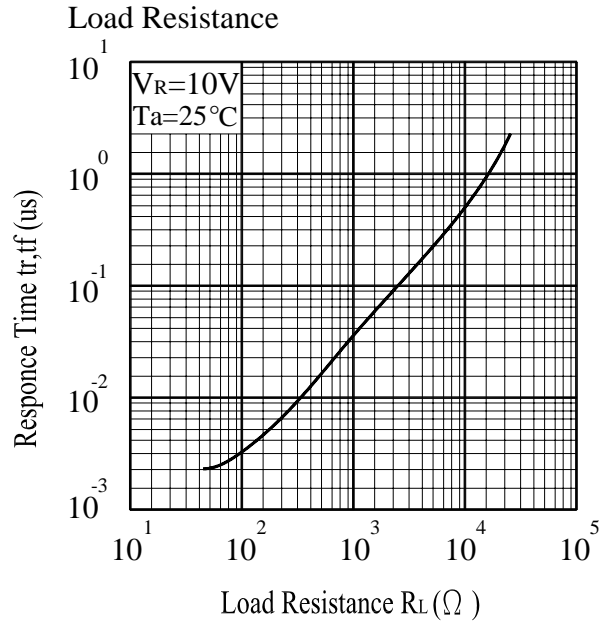


Fig.7 Relative Reverse Light Current vs. Ambient Temperature(°C)


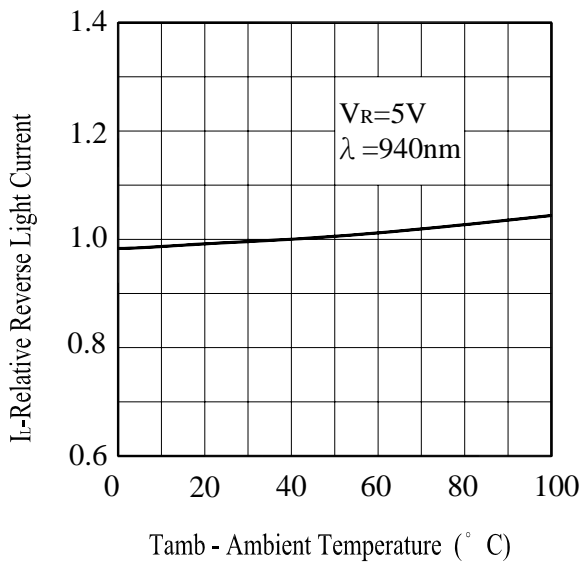


Fig.8 Relative Radiant Intensity vs. Angular Displacement

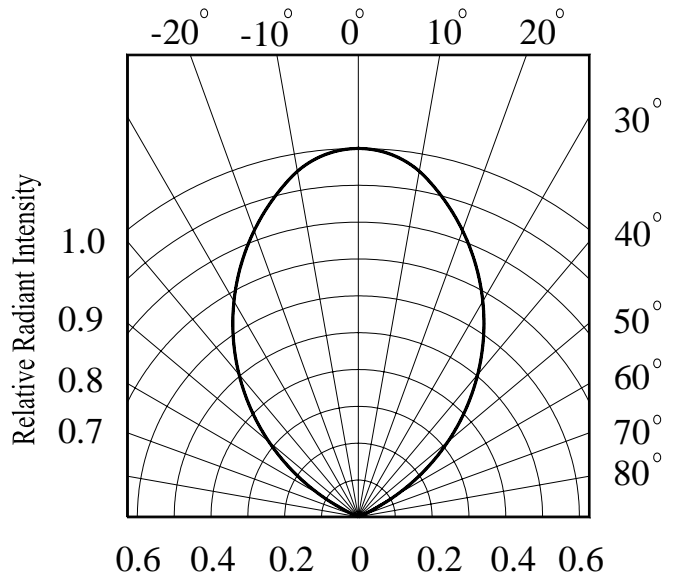

Reliability Test Item And Condition

The reliability of products shall be satisfied with items listed below.

Confidence level : 90%

LTPD : 10%

| NO. | Item | Test Conditions | Test Hours/ Cycles | Sample Sizes | Failure Judgement Criteria | Ac/R e |
|-----|------------------------------------|---|-----------------------|-----------------|--|-----------|
| 1 | Solder heat | TEMP. : 260°C±5°C | 10secs | 22pcs | $I_L \leq L \times 0.8$ L : Lower Specification Limit | 0/1 |
| 2 | Temperature Cycle | H : +100°C 15mins ↑ ↓ 5mins L : -40°C 15mins | 300Cycles | 22pcs | | 0/1 |
| 3 | Thermal Shock | H : +100°C 5mins ↑ ↓ 10secs L : -10°C 5mins | 300Cycles | 22pcs | | 0/1 |
| 4 | High Temperature Storage | TEMP. : +100°C | 1000hrs | 22pcs | | 0/1 |
| 5 | Low Temperature Storage | TEMP. : -40°C | 1000hrs | 22pcs | | 0/1 |
| 6 | DC Operating Life | V _R =5V | 1000hrs | 22pcs | | 0/1 |
| 7 | High Temperature/ High Humidity | 85°C / 85% R.H | 1000hrs | 22pcs | | 0/1 |




PD333-3C/H0/L2

Packing Quantity Specification

1.500PCS/1Bag · 5Bags/1Box

2.10Boxes/1Carton

Label Form Specification

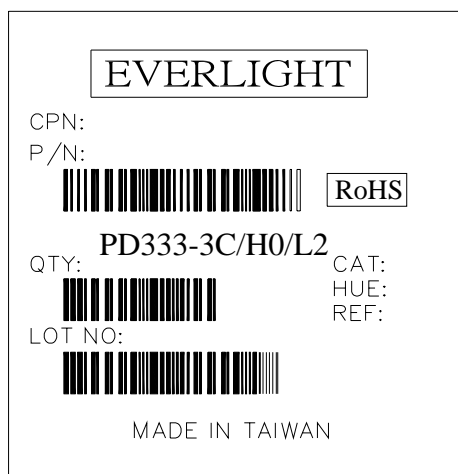

CPN: Customer's Production Number

P/N : Production Number

QTY: Packing Quantity

CAT: Ranks

HUE: Peak Wavelength

REF: Reference

LOT No: Lot Number

MADE IN TAIWAN: Production Place

Notes

1. Above specification may be changed without notice. EVERLIGHT will reserve authority on material change for above specification.
2. When using this product, please observe the absolute maximum ratings and the instructions for using outlined in these specification sheets. EVERLIGHT assumes no responsibility for any damage resulting from use of the product which does not comply with the absolute maximum ratings and the instructions included in these specification sheets.
3. These specification sheets include materials protected under copyright of EVERLIGHT corporation. Please don't reproduce or cause anyone to reproduce them without EVERLIGHT's consent.

EVERLIGHT ELECTRONICS CO., LTD.

Office: No 25, Lane 76, Sec 3, Chung Yang Rd,
Tucheng, Taipei 236, Taiwan, R.O.C

Tel: 886-2-2267-2000, 2267-9936

Fax: 886-2267-6244, 2267-6189, 2267-6306

<http://www.everlight.com>